


DELLUX LIGHTING



**Manufactured in Austria
and China with *TRIDONIC* Technology**



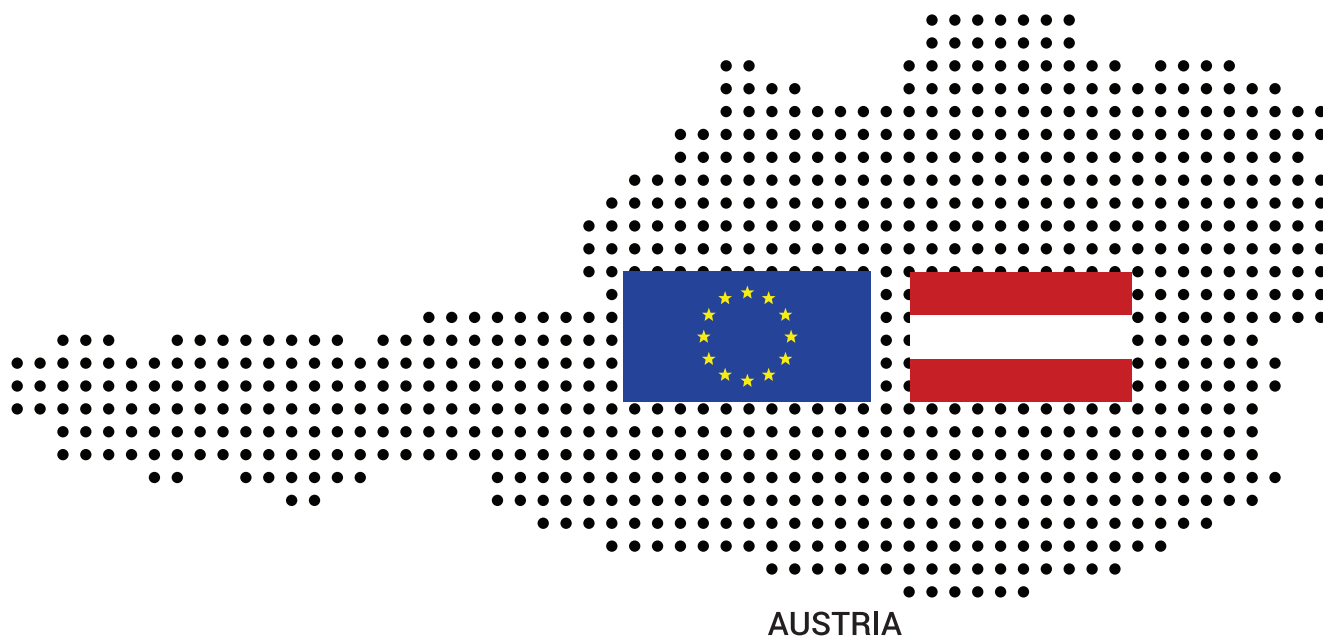

06-Lamps

A photograph of two ornate brass candlesticks with lit white candles, placed on a silver tray. To the right is a brass vase. The entire set is on a round wooden table. The background is dark and textured.

LAMPS

06





describe


- ① **Material and technology:** aluminum + plastic
- ② **Optical lens:** milky cover with good light transmission
- ③ **Reflector:**
- ④ **Light source (chip + package / brand + type):** SMD 2835 1B10C
- ⑤ **Drive:** Non-isolated constant current drive
- ⑥ **Applicable working environment:** table lamp, chandelier, downlight, ceiling lamp
- ⑦ **Surface treatment:** spray white

Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥ 90
Ta: 45°C
Material: Aluminum+PC
Lamp Holder: E27/B22


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-B0109-D	9W	200°	900Lm	Φ60mm
DU-B0112-D	12W	200°	1300Lm	Φ70mm

design philosophy


Replacement type, durable, bright and energy-saving, can be dimmed according to the scene, expand 1.5KV lightning surge, smooth outline.



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
 LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**
Powering your idea



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

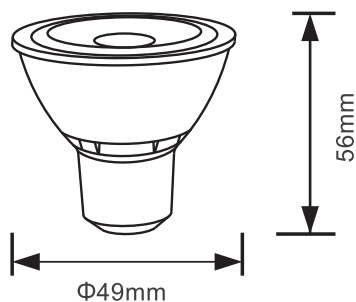

describe




- ① **Material and technology:** plastic, integrally formed.
- ② **Optical lens:** Highly transparent lens
- ③ **Reflector:**
- ④ **Light source (chip + package / brand + type):** SMD 2835 1p7s
- ⑤ **Drive:** non-isolated constant current drive
- ⑥ **Applicable working environment:** home lighting (aisle, kitchen, bedroom), commercial lighting (such as display cabinets)
- ⑦ **Surface treatment:** surface spray white

Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥90
Ta: 45°C
Material: Aluminum+PC
Lamp Holder: GU5.3/GU10


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-LC3206-D	6W	38°	480Lm	Φ49x56mm

design philosophy

exquisite workmanship and novel outline.
 Beam angle 38°, dimming according to the atmosphere.
 The high Ramakes the colors more realistic.

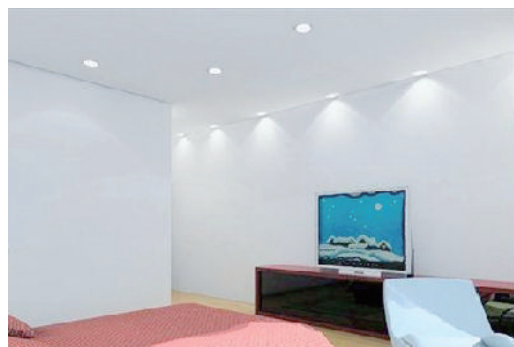

Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
 LED Drivers - PHILIPS
 LED Drivers - CREE
 LED Drivers - SAMSUNG
 LED Drivers - BRIDGELUX
 LED Drivers - SHARP
 LED Drivers - SAMSUNG






LED Chips - PHILIPS CITIZEN
 BRIDGELUX. CREE SHARP SAMSUNG



Model No: DU-LC1307	Surface Treatment: WH
Power: SMD 7W	Lamp Holder: Gu5.3/Gu10
Input Voltage: AC220-240V 50/60Hz	Life Span: 30000H
Luminous Flux: 600Lm	Material: Alum+PC
CRI: ≥80	Working Temperature: -10~45° C
Beam Angle: 38°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: Φ50*49mm



DU-LC1307






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-LC1303	SMD 3W	240Lm	38°	WH	Φ50x49mm
DU-LC1307	SMD 7W	600Lm	38°	WH	Φ50x49mm
DU-LC1307D	SMD 6W	Dimmable 0~500Lm	38°	WH	Φ50x49mm

Model No: DU-LC2706	Surface Treatment: WH
Power: SMD 6W	Lamp Holder: G53/Gu10
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 480Lm	Material: Alum+PC
CRI: ≥80	Working Temperature: -10~45° C
Beam Angle: 35°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: Φ50*53mm



DU-LC2706








Model No: DU-B0808	Surface Treatment: Clear/Amber
Power: Filament 8*1W	Lamp Holder: E14/E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 1050Lm	Material: Alum+Glass
CRI: ≥80	Working Temperature: -10~45° C
Beam Angle: 360°	IP: 50
Color Temperature: 6500/4000/3000/2700K	Body Size: Φ60*104mm




DU-B0808






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-B0808	Filament 8x1W	1050Lm	360°	Clear/Amber	Φ60x104mm
DU-B0404-G45	Filament 3.5W	480Lm	360°	Clear/Amber	Φ45x80mm

Model No: DU-CB0404	Surface Treatment: Clear
Power: Filament 4*1W	Lamp Holder: E14/E27
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 480Lm	Material: Alum+Glass
CRI: ≥80	Working Temperature: -10~45° C
Beam Angle: 360°	IP: 50
Color Temperature: 6500/4000/3000/2700K	Body Size: Φ35*117mm

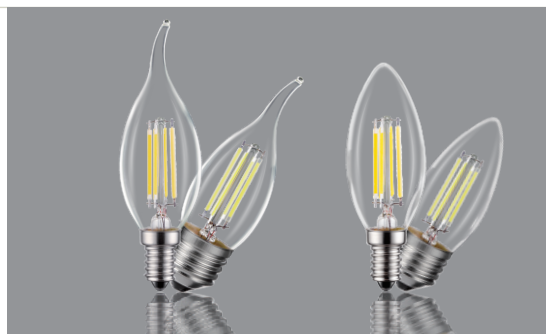

DU-CB0404



Products list


Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-CB0404	Filament 4x1W	480Lm	360°	Clear/Amber	Φ35x117mm
DU-CB0404D	Filament 4x1W	Dimmable 50~480Lm	360°	Clear/Amber	Φ35x117mm
DU-TB0404	Filament 4x1W	480Lm	360°	Clear/Amber	Φ35x100mm
DU-TB0404D	Filament 4x1W	Dimmable 50~480Lm	360°	Clear/Amber	Φ35x100mm




Model No: DU-B1110-B	Surface Treatment: WH
Power: SMD 9W	Lamp Holder: E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 950Lm	Material: Alum+PC
CRt: ≥80	Working Temperature: -10~45° C
Beam Angle: 200°	IP: 50
Color Temperature: 6500/4000/3000K	Body Size: Φ60*108/117mm



DU-B1110-B



Imax=118cd



Lx/m

M	Ix
1.0	117.16
2.0	29.29
3.0	13.02
4.0	7.32

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-B1105	SMD 4.5W	420Lm	200°	WH	Φ50x96mm
DU-B1110-B	SMD 9W	950Lm	200°	WH	Φ60x108/117mm
DU-B1114-A	SMD 12W	1400Lm	200°	WH	Φ70x134/127mm
DU-B1116	SMD 15W	1600Lm	200°	WH	Φ80x146mm



Model No: DU-B1110-BF	Surface Treatment: WH
Power: SMD 9W	Lamp Holder: E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 30000H
Luminous Flux: 820Lm	Material: Alum+PC
CRt: ≥80	Working Temperature: -10~45° C
Beam Angle: 180°	IP: 20
Color Temperature: 3 Color	Body Size: Φ60*111mm



Model No: DU-B1110-BD	Surface Treatment: WH
Power: SMD 9W	Lamp Holder: E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 30000H
Luminous Flux: 820Lm	Material: Alum+PC
CRt: ≥80	Working Temperature: -10~45° C
Beam Angle: 180°	IP: 20
Color Temperature: Dimmer 6500/4000/3000K	Body Size: Φ60*111mm







Model No: DU-CB1506	Surface Treatment: Clear+WH
Power: SMD 6W	Lamp Holder: E14
Input Voltage: AC220-240V 50/60Hz	Life Span: 30000H
Luminous Flux: 480Lm	Material: Alum+PC
CRI: ≥80	Working Temperature: -10~45° C
Beam Angle: 360°	IP: 50
Color Temperature: 6500/4000/3000K	Body Size: Φ37*127mm



DU-CB1506



Lx/m

M	lx
1.0	75.85
2.0	18.46
3.0	8.03
4.0	4.62

Di Dv


Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-CB1506	SMD 6W	480Lm	360°	Clear+WH	Φ37x127mm
DU-TB1506	SMD 6W	480Lm	360°	Clear+WH	Φ37x114mm
DU-CB1505	SMD 5W	420Lm	360°	Diffuse+WH	Φ37x127mm
DU-TB1505	SMD 5W	420Lm	360°	Diffuse+WH	Φ37x114mm

Item NO: DU-CB1605	Surface Treatment: GL/SL
Power: SMD 5W	Lamp Holder: E14
Input Voltage: AC220-240V 50/60Hz	Life Span: 30000H
Luminous Flux: 500Lm	Material: AlHiron+Glass
CRI: ≥80	Working Temperature: -10~45° C
Beam Angle: 360°	IP: 50
Color Temperature: 6500/4000/3000K	Product Size: Φ34*130mm



DU-CB1605



Lx/m

M	lx
1.0	57.85
2.0	14.46
3.0	6.43
4.0	3.62

Di Dv

Products list



Item NO.	Power	Luminous Flux	Beam angle	Surface	Specification
DU-CB1605	SMD 5W	500Lm	360°	GL/SL	Φ34x130mm
DU-TB1605	SMD 5W	500Lm	360°	GL/SL	Φ34x115mm



Model No: DU-B3324	Surface Treatment: WH
Power: SMD 24W	Lamp Holder: E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 2000Lm	Material: Alum+PC
CRI: ≥ 80	Working Temperature: -10~45° C
Beam Angle: 270°	IP: 50
Color Temperature: 6500/4000/3000K	Body Size: $\Phi 80 \times 154$ mm



DU-B3324



Lx/m

M	Ix
1.0	223.96
2.0	56.24
3.0	29.02
4.0	15.32



Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-B3324	SMD 24W	2000Lm	270°	WH	$\Phi 80 \times 154$ mm
DU-B3335	SMD 35W	3000Lm	270°	WH	$\Phi 100 \times 185$ mm
DU-B3345	SMD 45W	4000Lm	270°	WH	$\Phi 125 \times 215$ mm
DU-B3365	SMD 65W	6000Lm	270°	WH	$\Phi 165 \times 275$ mm

Model No: DU-B3215	Surface Treatment: WH
Power: SMD 15W	Lamp Holder: E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 1550Lm	Material: Alum+PC
CRI: ≥ 85	Working Temperature: -10~45° C
Beam Angle: 180°	IP: 50
Color Temperature: 6500/4000/3000K	Body Size: $\Phi 51 \times 145$ mm



DU-B3215



Lx/m

M	Ix
1.0	153.72
2.0	38.43
3.0	19.54
4.0	10.65

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-B3205	SMD 5W	480Lm	180°	WH	$\Phi 37 \times 97$ mm
DU-B3209	SMD 9W	770Lm	180°	WH	$\Phi 37 \times 116$ mm
DU-B3212	SMD 12W	1000Lm	180°	WH	$\Phi 42 \times 142$ mm
DU-B3215	SMD 15W	1550Lm	180°	WH	$\Phi 51 \times 145$ mm



220V-E14-2.5W-2835-51D

Model No: DUMODIE14	Surface Treatment: Clear
Power: SMD 2.5W	Lamp Holder: E14
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 100lm/W	Material: PC
CRt: ≥75	Working Temperature: -10~45° C
Beam Angle: 300°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: Φ18*69mm



220V-G9-3.5W-2835-22D

Model No: DUMODIG9	Surface Treatment: Diffuse
Power: SMD 3.5W	Lamp Holder: G9
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 80lm/W	Material: PC
CRt: ≥80	Working Temperature: -10~45° C
Beam Angle: 300°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: Φ14*51mm



220V-G4-2W-2835-33D

Model No: DUMODIG4	Surface Treatment: Clear
Power: SMD 2W	Lamp Holder: G4
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 90lm/W	Material: PC
CRt: ≥80	Working Temperature: -10~45° C
Beam Angle: 300°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: Φ14*40mm



AD-12V-G4-2.5W-2835-33D

Model No: DUMODIG4	Surface Treatment: Clear
Power: SMD 2.5W	Lamp Holder: G4
Input Voltage: AC/DC12V	Life Span: 25000H
Luminous Flux: 90lm/W	Material: PC
CRt: ≥80	Working Temperature: -10~45° C
Beam Angle: 300°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: Φ14*40mm



Model No: DU-B2505	Surface Treatment: WH
Power: SMD 5W	Lamp Holder: E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 360lm	Material: Alum+Glass+PC
CRt: ≥80	Working Temperature: -10~45° C
Beam Angle: 270°	IP: 20
Color Temperature: WW	Body Size: Φ49*128mm








Model No: DU-S3U09T	Surface Treatment: Clear
Power: SMD 9W	Lamp Holder: E27/B22
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 630Lm	Material: Alum+Glass+PC
CRI: ≥ 70	Working Temperature: -10°C - 45°C
Beam Angle: 270°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: $\Phi 42 \times 141\text{mm}$




DU-S3U09T



Products list




Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-S3U09T	SMD 9W	630Lm	270°	WH	$\Phi 42 \times 141\text{mm}$
DU-S3U012T	SMD 12W	1200Lm	270°	WH	$\Phi 42 \times 142\text{mm}$
DU-S3U016T	SMD 16W	1120Lm	270°	WH	$\Phi 52 \times 172\text{mm}$
DU-M4U18T	SMD 18W	1800Lm	270°	WH	$\Phi 58 \times 179\text{mm}$
DU-B4U24T	SMD 24W	2400Lm	270°	WH	$\Phi 72 \times 220\text{mm}$
DU-B4U36T	SMD 36W	3600Lm	270°	WH	$\Phi 71 \times 250\text{mm}$

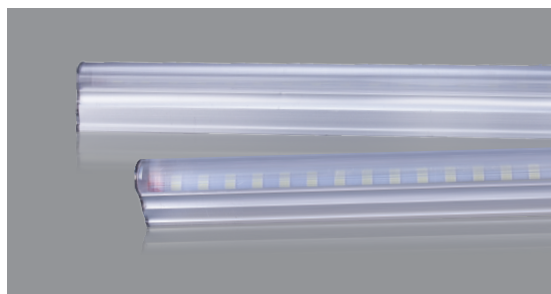

Model No: DU-T5030	Surface Treatment: Clear
Power: SMD 6W	Lamp Holder: /
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 350Lm	Material: Alum+PC
CRI: ≥ 70	Working Temperature: -10°C - 45°C
Beam Angle: 120°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: $300 \times 20 \times 30\text{mm}$




DU-T5030



Products list




Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-T5030	SMD 6W	350Lm	120°	Clear	$300 \times 20 \times 30\text{mm}$
DU-T5060	SMD 12W	750Lm	120°	Clear	$600 \times 20 \times 30\text{mm}$
DU-T5090	SMD 18W	1150Lm	120°	Clear	$900 \times 20 \times 30\text{mm}$
DU-T50120	SMD 22W	1550Lm	120°	Clear	$1200 \times 20 \times 30\text{mm}$

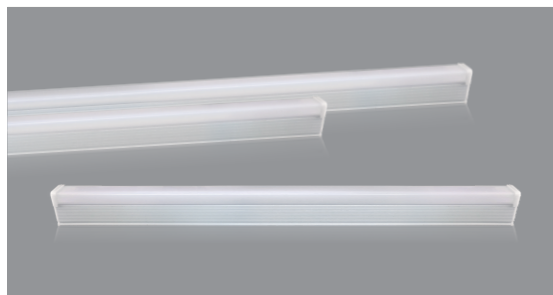

Model No: DU-T530S-8Y	Surface Treatment: Diffuse/Clear
Power: SMD 8W	Lamp Holder: /
Input Voltage: AC220-240V 50/60Hz	Life Span: 30000H
Luminous Flux: 800Lm	Material: Alum+PC
CRI: ≥80	Working Temperature: -10~45° C
Beam Angle: 120°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: 300*22*34mm




DU-T530S-8Y






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-T530S-8Y	SMD 8W	800Lm	120°	Diffuse /Clear	300x22x34mm
DU-T560S-16Y	SMD 16W	1450Lm	120°	Diffuse /Clear	600x22x34mm
DU-T590S-24Y	SMD 24W	2100Lm	120°	Diffuse /Clear	900x22x34mm
DU-T5120S-32Y	SMD 32W	2800Lm	120°	Diffuse /Clear	1200x22x34mm

Model No: DU-T5060F	Surface Treatment: Diffuse
Power: SMD 12W	Lamp Holder: /
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 750Lm	Material: Alum+PC
CRI: ≥70	Working Temperature: -10~45° C
Beam Angle: 120°	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: 600*20*30mm



DU-T5060F



Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-T5030F	SMD 6W	350Lm	120°	Diffuse	300x20x30mm
DU-T5060F	SMD 12W	750Lm	120°	Diffuse	600x20x30mm
DU-T5090F	SMD 18W	1150Lm	120°	Diffuse	900x20x30mm
DU-T50120F	SMD 22W	1550Lm	120°	Diffuse	1200x20x30mm
DU-T8120S-40Y	SMD 40W	3500Lm	120°	Diffuse	1200x32x34mm



PRODUCT 2020 CATALOGUE

Sonnleithnergasse 2/4/44Wien 1100
Österreich
Vienna - Austril

Contact us:
T: +43 676 449 0575
E: info@deluxlight.eu