


DELLUX LIGHTING



**Manufactured in Austria
and China with *TRIDONIC Technology***



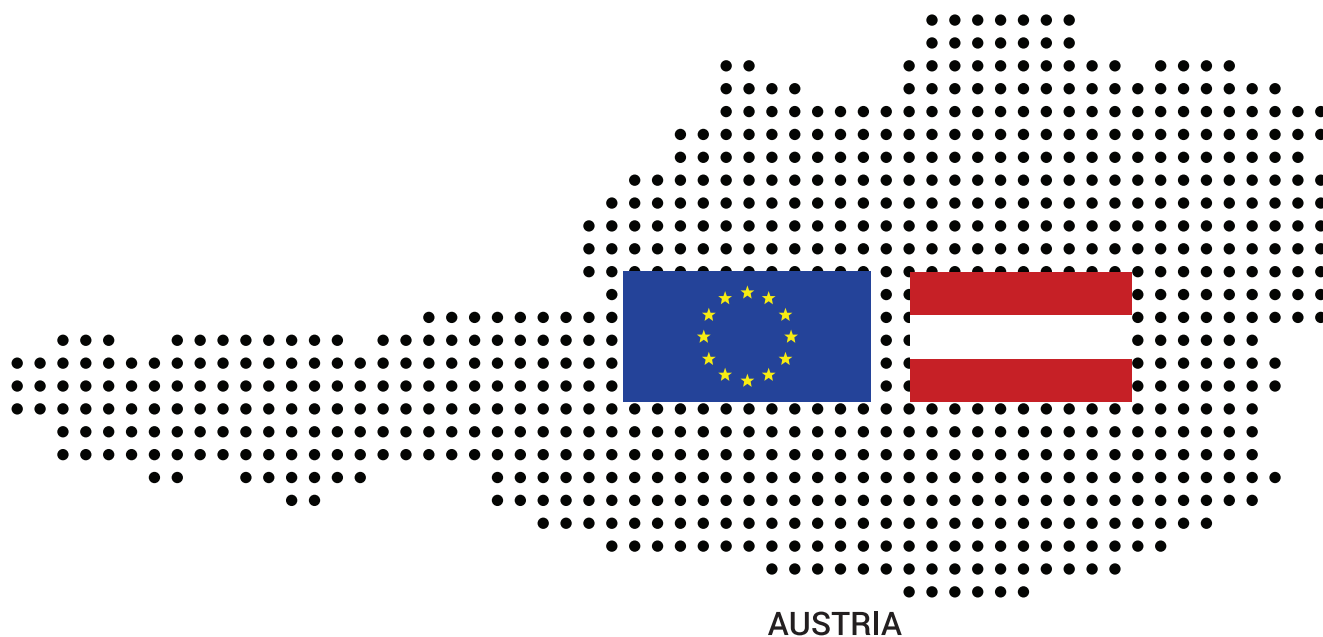


09-Pole & Bollrad Lights
14 Pages

POLE AND BOLLARD LIGHTS

09





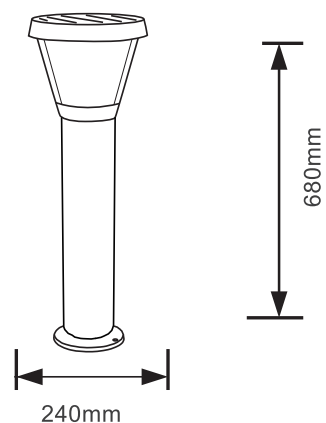

describe



Solar panel	4.5W/5V
Li-ion Battery	3.2V 7AH
CCT	3000/6500K
CRI	≥ 90
LED Type	2835
Material	Aluminum+PC
O.B MES	520*520*730mm
Warranty	2year
Life Span	25000H
Working mode	Optical control

design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection




Model NO.	CharingTime	Working Time	Body Size
DU-CT4208R	4-6Hrs	>12Hrs	Φ240*H680mm

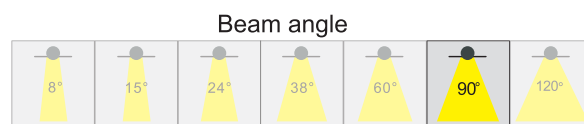

Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

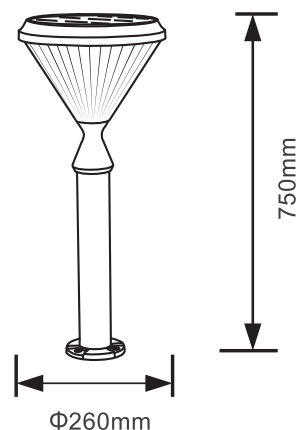

describe



Solar panel	4.2W/5V
Li-ion Battery	3.2V 8AH
CCT	3000/6500K
CRI	≥ 90
LED Type	2835
Material	Aluminum+PC
O.B MES	570*570*460mm
Warranty	2year
Life Span	25000H
Working mode	Optical control

design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Model NO.	CharingTime	Working Time	Body Size
DU-CT4108R	4-6Hrs	>12Hrs	Φ260*H750mm

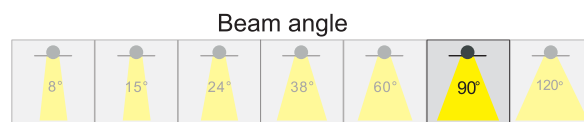


Optional Integrated Dimmable Driver / 1-10V DMX/DALI/TRIAC
LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



DU-CT4408R

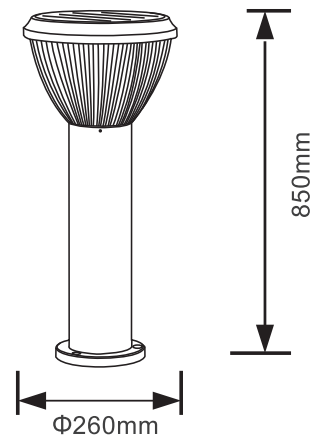

describe



Solar panel	4. 2W/5V
Li-ion Battery	3.2V 8AH
CCT	3000/6500K
CRI	≥ 90
LED Type	2835
Material	Aluminum+PC
O.B MES	570*570*930mm
Warranty	2year
Life Span	25000H
Working mode	Optical control

design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Model NO.	CharingTime	Working Time	Body Size
DU-CT4408R	4-6Hrs	>12Hrs	Φ260*H850mm

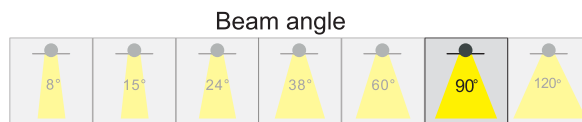

Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS
CUP LM 110
SYS LM 90
RoHS
CE
TRIDONIC



LED Chips - PHILIPS CITIZEN
BRIDGELUX. CREE SHARP SAMSUNG




describe

Solar panel	4.5W/5V
Li-ion Battery	3.2V 6AH
CCT	3000/6500K
CRI	≥ 90
LED Type	2835
Material	Aluminum+PC
O.B MES	/
Warranty	2year
Life Span	25000H
Working mode	Optical control

Model NO.	Solar panel	Li-ion Battery	Body Size
DU-CT4308R	4.5W/5V	3.2V 7AH	Φ200*H1600mm
DU-CT4308R-2	9W/5V	3.2V 14AH	800*H1600mm
DU-CT4308R-3	13.5W/5V	3.2V 21AH	800*H1600mm

design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Beam angle




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



DU-CT4008R

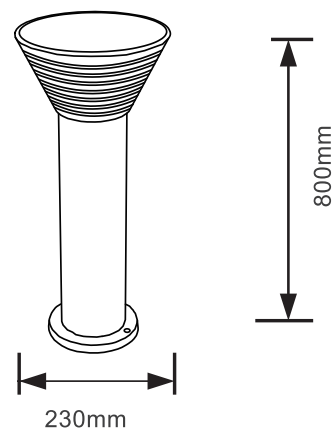

describe



Solar panel	4.5W/5V
Li-ion Battery	3.2V 6AH
CCT	3000/6500K
CRI	≥ 90
LED Type	2835
Material	Aluminum+PC
O.B MES	500*500*860mm
Warranty	2year
Life Span	25000H
Working mode	Optical control

design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Model NO.	CharingTime	Working Time	Body Size
DU-CT4008R	4-6Hrs	>12Hrs	Φ230*H800mm

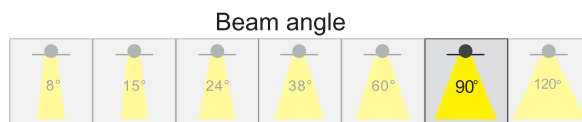


Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC
LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



DU-CT3908S

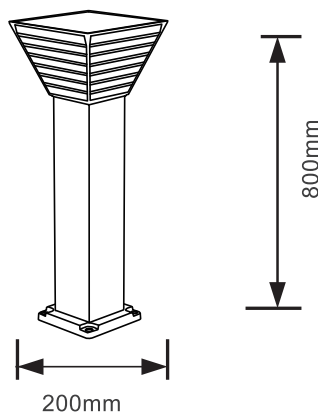

describe


Solar panel	5W/5V
Li-ion Battery	3.2V 6AH
CCT	3000/6500K
CRI	≥ 90
LED Type	2835
Material	Aluminum+PC
O.B MES	440*440*860mm
Warranty	2year
Life Span	25000H
Working mode	Optical control

design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Model NO.	CharingTime	Working Time	Body Size
DU-CT3908S	4-6Hrs	>12Hrs	200*200*H800mm

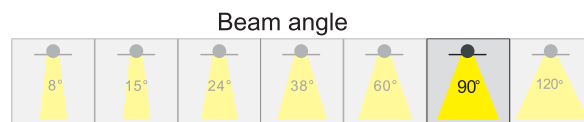

Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC
LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**
Manufacturing your choice



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



Model No: DU-WL15708R-B	Surface Treatment: BK/WH/GY/AB
Power: 8W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Acrylic
Luminous Flux: 550Lm	Working Temperature: -10~50° C
CRI: ≥70	IP: 65
Color Temperature: 6500/4000/3000K	Body Size: 150*90*140mm




Model No: DU-WL15708R-2B	Surface Treatment: BK/WH/GY/AB
Power: 2*8W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Acrylic
Luminous Flux: 1100Lm	Working Temperature: -10~50° C
CRI: ≥70	IP: 65
Color Temperature: 6500/4000/3000K	Body Size: 150*90*200mm



Model No: DU-WL18500C-A	Surface Treatment: BK/WH/BKG
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220-240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: 200*170*108mm



Model No: DU-WL18500C-2A	Surface Treatment: BK/WH/BKG
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220-240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: 300*170*108mm

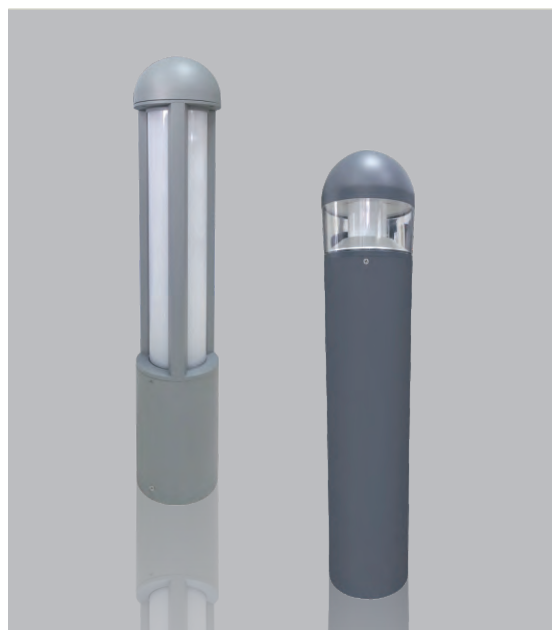


Model No: DU-C1512C	Surface Treatment: GY
Power: SMD 12W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 800Lm	Working Temperature: -10~50° C
CRI: ≥80	IP: 65
Color Temperature: 6500/4000/3000K/RGB	Body Size: Φ145*800mm



Model No: DU-C1408C-A	Surface Treatment: GY
Power: SMD 8W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Acrylic
Luminous Flux: 370Lm	Working Temperature: -10~50° C
CRI: ≥80	IP: 65
Color Temperature: 6500/4000/3000K/RGB	Body Size: Φ165*800mm




Beam angle





DU-WLT21108R



describe



Solar panel	4.2W/5V
Li-ion Battery	3.2V 8AH
CCT	3000/6500K
CRI	≥ 90
LED Type	2835
Material	Aluminum+PC
O.B MES	570*570*930mm
Warranty	2year
Life Span	25000H
Working mode	Optical control

design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Model NO.	CharingTime	Working Time	Body Size
DU-WLT21108R	4-6Hrs	>12Hrs	Φ260*H250mm

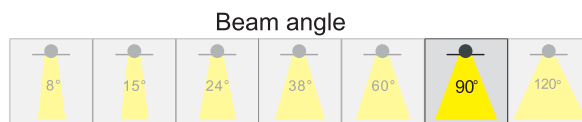

Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
LED Drivers - PHILIPS CUI
MWM TCI TRIDONIC



LED Chips - PHILIPS CITIZEN
BRIDGELUX. CREE SHARP SAMSUNG



Model No: DU-WL15800R	Surface Treatment: BK/WH/GY/AB
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220~240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: 220*95*240mm



Model No: DU-WL15800R-2	Surface Treatment: BK/WH/GY/AB
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220~240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: 220*95*390mm



Model No: DU-C2300R-A	Surface Treatment: BK/WH/GY/AB
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220~240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: Φ155*300mm



Model No: DU-C2300R-B	Surface Treatment: BK/WH/GY/AB
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220~240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: Φ155*1000mm



Model No: DU-WL15708R-A	Surface Treatment: BK/WH/GY/AB
Power: 8W	Life Span: 25000H
Input Voltage: AC220~240V 50/60Hz	Material: Alum+Acrylic
Luminous Flux: 550Lm	Working Temperature: -10~50° C
CRt: ≥70	IP: 65
Color Temperature: 6500/4000/3000K	Body Size: 150*90*140mm



Model No: DU-WL15708R-2A	Surface Treatment: BK/WH/GY/AB
Power: 2*8W	Life Span: 25000H
Input Voltage: AC220~240V 50/60Hz	Material: Alum+Acrylic
Luminous Flux: 1100Lm	Working Temperature: -10~50° C
CRt: ≥70	IP: 65
Color Temperature: 6500/4000/3000K	Body Size: 150*90*200mm




Model No: DU-C2208R-A	Surface Treatment: BK/WH/GY/AB
Power: SMD 8W	Life Span: 25000H
Input Voltage: AC220~240V 50/60Hz	Material: Alum+Acrylic
Luminous Flux: 550Lm	Working Temperature: -10~50° C
CRt: ≥70	IP: 65
Color Temperature: 6500/4000/3000K/RGB.	Body Size: Φ135*300mm



Model No: DU-C2208R-B	Surface Treatment: BK/WH/GY/AB
Power: SMD 8W	Life Span: 25000H
Input Voltage: AC220~240V 50/60Hz	Material: Alum+Acrylic
Luminous Flux: 550Lm	Working Temperature: -10~50° C
CRt: ≥70	IP: 65
Color Temperature: 6500/4000/3000K/RGB.	Body Size: Φ135*1000mm

Beam angle





Model No: DU-WL19800C-1	Surface Treatment: BK/WH
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220-240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: 195*165*98mm



Model No: DU-WL19800C-2	Surface Treatment: BK/WH
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220-240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: 300*165*98mm



Model No: DU-C3700C	Surface Treatment: BK/WH
Power: Suitable all of E27 Lamp holder	Working Temperature: -10~50° C
Input Voltage: AC220-240V 50/60Hz	IP: 65
Material: Alum+Glass+Iron	Body Size: 150*280mm



Model No: DU-WL19306L	Surface Treatment: Brown
Power: SMD 6W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 30Lm/W	Working Temperature: -10~50° C
CRt: ≥80	IP: 65
Beam Angle: 120°	Body Size: 275*105*350mm
Color Temperature: 6500/4000/3000K	Hole Size: /



Model No: DU-C3506L	Surface Treatment: Brown
Power: SMD 6W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 30Lm/W	Working Temperature: -10~50° C
CRt: ≥80	IP: 65
Beam Angle: 120°	Body Size: 275*140*350mm
Color Temperature: 6500/4000/3000K	Hole Size: /




Model No: DU-C3506L-A	Surface Treatment: Brown
Power: SMD 6W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 30Lm/W	Working Temperature: -10~50° C
CRt: ≥80	IP: 65
Beam Angle: 120°	Body Size: 275*140*850mm
Color Temperature: 6500/4000/3000K	Hole Size: /



Model No: DU-C3606L-3	Surface Treatment: Brown
Power: SMD 3*6W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 30Lm/W	Working Temperature: -10~50° C
CRt: ≥80	IP: 65
Beam Angle: 120°	Body Size: 275*240*2400mm
Color Temperature: 6500/4000/3000K	Hole Size: /




Beam angle



Tree light



DU-T612-W

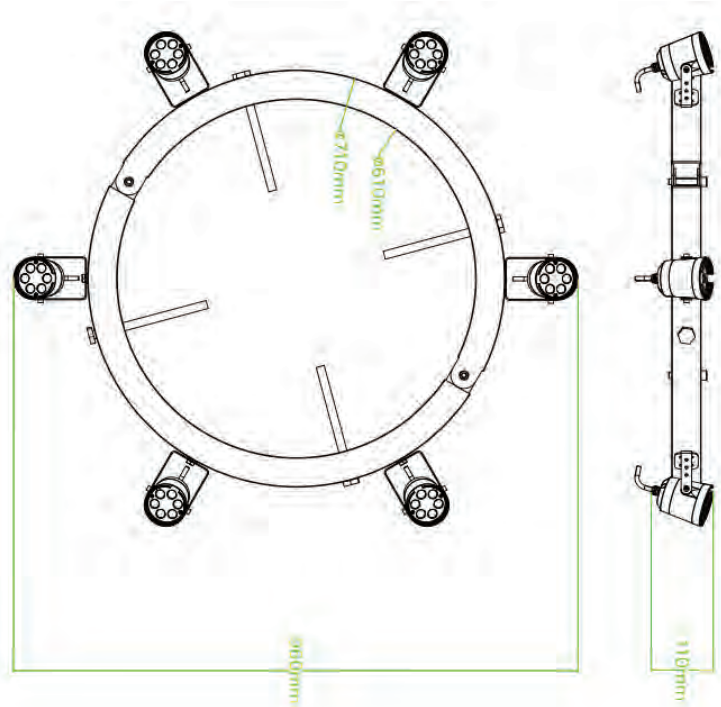

Specification

Electrical Parameters

Rated Power(W):12Wx6PCS; 18Wx 6PCS

Working Voltage :DC24V; AC220V; 50Hz-60Hz

Power Factor:>~0.9

Electrical Safety Class: I

Optical Parameters Color Temperature :2700K-6500K/AMBER/R/G/B/RGB/RGBW/RGBA

Light Source Brand:CREE

Light Source:XPE

Led Quantity:4PCS; 6PCS


Light Source Lifespan:>50000 Hours

Beam Angle:10 / 30 / 45 / 60 Degree

Cover Material:Aluminum Die-casting body with powder coated surface



Beam angle







PRODUCT 2020 CATALOGUE

Sonnleithnergasse 2/4/44Wien 1100
Österreich
Vienna - Austril

Contact us:
T: +43 676 449 0575
E: info@deluxlight.eu