


DELLUX LIGHTING



**Manufactured in Austria
and China with *TRIDONIC Technology***



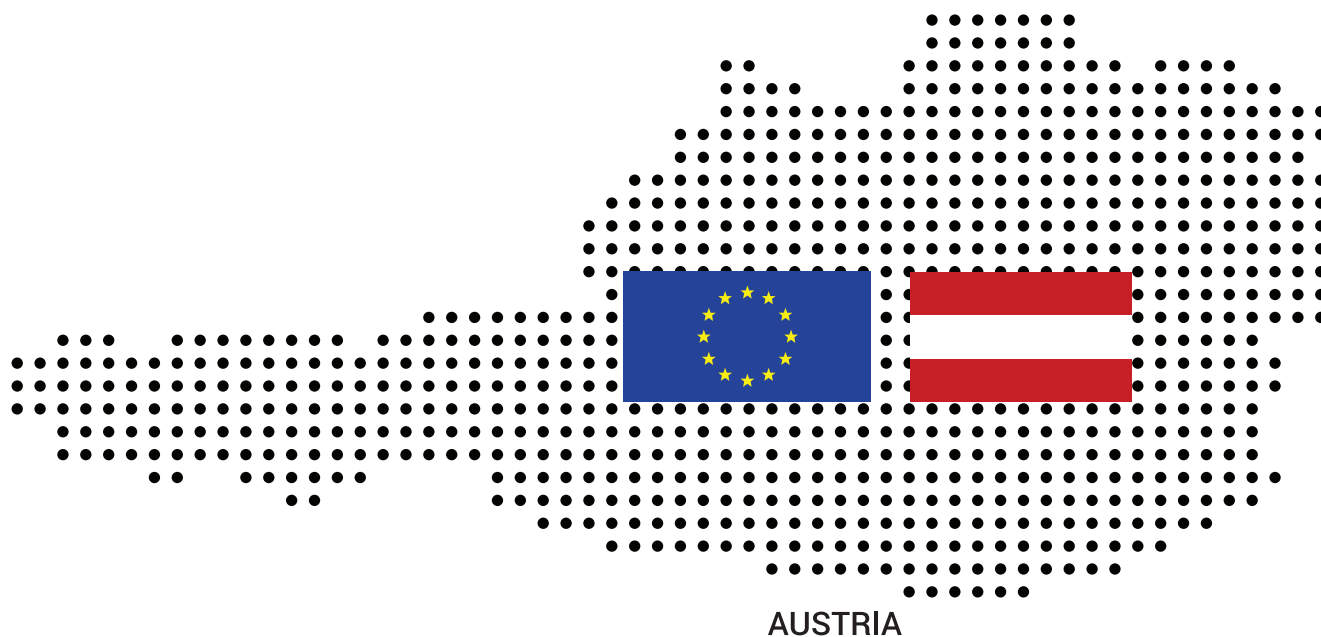

01-Spot Lights
44 Page

SPOT LIGHTS



01



BEYOND SERIES

68-MODULE



DU-S681



DU-S682



DU-S683



DU-S687



DU-S688



DU-S689



DU-S681



15°/24°/36°/60°

6W/9W

Ø 46*H55mm



DU-6810R



Ø 65*40mm
Hole Size Ø55mm

DU-6811R



Ø 65*36mm
Hole Size Ø55mm

DU-6812R



Ø 65*36mm
Hole Size Ø55mm

DU-6816R



Ø 59.5*27mm
Hole Size Ø60mm



Reflector color changable



Titanium Bright silver Golden

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC

LED Drivers - PHILIPS **GTI**
WUW **WTCI TRIDONIC**



LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE SHARP SAMSUNG

DU-S682



15°/24°/38°
6W/9W
Ø58*H49mm

DU-S683



15°/24°/38°
12W/15W
Ø 58*H72mm



DU-6820R



Ø 85*54mm
Hole Size Ø75mm

DU-6830R



Ø 85*54mm
Hole Size Ø75mm

DU-6860R



Ø 105*60mm
Hole Size Ø90mm

DU-6821R



Ø 85*54mm
Hole Size Ø75mm

DU-6831R




Ø 85*54mm
Hole Size Ø75mm

DU-6861R



Ø 105*60mm
Hole Size Ø90mm

DU-6822S



Ø 85*85*58mm
Hole Size 75*75mm

DU-6832S



Ø 72*72*58mm
Hole Size 75*75mm

DU-6824R



Ø 85*55mm
Hole Size Ø75mm

DU-6825R



Ø 110*52mm
Hole Size Ø100mm

DU-6826R



Ø 74.5*33mm
Hole Size Ø77mm

DU-6866R



Ø 89.5*33mm
Hole Size Ø92mm

DU-6829R



Ø 85*47mm
Hole Size Ø75mm

DU-6827R



Ø 74.5*33mm
Hole Size Ø77mm

DU-6867R




Ø 89.5*33mm
Hole Size Ø92mm

Reflector color changable




Titanium Bright silver Golden

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DIMX/DAU/TRIAC

LED Drivers - PHILIPS GTI



LED Chips - PHILIPS CITIZEN



DU-S687



15°/24°/38°

18W/24W

Ø 77*H88mm



DU-6870R



Ø115*66mm
Hole Size Ø100mm

DU-6871R



Ø115*66mm
Hole Size Ø100mm

DU-6872R



Ø112*112*74mm
Hole Size 100*100mm

DU-6874R



Ø 110*65mm
Hole Size Ø100mm

DU-6875R



Ø 135*63mm
Hole Size Ø120mm

DU-6876R



Ø 99.5*33mm
Hole Size Ø102mm

DU-6877R




Ø 99.5*33mm
Hole Size Ø102mm

Reflector color changable




Titanium Bright silver Golden

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DIMX/DAU/TRIAC

LED Drivers - PHILIPS **GTI**
BRIDGELUX, CREE, SHARP, SAMSUNG



LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE, SHARP, SAMSUNG

DU-S688



15°/24°/38°
28W/33W
Ø 87*H105mm



DU-6880R




Ø 140*78mm
Hole Size Ø125mm

DU-6881R



Ø 140*78mm
Hole Size Ø125mm

DU-6882S



Ø 140*140*84mm
Hole Size 125*125mm

DU-6884R



Ø 138*87mm
Hole Size Ø125mm

DU-6885R



Ø 145*75mm
Hole Size Ø130mm

DU-6886R



Ø 119.7*33mm
Hole Size Ø122mm

DU-6887R



Ø 119.7*33mm
Hole Size Ø122mm

Reflector color changable




Titanium Bright silver Golden

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DIMX/DAU/TRIAC

LED Drivers - PHILIPS **GTI**
BRIDGELUX, CREE, SHARP, SAMSUNG



LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE, SHARP, SAMSUNG

DU-S689



15°/24°/38°

38W/42W

Ø 102*H116mm

DU-6890R



Ø165*86mm
Hole Size Ø150mm

DU-6891R



Ø165*86mm
Hole Size Ø150mm

DU-6892S



Ø165*165*91mm
Hole Size 150*150mm

DU-6894R



Ø 165*104mm
Hole Size Ø150mm

DU-6896R



Ø 145*33mm
Hole Size Ø147mm

DU-6897R




Ø 145*33mm
Hole Size Ø147mm

Reflector color changable




Titanium Bright silver Golden

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DIMX/DAU/TRIAC

LED Drivers - PHILIPS **GTI**



LED Chips - PHILIPS CITIZEN
 BRIDGELUX, CREE SHARP SAMSUNG


68-MODULE

Power	6W/9W
Beam Angle	15°/24°/36°/60°
Size (mm)	Ø 46*H55mm

DU-S681



Beam angle




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC


LED Drivers - PHILIPS **GTI**
GTI TRIDONIC
powerful light solutions Empowering your ideas




LED Chips - PHILIPS **CITIZEN**
High Performance LED
 BRIDGELUX, CREE **SHARP** SAMSUNG




DU-6810R



DU-6811R



DU-6812R



DU-6816R





describe

- ① **material** : die-cast aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: clothing store, supermarket
- ⑦ **Surface treatment**: white

design philosophy

Integrated die-casting radiator, Dalco professional optical lens, lamp head can be rotated and retracted to meet the needs of more lighting angles, use scenarios: clothing stores, supermarket


Model NO.	Power	Voltage	Luminous	Body Size
DU-6810R	15W	AC220-240V	≥2000lm	Φ65*83mm
DU-6811R	6W/9W	AC220-240V	≥2000lm	Φ65*80mm
DU-6812R	15W	AC220-240V	≥2000lm	Φ65*80mm
DU-6816R	6W/9W	AC220-240V	≥2000lm	Φ85*82mm




Reflector color changeable



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC



68-MODULE



Power 6W/9W
Beam Angle 15°/24°/38°
Size (mm) Ø 58*H49mm


DU-S682

Power 12W/15W
Beam Angle 15°/24°/38°
Size (mm) Ø 58*H72mm

DU-S683




- Cast aluminum material
- Good heat dissipation
- Professional anti-glare design

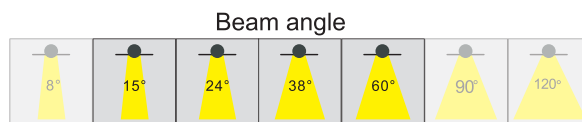


Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC


LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**




LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE SHARP SAMSUNG




DU-6820R



DU-6830R



DU-6860R



DU-6821R

describe


- ① **material** : die-cast aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: clothing store, supermarket
- ⑦ **Surface treatment**: white

design philosophy

Integrated die-casting radiator, Dalco professional optical lens, lamp head can be rotated and retracted to meet the needs of more lighting angles, use scenarios: clothing stores, supermarket


Model NO.	Power	Voltage	Luminous	Body Size
DU-6820R	15W	AC220-240V	≥2000lm	Φ85*90mm
DU-6830R	15W	AC220-240V	≥2000lm	Φ85*112mm
DU-6860R	15W	AC220-240V	≥2000lm	Φ97*105mm
DU-6821R	15W	AC220-240V	≥2000lm	Φ85*90mm

3000K




Luminous flux
2187lm

3000K




Luminous flux
2196lm

3000K



Luminous flux
2230lm




Reflector color changeable




Titanium Bright silver Golden

Beam angle




Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC

LED Drivers - PHILIPS GTI




LED Chips - PHILIPS CITIZEN








DU-6831R



DU-6861R



DU-6822R



DU-6832S

describe


- ① **material** : die-cast aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: clothing store, supermarket
- ⑦ **Surface treatment**: white

design philosophy

Integrated die-casting radiator, Dalco professional optical lens, lamp head can be rotated and retracted to meet the needs of more lighting angles, use scenarios: clothing stores, supermarket


Model NO.	Power	Voltage	Luminous	Body Size
DU-6831R	15W	AC220-240V	≥2000lm	Φ85*90mm
DU-6861R	15W	AC220-240V	≥2000lm	Φ97*105mm
DU-6822S	15W	AC220-240V	≥2000lm	Φ85*85*93
DU-6832S	15W	AC220-240V	≥2000lm	Φ129*72*93

3000K




Luminous flux
2187lm

3000K




Luminous flux
2196lm

3000K




Luminous flux
2230lm




Reflector color changable



Beam angle




Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC




LED Chips - PHILIPS CITIZEN







DU-6824R



DU-6825R



DU-6826R



DU-6866R

describe


- ① **material** : die-cast aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: clothing store, supermarket
- ⑦ **Surface treatment**: white

design philosophy

Integrated die-casting radiator, Dalco professional optical lens, lamp head can be rotated and retracted to meet the needs of more lighting angles, use scenarios: clothing stores, supermarket


Model NO.	Power	Voltage	Luminous	Body Size
DU-6824R	15W	AC220-240V	≥2000lm	Φ85*90mm
DU-6825R	15W	AC220-240V	≥2000lm	Φ110*87
DU-6826R	15W	AC220-240V	≥2000lm	Φ99*90
DU-6866R	15W	AC220-240V	≥2000lm	Φ115*95

3000K




Luminous flux
2187lm

3000K




Luminous flux
2196lm

3000K




Luminous flux
2230lm




Reflector color changable



Beam angle




Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC




LED Chips - PHILIPS CITIZEN







DU-6829R-1



DU-6829R-2



DU-6827R



DU-6867R

describe


- ① **material** : die-cast aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: clothing store, supermarket
- ⑦ **Surface treatment**: white

design philosophy

Integrated die-casting radiator, Dalco professional optical lens, lamp head can be rotated and retracted to meet the needs of more lighting angles, use scenarios: clothing stores, supermarket


Model NO.	Power	Voltage	Luminous	Body Size
DU-6829R-1	15W	AC220-240V	≥2000lm	Φ85*73
DU-6829R-2	15W	AC220-240V	≥2000lm	Φ85*82
DU-6827R	15W	AC220-240V	≥2000lm	Φ99*99
DU-6867R	15W	AC220-240V	≥2000lm	Φ115*95

3000K




Luminous flux
2187lm

3000K




Luminous flux
2196lm

3000K



Luminous flux
2230lm




Reflector color changable



Titanium Bright silver Golden

Beam angle




Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC

LED Drivers - PHILIPS GTI




LED Chips - PHILIPS CITIZEN


BRIDGELUX, CREE, SHARP, SAMSUNG




DU-6890R



DU-6891R



DU-6894R



DU-6892S

describe


- ① **material** : die-cast aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: clothing store, supermarket
- ⑦ **Surface treatment**: white

design philosophy

Integrated die-casting radiator, Dalco professional optical lens, lamp head can be rotated and retracted to meet the needs of more lighting angles, use scenarios: clothing stores, supermarket


Model NO.	Power	Voltage	Luminous	Body Size
DU-6890R	15W	AC220-240V	≥2000lm	Φ165*182
DU-6891R	6W/9W	AC220-240V	≥2000lm	Φ165*182
DU-6894R	6W/9W	AC220-240V	≥2000lm	Φ165*199
DU-6892S	15W	AC220-240V	≥2000lm	Φ165*165*186

3000K




Luminous flux
2187lm

3000K




Luminous flux
2196lm

3000K




Luminous flux
2230lm



Reflector color changeable




Beam angle






Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC

LED Drivers - PHILIPS **GTI**
BRIDGELUX, CREE, SHARP, SAMSUNG



LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE, SHARP, SAMSUNG



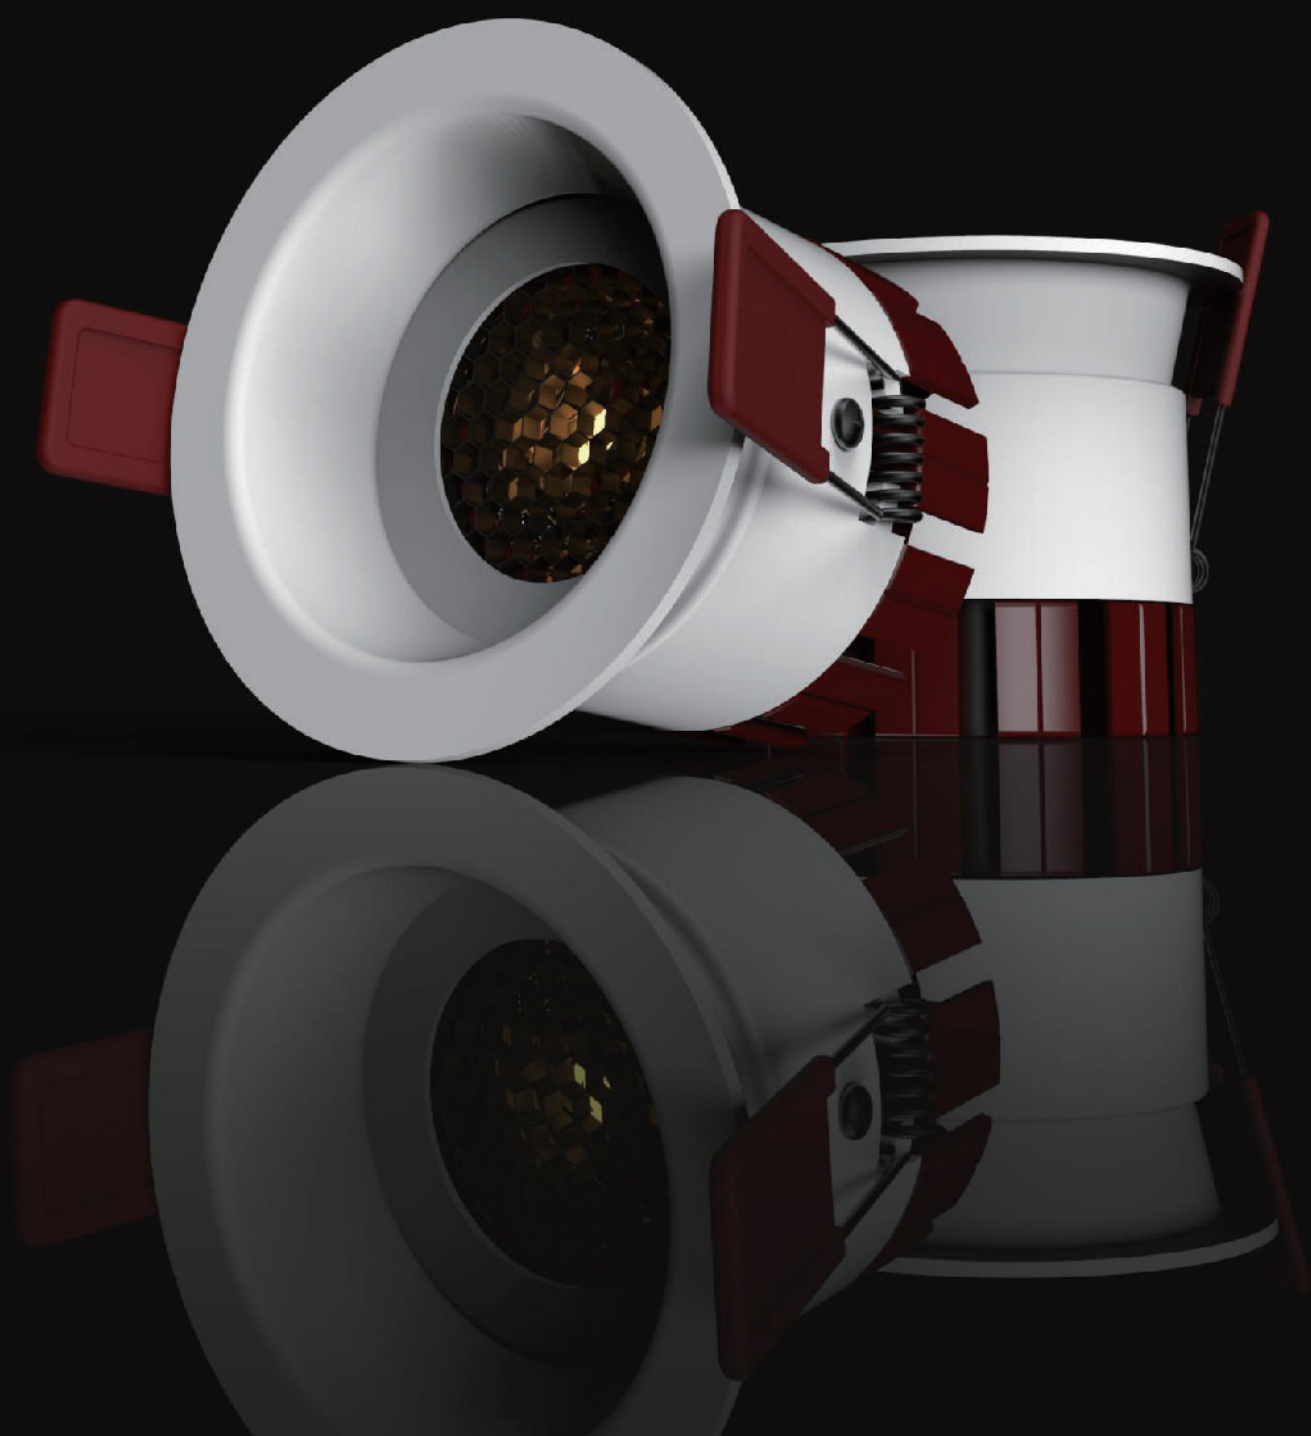




Product parameters

Model	Power	Size (DxH)	Cut hole	Lighting direction
DUR-R72 06	6W	Ø72*64mm	Ø60-67mm	Fixed



Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<19





Product parameters

Model	Power	Size (DxH)	Cut hole	Lighting direction
DUR-R88 12	12W	Ø88*69mm	Ø75-83mm	Fixed

Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<19







Product parameters

Model	Power	Size (DxH)	Cut hole	Lighting direction
DUF-R82 12	12W	Ø82*40mm	Ø75mm	Fixed



Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<19



Product parameters


Model	Power	Size (DxH)	Cut hole	Lighting direction
DUF-R102 20	20W	Ø102*46mm	Ø95mm	Fixed

Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<19

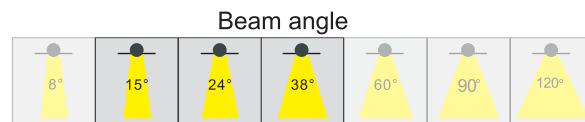

Optional Integrated Dimmable Driver / 1-10V/DIM+/DALI/TRIAC

LED Drivers - PHILIPS **GTI**
ATCI TRIDONIC




LED Chips - PHILIPS CITIZEN
 BRIDGELUX, CREE SHARP SAMSUNG



Model No: DU-CLQ0207R	Surface Treatment: WH
Power: COB 7W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 680Lm	Working Temperature: -10~45° C
CRI: ≥85	IP: 20
Beam Angle: 38°	Body Size: Φ90*55mm
Color Temperature: 6500/4000/3000K	Hole Size: Φ75mm




DU-CLQ0207R

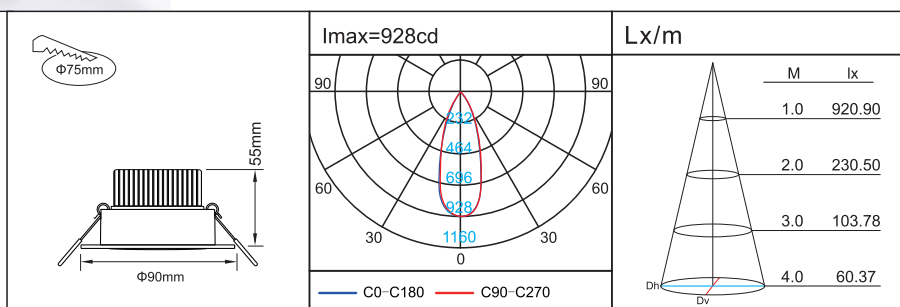

Products list


Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
DU-CLQ0207R	COB 7W	680Lm	38°	WH	Φ90x55mm	Φ75mm
DU-CLQ0212R	COB 12W	1100Lm	60°	WH	Φ109x63mm	Φ95mm
DU-CLQ0220R	COB 20W	1900Lm	38°	WH	Φ140x71mm	Φ125mm



Model No: DU-P3412R	Surface Treatment: WH
Power: COB 12W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1100Lm	Working Temperature: -10~45° C
CRI: ≥85	IP: 20
Beam Angle: 18°	Body Size: Φ73*145mm
Color Temperature: 6500/4000/3000K	Hole Size: /




DU-P3412R

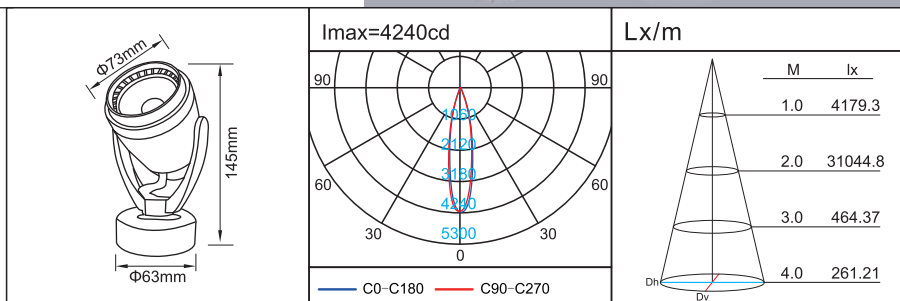

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size
DU-P3412R	COB 12W	1100Lm	18°	WH	Φ73x145mm
DU-P3430R	COB 30W	2400Lm	18°	WH	Φ105x205mm



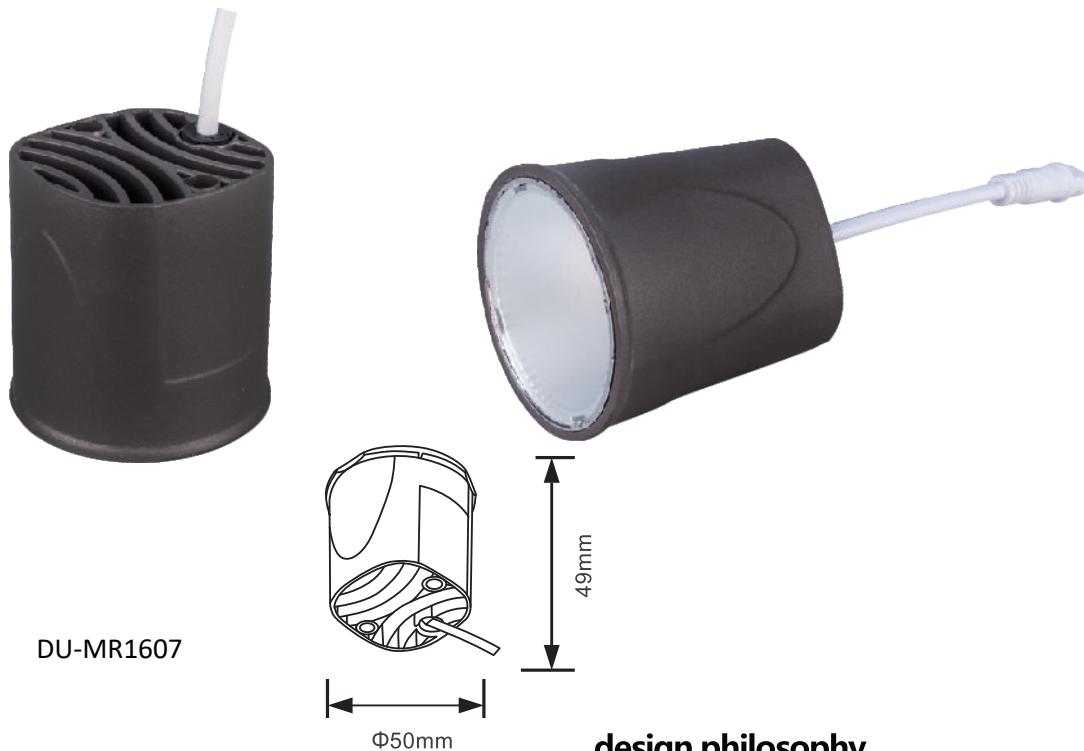

describe

- ① **Material:** aluminum 、 plastic, die-cast aluminum back cover
- ② **Optical lens:**
- ③ **reflector:**
- ④ **Light source (chip + package / brand + type):** COB / 2 p 7 s
- ⑤ **Drive:** external isolated constant current drive
- ⑥ **Applicable working environment:** restaurants

·living rooms, bedrooms, aisles, hotels, Malls

Input: AC100-240V, 50/60Hz

Lamp Type: Direct LED Lamp

Life time: 30000H

Switching Cycles: 15000 Times

Ra ≥90


Ta: 45°C

Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-MR1607	7W	24°	500Lm	Φ50x49mm

design philosophy

Main use: replace the traditional lamp cup,same size as MR16.


This one uses a large chip, high lumen lamp beads, high brightness and good luminous effect. Die-cast Aluminum back cover for efficient heat dissipation ,durability. The new upgrade greatly improves the life of the product, and perfectly avoids the traditional durability of traditional lamp cups.



Beam angle




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS
LED Drivers - TCI TRIDONIC



LED Chips - PHILIPS CITIZEN
BRIDGELUX. CREE SHARP SAMSUNG



DU-CLQ9906R



describe



- ① **Material:** aluminum
- ② **Optical lens:** PC lens
- ④ **Light source (chip + package / brand + type):** COB
- ⑤ **Drive:** Isolated constant current
- ⑥ **Applicable working environment:** bathroom
- ⑦ **Surface treatment:** white + gray

Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥90
Ta: 45°C
LED Type: COB


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size	Hole Size
DU-CLQ9906R	6W	24°	470Lm	Φ83x82mm	Φ75mm

design philosophy

Die-cast aluminum lamp body, efficient heat dissipation, sturdy and durable, the lens emits light, the light is even and soft. IP44 protection level, specially designed for bathroom.

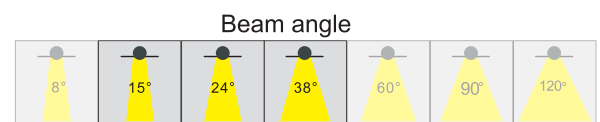

Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
 LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

LED Ceiling light series, fashionable and stylish, well-structured made of aluminum alloy, with high-tech surface spraying treatment, grand and elegant, humanistic design of installation structure for easy and safe operation, high quality ROSY electronic ballast make it more energy efficient and longer service life.

High quality aluminum radiators
Thicker fins to increase the contact area of die-cast integration, faster and faster than traditional radiator heat conduction 20%.




Quality of light
Taiwan famous LED chips, super thick double gold, shining more stable, long life, light color of pristine.




High light transmission of integrated optical lens
Light transmittance more than 92%, ensure uniform light effect light color purity.




Precision aluminium sides
Seiko quality aluminum sides used after Anodic oxidation processing will never fade, highlight with two Flat White process highlights the distinctive taste makes the spotlight looks more beautiful.



Beam angle



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
LED Drivers - PHILIPS
GTI
WU TCI TRIDONIC



LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE SHARP SAMSUNG

Stand single fitting





Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU858Y	8W	WH	3000K / 4000K / 6000K	Φ 80	Φ 95




Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU858F	8W	WH	3000K / 4000K / 6000K	Φ 80	95x95



LED ceiling lights have excellent thermal management ability; High light output, no glare and shadow, light, soft and comfortable; High color rendering index, color reproduction is good; Impact resistance, vibration resistance, good safety; Easy installation, can directly replace the traditional lighting;



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**





LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**




Product Features

- 1.The lamp body using aluminum alloy die-casting molding
- 2.Surface spraying anti-corrosion technology of electrostatic spraying processing,Specular surface,no exposed,pinhole phenomenon,
- 3.The power line using high-grade fire retardant wire;
- 4.Stainless steel spring, can be fitted with different thicknesses of the ceiling;
- 5.Special frame design,perfectly integrated with the ceiling.
- 6.Built in high power LED light source,built-in electronic ballast;adjustable.




Distance Min.




Ceiling Thickness

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
ATCI TRIDONIC



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

Stand single fitting



Item no	Power	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU899-LX421C 3W	3W	3000K-7000K	Φ 35	Φ 40




Item no	Power	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU899-LX421C 1W	1W	3000K-7000K	Φ 25	Φ 30




Item no	Power	Color Temperature	Material	Input
DU899-LX421C 3WS	3W	3000K-7000K	AL	AC-85-265V/50-60Hz



Item no	Power	Color Temperature	Material	Input
DU899-LX421C 1WS	1W	3000K-7000K	AL	AC-85-265V/50-60Hz



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **GTI** **TRIDONIC**
Empowering your ideas



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**





Description

The LED down light is made of novel environment friendly Aluminum with CNC technology. The surface handled by anodic oxidation, keeping beautiful and durable never rust. The personalized appearance fully reflects the popular trend of post-modern residence and business design.


LED down light can be adjusted according to different applications, lighting design combining Aluminum make the non-glare light and high light efficiency combining the characteristics of optical technology and classic subtle structural design, creating elegant, sophisticated, romantic household and commercial space lighting.

Technical Parameter

Item no	Power	Color Temperature	Input	Hole Size(mm)	Lamp Size(mm)
DUKN-601-7	7W	3000K/4000K/6000	AC110-265V	Φ75	Φ90
DUKN-601-12	12W	3000K/4000K/6000	AC110-265V	Φ95	Φ108
DUKN-601-20	20W	3000K/4000K/6000	AC110-265V	Φ120	Φ138
DUKN-601-30	30W	3000K/4000K/6000	AC110-265V	Φ140	Φ160



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
LED Drivers - PHILIPS
LED Drivers - **GTI**
LED Drivers - **ATCI** **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



Stand single fitting



Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU818	8W	WH	3000K / 4000K / 6000K	Φ 75	Φ 90



Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU878	8W	WH	3000K / 4000K / 6000K	Φ 80	Φ 95



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**







LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



Product Features

- 1.The lamp body using aluminum alloy die-casting molding
- 2.Surface spraying anti-corrosion technology of electrostatic spraying processing,Specular surface,no exposed,pinhole phenomenon,
- 3.The power line using high-grade fire retardant wire;
- 4.Stainless steel spring, can be fitted with different thicknesses of the ceiling;
- 5.Special frame design,perfectly integrated with the ceiling.
- 6.Built in high power LED light source,built-in electronic ballast;adjustable.




Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**




Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-95	9W	WH	3000K / 4000K / 6000K	Φ 80	Φ 95




Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-95	9W	GD	3000K / 4000K / 6000K	Φ 80	Φ 95



Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-95	9W	SL	3000K / 4000K / 6000K	Φ 80	Φ 95




Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-115	15W	WH	3000K / 4000K / 6000K	Φ 95	Φ 115



Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-115	15W	GD	3000K / 4000K / 6000K	Φ 95	Φ 115




Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-115	15W	SL	3000K / 4000K / 6000K	Φ 95	Φ 115



Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-145	25W	WH	3000K / 4000K / 6000K	Φ 125	Φ 145




Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-145	25W	GD	3000K / 4000K / 6000K	Φ 125	Φ 145




Item no	Power	Color	Color Temperature	Hole Size(mm)	Lamp Size(mm)
DU90I-145	25W	SL	3000K / 4000K / 6000K	Φ 125	Φ 145



Beam angle



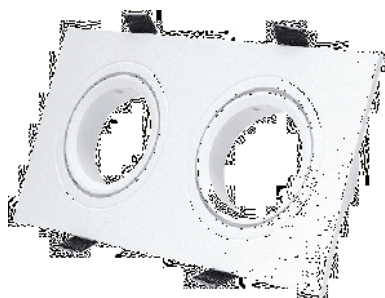

DU-CLQ108S-2



DU-CLQ108S-3

describe

- ① **Shell material and technology:** PC
- ② **Applicable working environment:** hotel, aisle, home
- ③ **Surface treatment:** white / black

design philosophy

Imported PC material, flame retardant and temperature resistant, no yellowing, good color consistency, suitable for MR16 lamp cup, module, flexible and versatile.

Model NO.	Body Size	Hole Size
DU-CLQ108S-2	173x93x25mm	78~165mm
DU-CLQ108S-3	253x93x25mm	80~240mm
DU-CLQ109S-A	93x93x53mm	85x85mm
DU-CLQ109S-B	93x93x70mm	85x85mm
DU-CLQ110S-A	96x96x100mm	Surface Mounted
DU-CLQ110S-B	96x96x100mm	Surface Mounted

Model NO.	Body Size	Hole Size
DU-CLM110S-C	96x96x100mm	Surface Mounted
DU-CLQ109R-A	Φ93x53mm	Φ85mm
DU-CLQ109R-B	Φ93x36mm	Φ85mm
DU-CLM110R-A	Φ96x100mm	Surface Mounted
DU-CLM110R-B	Φ96x100mm	Surface Mounted
DU-CLM110R-C	Φ96x100mm	Surface Mounted



DU-CLQ109S-A



DU-CLQ109S-B



DU-CLM110S-A



DU-CLQ110S-B



DU-CLM110S-C



DU-CLQ109R-A



DU-CLQ109R-B



DU-CLM110R-A



DU-CLM110R-B



DU-CLM110R-C



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
LED Drivers - **PHILIPS** **ETI**
MW **TCI** **TRIDONIC**
Sustainable lighting solutions

LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



DU-CLQ63R



DU-CLQ82R



DU-GLQ85R

describe

- ① **Shell material and technology:** Aluminum
- ② **Applicable working environment:** hotel, aisle, home
- ③ **Surface treatment:** white / black

design philosophy

Aluminum face ring for durability. The module size is standardized and unified, which can directly replace the MR16 \ GU5.3 / 10 light source, which is easy to install, flexible in application, and convenient to maintain

Model NO.	Body Size	Hole Size
DU-CLQ48R	Φ95mm	Φ90mm
DU-CLQ63R	Φ92x29mm	Φ80mm
DU-CLQ82R	Φ93x50mm	Φ85mm
DU-CLQ85R	Φ82mm	Φ75mm
DU-CLQ79R	Φ90x90mm	Φ80mm
DU-GLQ1000S-1	106x106x25mm	100x100mm
DU-GLQ1700S-1	110x110mm	95x95mm

Model NO.	Body Size	Hole Size
DU-GLQ1700S-2	200x110mm	192x103mm
DU-GLQ1800S-1	110x110x60mm	195x95mm
DU-GLQ1800S-2	210x115x60mm	190x95mm
DU-GLQ1600S-1	95x95x25mm	75mm
DU-GLQ1600S-2	175x95x25mm	115x75mm
DU-GLQ1600S-3	256x95x25mm	226x75mm



DU-CLQ48R



DU-CLQ79S



DU-GLQ1600S-1



DU-GLQ1600S-2



DU-GLQ1600S-3



DU-GLQ1000S-1




DU-GLQ1700S-1



DU-GLQ1700S-2




DU-GLQ1800S-1



DU-GLQ1800S-2



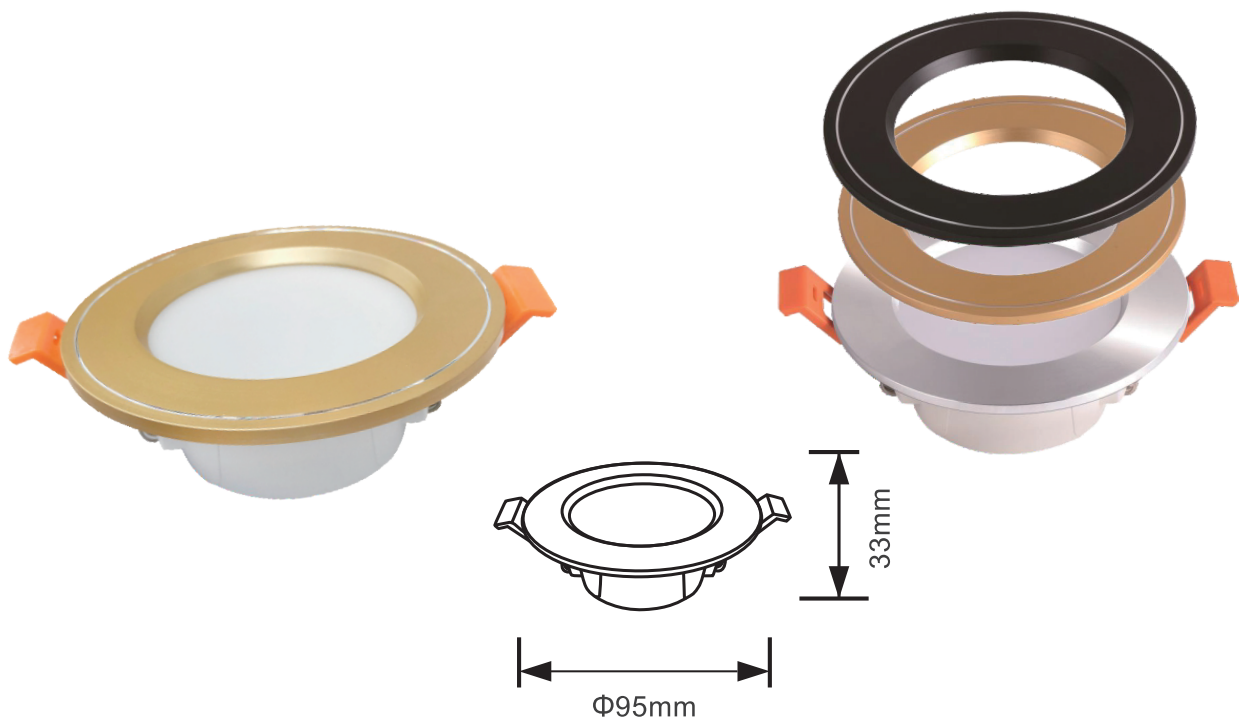

describe





- ① **Shell material:** PC
- ② **Optical lens:** ps diffuser
- ③ **Light source (chip + package / brand + type):** SMD 2835
- ④ **Drive:** Linear scheme
- ⑤ **Applicable working environment:** hotel, aisle, home
- ⑥ **Surface treatment:** white / black / gold / silver

Input: AC220-240V, 50/60Hz
Lamp Type: SMD
Life time: 30000H
Surge: 1.5KV
PF: >0.5
Ta: 45°C


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size	Hole Size
DU-DLQ0305R	5W	105°	300Lm	Φ95x33mm	Φ70~85mm

design philosophy

Imprinted PC material, flame retardant and temperature resistant, multiple colors of face ring optional, suitable for various decoration styles. Integrated linear driver design, durable; no video flash, uniform light, comfortable and natural.

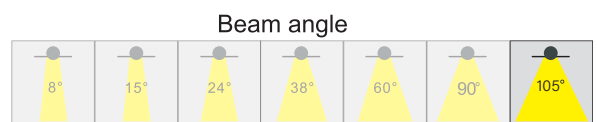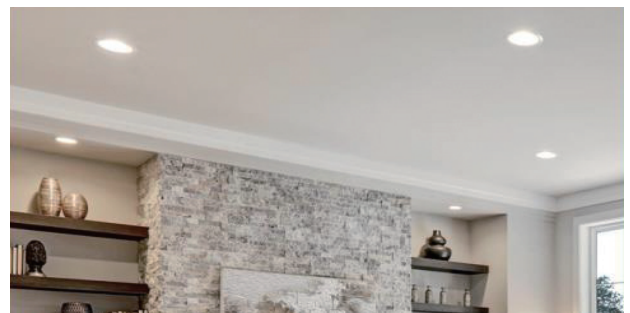


Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
 LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



DU-CLQ01R

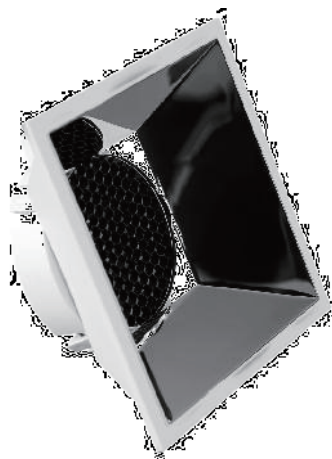

DU-CLQ01S

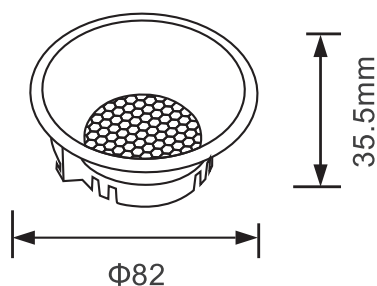


describe

- ① **Shell material and technology:** PC
- ② **Applicable working environment:** hotel, aisle, home
- ③ **Surface treatment:** white / black
- ④ **LED type:** MR16/LED module

design philosophy


Imported PC material, flame retardant and temperature resistant, no yellowing, good color consistency, suitable for MR16 lamp cup, module, flexible and versatile.

Model NO.	Body Size	Hole Size
DU-CLQ01R	Φ82x35.5mm	75x75mm
DU-CLQ01S	82x82x35.5mm	75x75mm




Cellular anti dazzling




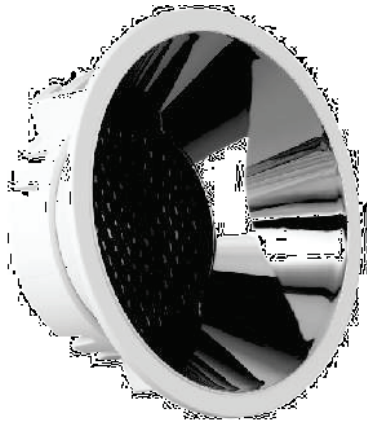

DU-CLQ01R

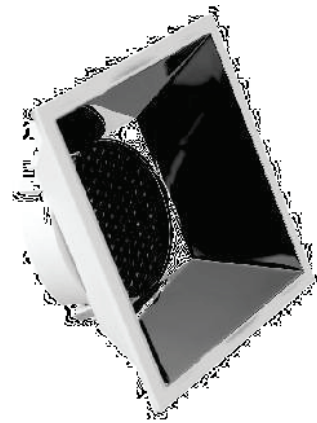

DU-CLQ01S

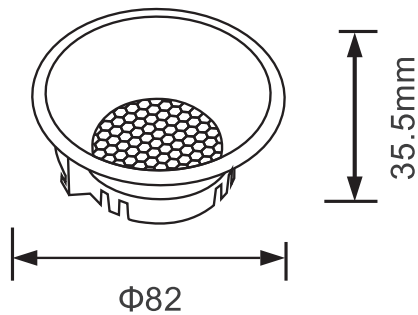


describe

- ① **Shell material and technology:** PC
- ② **Applicable working environment:** hotel, aisle, home
- ③ **Surface treatment:** white / black
- ④ **LED type:** MR16/LED module

design philosophy


Imported PC material, flame retardant and temperature resistant, no yellowing, good color consistency, suitable for MR16 lamp cup, module, flexible and versatile.

Model NO.	Body Size	Hole Size
DU-CLQ01R	Φ82x35.5mm	75x75mm
DU-CLQ01S	82x82x35.5mm	75x75mm



Cellular anti dazzling






DU-CLQ106R



DU-CLQ106S-1

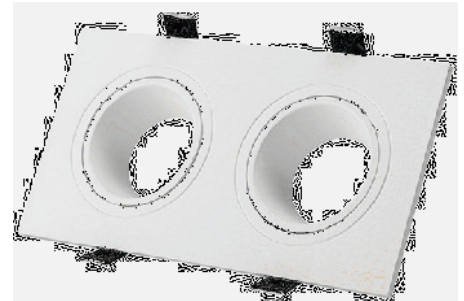

DU-CLQ106S-2

describe



- ① **Shell material and technology:** PC
- ② **Applicable working environment:** hotel, aisle, home
- ③ **Surface treatment:** white / black

design philosophy

Imported PC material, flame retardant and temperature resistant, no yellowing, good color consistency, suitable for MR16 lamp cup, module, flexible and versatile.

Model NO.	Body Size	Hole Size
DU-CLQ103R	Φ88x32mm	Φ75~80mm
DU-CLQ104R	Φ88x32mm	Φ75~80mm
DU-CLQ105R	Φ90x25mm	Φ70mm
DU-CLQ106R	Φ90x29mm	Φ75~80mm
DU-CLQ106S-1	93x93x29mm	Φ75~85mm
DU-CLQ106S-2	173x93x29mm	78x165mm
DU-CLQ106S-3	252x93x29mm	80x240mm

Model NO.	Body Size	Hole Size
DU-CLQ107R	Φ90x25mm	Φ75~85mm
DU-CLQ107S-1	93x93x25mm	Φ75~85mm
DU-CLQ107S-2	173x93x25mm	78 x165mm
DU-CLQ107S-3	253x93x25mm	78 x240mm
DU-CLQ108R	Φ90x25mm	Φ75~85mm
DU-CLQ108S-1	93x93x25mm	Φ75~85mm

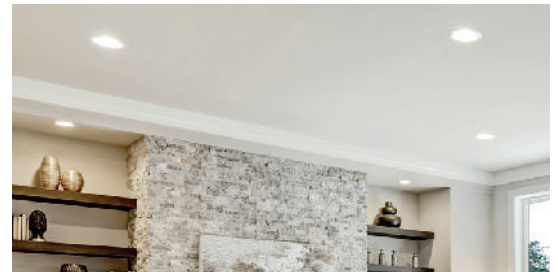

DU-CLQ103R



DU-CLQ104R




DU-CLQ105R



DU-CLQ106S-3



DU-CLQ107R



DU-CLQ107S-1



DU-CLQ107S-2



DU-CLQ107S-3



DU-CLQ108R



DU-CLQ108S-1

LED Spot Light

Cree LED spot light

Dimension

Diameter: 78mm
Depth: 90mm
Cut Out Diameter: 72mm

LED light source

LED wattage: 12w Lumen: 710lm
Lamp: CREE COB LED -3000K/4000K/5700K

Features

Unique style recessed LED down light ,
simple and creative , full directional , easy
and cost-effective ,IP20

- include driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Lacquer white /Sand black

DUCREE011



Cree LED spot light

Dimension

Diameter: 80 x 80mm
Depth: 90mm
Cut Out: 75 x 75mm

LED light source

LED wattage: 12w Lumen: 710lm
Lamp: CREE COB LED -3000K/4000K/5700K

Features

Unique style recessed LED down light ,
simple and creative , full directional , easy
and cost-effective ,IP20

- include driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Lacquer white /Sand black

DUCREE012



Cree LED spot light

Dimension

Diameter: 160 x 80mm
Depth: 90mm
Cut Out: 155 x 75mm

LED light source

LED wattage: 24w (12W x 2) Lumen: 1210lm
Lamp: CREE COB LED -3000K/4000K/5700K

Features

Unique style recessed LED down light ,
simple and creative , full directional , easy
and cost-effective ,IP20

- include driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Lacquer white /Sand black

DUCREE013



Cree LED spot light

Dimension

Diameter: 95mm
Depth: 48mm
Cut Out Diameter: 90mm

LED light source

LED wattage: 12w Lumen: 1020lm
Lamp: CREE COB LED -3000K/4000K/6000K

Features

A contemporary style flushed LED spot light
trimless, combination color finished housing
can beautiful ceiling, IP20

- include driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black

DUCREE014



CREE LED spot light

Dimension

Diameter: 60mm Depth: 69mm
Diameter: 60mm Depth: 81mm
Cut Out Diameter: 55mm

LED light source

LED wattage: 6w Lumen: 540lm
LED wattage: 12w Lumen: 1100lm
Lamp: CREE COB LED -3000K/4000K/5700K

Features

A trimless style down light IP20 , perfectly fit to the
ceiling, deep frame reduce glare

- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white/ Sand black

DUCREE015



CREE LED spot light

Dimension

Diameter: 60mm Depth: 64mm
Diameter: 60mm Depth: 76mm
Cut Out Diameter: 55mm

LED light source

LED wattage: 6w Lumen: 540lm
LED wattage: 12w Lumen: 1100lm
Lamp: CREE COB LED -3000K/4000K/5700K

Features

A trimless style down light IP20 , double frame
decoration, perfectly fit to the ceiling, deep frame
reduce glare

- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black

DUCREE016



CREE LED spot light

Dimension

Diameter: 45mm Depth: 70mm
Cut Out Diameter: 41mm

LED light source

LED wattage: 7w Lumen: 560lm
Lamp: CREE COB LED -3000K/4000K/5700K

Features

A trimless style down light IP20, slim housing, perfectly fit to the ceiling, deep frame reduce glare

- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand White /Sand Black



DUCREE017

CREE LED spot light

Dimension

Diameter: 40mm Depth: 60mm
Cut Out Diameter: 38mm

LED light source

LED wattage: 5w Lumen: 410lm
Lamp: CREE COB LED -3000K/4000K/5700K

Features

A trimless style down light IP20, slim housing, perfectly fit to the ceiling, deep frame reduce glare

- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand White /Sand Black



DUCREE018

CREE LED spot light

Dimension

Diameter: 85mm Depth: 130mm
Cut Out Diameter: 80mm

LED light source

LED wattage: 18w Lumen: 1450lm
Lamp: CREE COB LED -3000K/4000K/5700K



Features

A slender style down light IP20, elegant ho perfectly fit to the ceiling, deep & big mouth reduce glare, expand lighting area

- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black



DUCREE019






Model No: DU-GLQ0515S-1B	Surface Treatment: WH
Power: COB 15W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1400Lm	Working Temperature: -10~45° C
CRI: ≥85	IP: 20
Beam Angle: 24°	Body Size: 116*116*98mm
Color Temperature: 6500/4000/3000K	Hole Size: 105*105mm



DU-GLQ0515S-1B

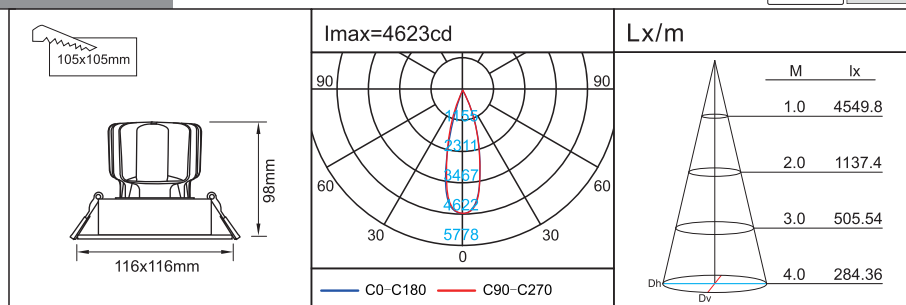





Model No: DU-3007A	Surface Treatment: WH
Power: COB 7W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 660Lm	Working Temperature: -10~45° C
CRI: ≥75	IP: 20
Beam Angle: 45°	Body Size: Φ85*62mm
Color Temperature: 6500/4000/3000K	Hole Size: Φ75mm




DU-3007A

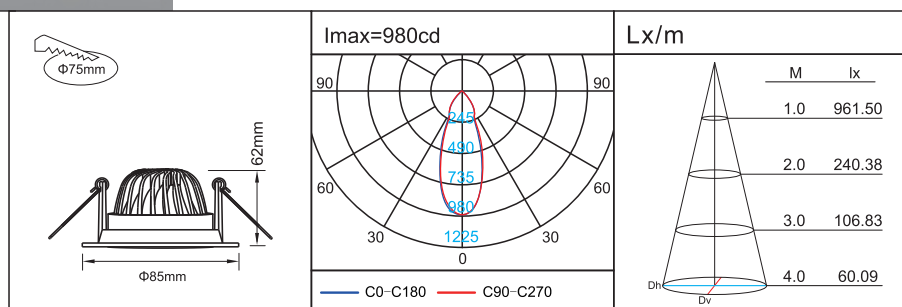

DU-3112A

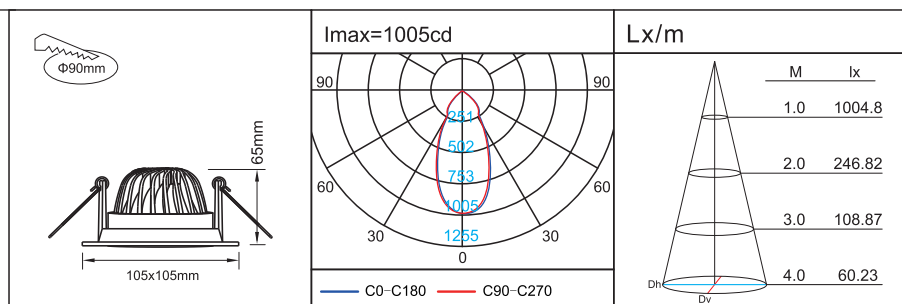


DU-3212A

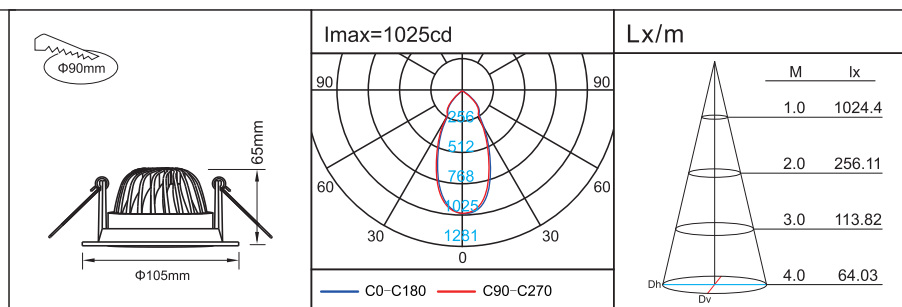

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
DU-3007A	COB 7W	660Lm	45°	WH	Φ85x62mm	Φ75mm
DU-3012A	COB 12W	850Lm	45°	WH	Φ105x65mm	Φ90mm
DU-3107A	COB 7W	660Lm	45°	WH	85x85x62mm	Φ75mm
DU-3112A	COB 12W	850Lm	45°	WH	105x105x65mm	Φ90mm
DU-3207A	COB 7W	660Lm	45°	WH	Φ85x62mm	Φ75mm
DU-3212A	COB 12W	850Lm	45°	WH	Φ105x65mm	Φ90mm
DU-3212A-D	COB 12W	Dimmable 0~850Lm	45°	WH	Φ105x65mm	Φ90mm



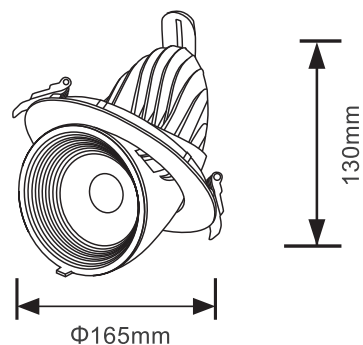

describe

- ① **material** : die-cast aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: clothing store, supermarket
- ⑦ **Surface treatment**: white




Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥90
Ta: 45°C
LED Type: COB

design philosophy


Integrated die-casting radiator, Dalco professional optical lens, lamp head can be rotated and retracted to meet the needs of more lighting angles, use scenarios: clothing stores, supermarket



Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size	Hole Size
DU-CLQ0135R	35W	24°	3500Lm	Φ165x130mm	Φ155mm

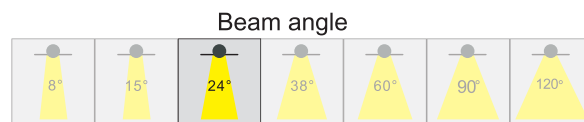

Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
 LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**




describe

- ① **Material:** aluminum
- ② **Optical lens:** PC lens
- ④ **Light source (chip + package / brand + type):** COB
- ⑤ **Drive:** Isolated constant current
- ⑥ **Applicable working environment:** bathroom
- ⑦ **Surface treatment:** white + gray



Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥90
Ta: 45°C
LED Type: COB

design philosophy


Die-cast aluminum lamp body, efficient heat dissipation, sturdy and durable, the lens emits light, the light is even and soft. IP44 protection level, specially designed for bathroom.

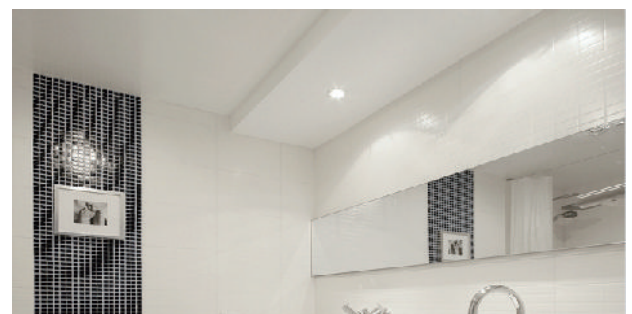

Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size	Hole Size
DU-DLQ10207R	7W	24°	500Lm	Φ95x47mm	Φ75-85mm




LED Spot Light

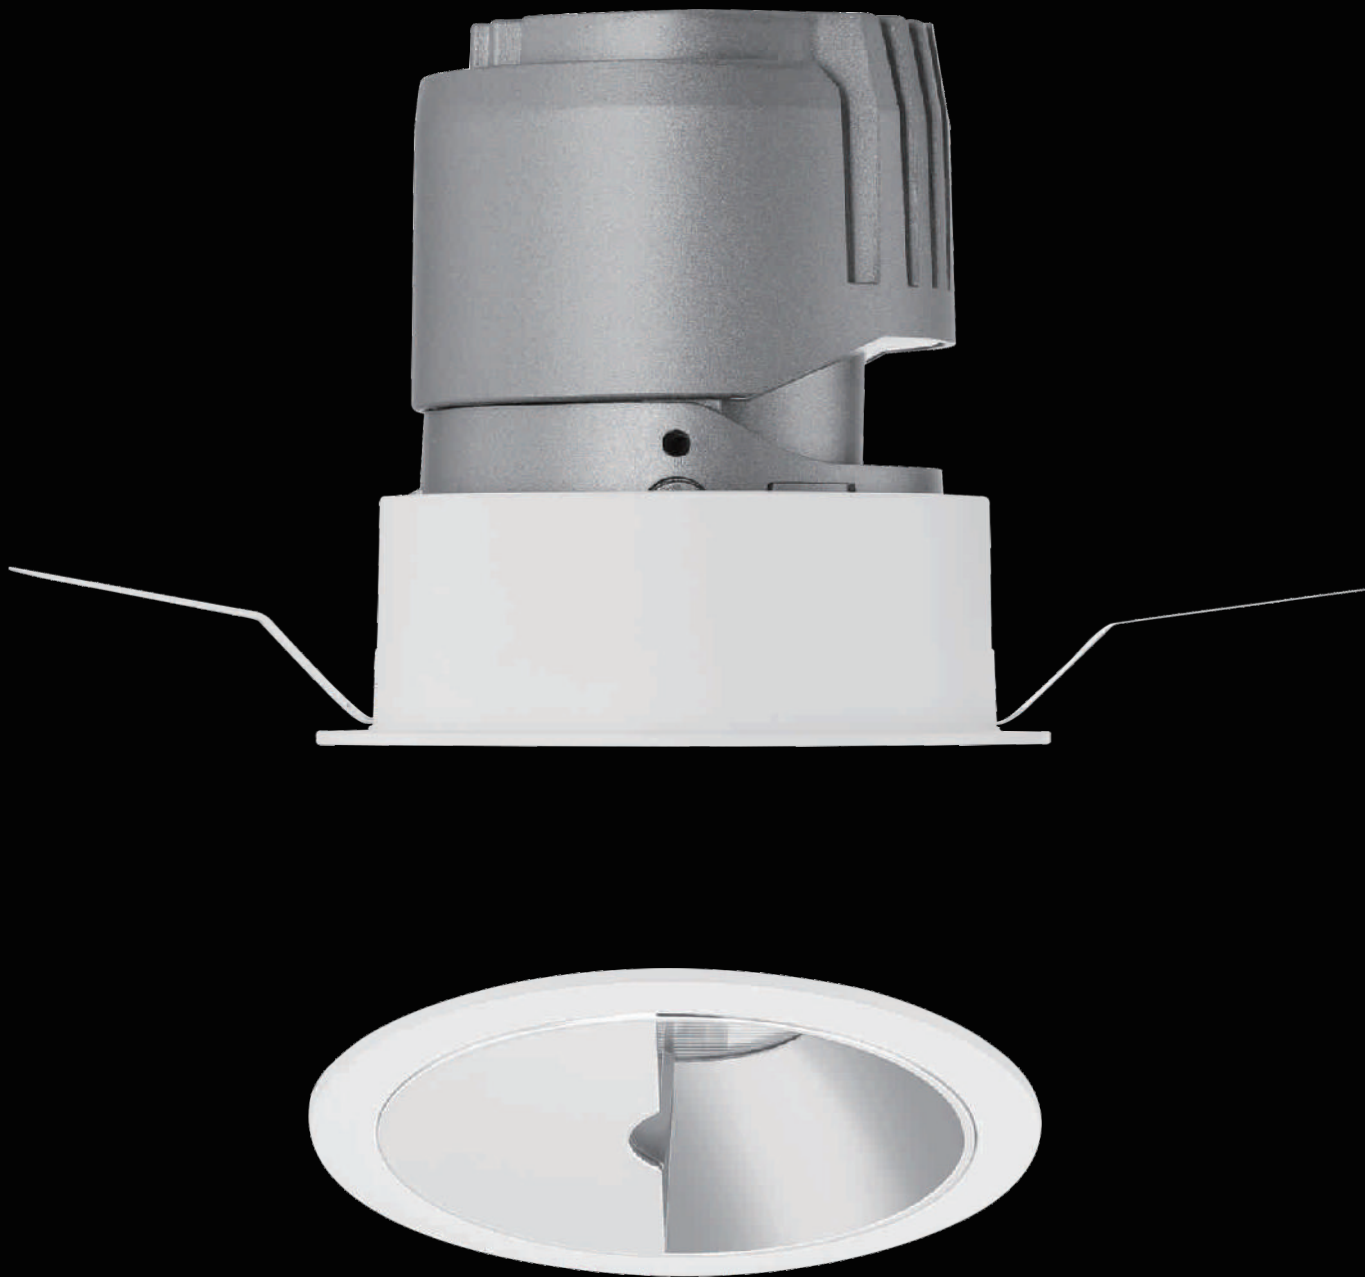




Installation specification

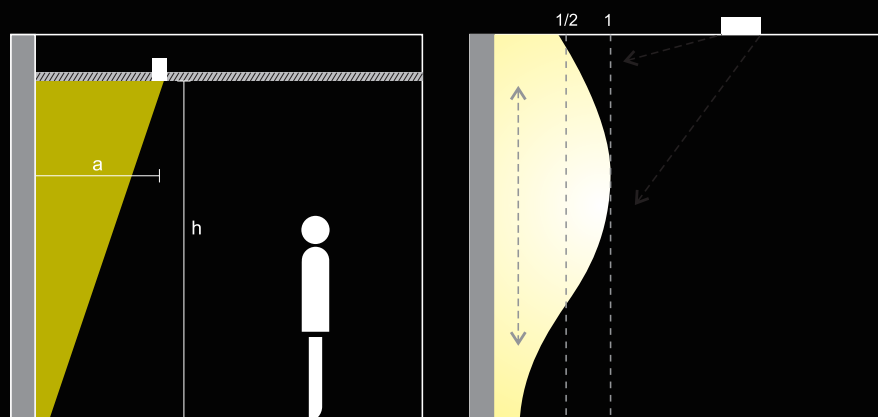

The distance from the fixture to the wall (a) is generally $1/3$ of the height of the wall (h) and the distance between the fixtures (d) is 0.8 meters, achieving a very uniform wall washing effect.

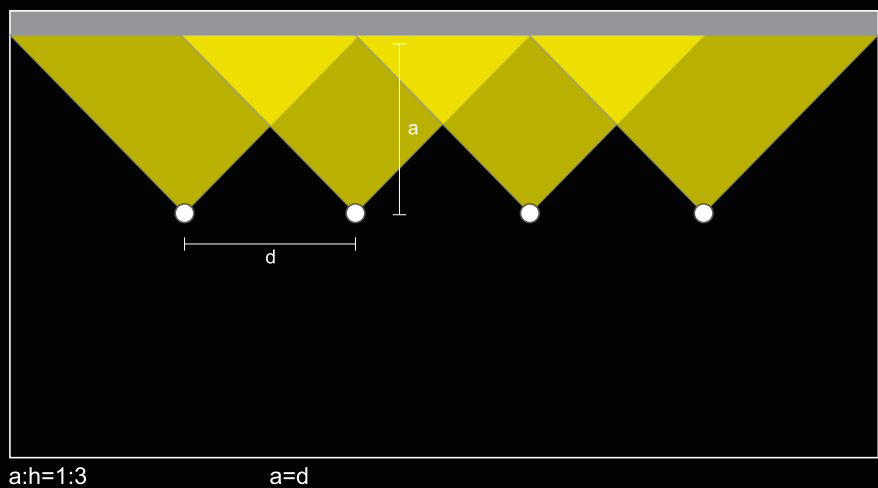


LED Spot Light












DU30-DSC0750-XQ

Beam angle	In put	CRI	Power	Luminous flux
Wall Washer	DC 36V	≥90	5W	400Lm
			7W	560Lm
			9W	720Lm
			12W	960Lm
			15W	1200Lm




Light distribution parameters

Beam angle













DU30-DSBC0750-XQ

Beam angle	In put	CRI	Power	Luminous flux
	DC 36V	≥90	5W	400Lm
			7W	560Lm
			9W	720Lm
			12W	960Lm
			15W	1350Lm




Light distribution parameters

Beam angle




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
ATCI TRIDONIC



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**


LED Spot Light

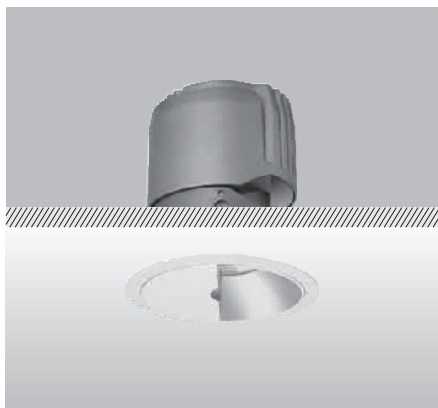


DU30-DSC0950-XQ

Beam angle	In put	CRI	Power	Luminous flux
------------	--------	-----	-------	---------------


Wall Washer	DC 36V	≥90	15W	1200Lm
			18W	1440Lm
			24W	1920Lm
			30W	2400Lm




Light distribution parameters



H (m)	E (lx)	D (cm)
1	302.4	85.37
2	75.61	170.73
3	33.60	256.10
4	18.90	341.46
5	12.10	426.83





H (m)	E (lx)	D (cm)
1	357.3	85.16
2	89.33	170.32
3	39.70	255.48
4	22.33	340.64
5	14.29	425.80



H (m)	E (lx)	D (cm)
1	632.0	83.04
2	158.0	166.09
3	70.22	249.13
4	39.50	332.17
5	25.28	415.22


Beam angle

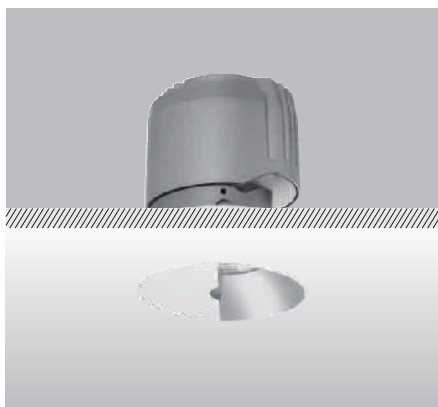


DU30-DSBC0950-XQ

	In put	CRI	Power	Luminous flux
--	--------	-----	-------	---------------


	DC 36V	≥90	15W	1200Lm
			18W	1440Lm
			24W	1920Lm
			30W	2400Lm




Light distribution parameters



H (m)	E (lx)	D (cm)
1	302.4	85.37
2	75.61	170.73
3	33.60	256.10
4	18.90	341.46
5	12.10	426.83





H (m)	E (lx)	D (cm)
1	357.3	85.16
2	89.33	170.32
3	39.70	255.48
4	22.33	340.64
5	14.29	425.80




H (m)	E (lx)	D (cm)
1	632.0	83.04
2	158.0	166.09
3	70.22	249.13
4	39.50	332.17
5	25.28	415.22

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
ATCI TRIDONIC




LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**






Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
 LED Drivers - **PHILIPS** **GTI**
WU **TCI TRIDONIC**
Lighting your ideas



LED Chips - **PHILIPS** **CITIZEN**
High Performance
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

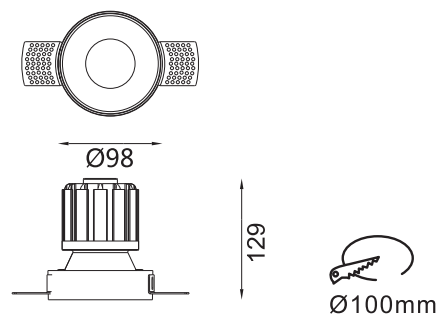

DU5093-20

Max.20W

Operating Temp. : -30°C + 40°C

18W COB chip (DC500mA)


■ 2700K/1300lm CRI90

■ 3000K/1520lm CRI90

■ 4000K/1700lm CRI80

■ 5000K/1840lm CRI70

Beam angle





Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac/Dali

Color selection

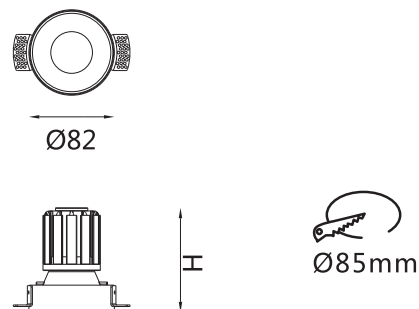

Model	Power	Height
DU5093-09	Max.9W	100
DU5093-15	Max.15W	115

Operating Temp. : -30°C + 40°C

13.5W COB chip (DC350mA)/FS5093-15

■ 2700K/1050lm CRI90

■ 3000K/1080lm CRI90


■ 4000K/1250lm CRI80

■ 5000K/1320lm CRI70


Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10V/Triac



Beam angle



Color selection




Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC

LED Drivers - PHILIPS


LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE SHARP SAMSUNG



LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE SHARP SAMSUNG

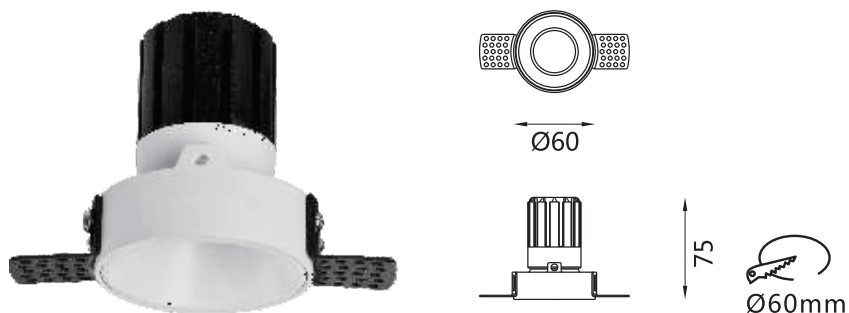

DU5093-05

Max.5W

Operating Temp. : -30°C + 40°C

4.5W COB chip (DC500mA)


■ 2700K/325lm CRI90

■ 3000K/380lm CRI90

■ 4000K/425lm CRI80

■ 5000K/460lm CRI70

Beam angle




Color selection




Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac/Dali




Beam angle





Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC

LED Drivers - PHILIPS GTI



LED Chips - PHILIPS CITIZEN





Model	Power	Height
DU5093A-09	Max.9W	100
DU5093A-15	Max.15W	115

Operating Temp. : -30°C + 40°C

13.5W COB chip (DC350mA)/FS5093A-15


- 2700K/1050lm CRI90
- 3000K/1080lm CRI90
- 4000K/1250lm CRI80
- 5000K/1320lm CRI70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac



Beam angle





Color selection




DU2039A-30



188




Beam angle




Optional Integrated Dimmable Driver / 1-10V/DIM/DALI/TRIAC

LED Drivers - PHILIPS GTI



LED Chips - PHILIPS CITIZEN




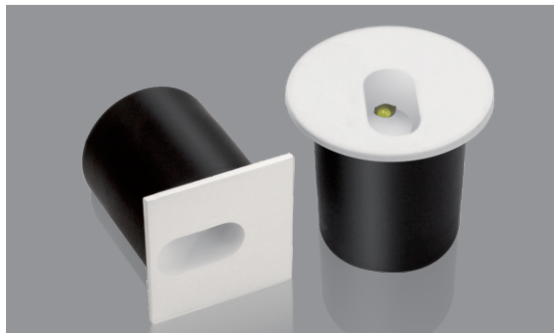

Model No: DU-CLM0603R/ DU-CLM0703S	Surface Treatment: WH
Power: High power 3W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 60Lm	Working Temperature: -10~45° C
CRt: ≥75	IP: 20
Beam Angle: /	Body Size: 45*50mm
Color Temperature: 6500/4000/3000K	Hole Size: /



Model No: DU-CLM0803R/S	Surface Treatment: WH
Power: SMD 3W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 320Lm	Working Temperature: -10~45° C
CRt: ≥75	IP: 20
Beam Angle: /	Body Size: 60*55mm
Color Temperature: 6500/4000/3000K	Hole Size: /

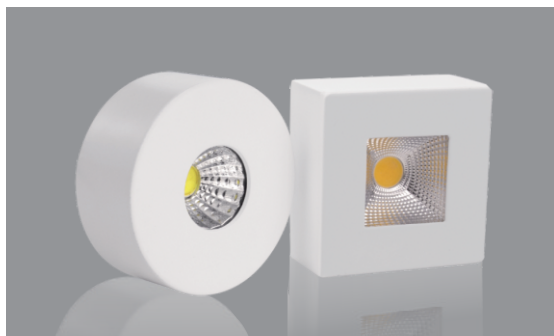


Model No: DU-CLM0903R/S	Surface Treatment: WH
Power: COB 3W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 250Lm	Working Temperature: -10~45° C
CRt: ≥75	IP: 20
Beam Angle: /	Body Size: 60*23mm
Color Temperature: 6500/4000/3000K	Hole Size: /



Model No: DU-1004	Surface Treatment: SL
Power: High power 1W	Life Span: 30000H
Input Voltage: AC100-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 70Lm	Working Temperature: -10~45° C
CRt: ≥70	IP: 20
Beam Angle: 45°	Body Size: Φ30*33mm
Color Temperature: 6500/4000/3000K	Hole Size: Φ20mm

Beam angle



LED Wall Light

CREE LED wall light

Dimension

Length of gooseneck: 380mmL

LED light source

LED wattage: 2w Lumen: 120lm

Lamp: Bridgelux LED -3000K/4000K/6000K

Features

A gooseneck wall light ,bedside light IP20 , flexible arm 380mmL, convenient for life and save room space

- CRI 70-80
- Class II
- Dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : White/Black

DUFREE022
Dimming Switch



CREE LED wall light

Dimension

Length of gooseneck: 380mmL

LED light source

LED wattage: 2w Lumen: 120lm

Lamp: Bridgelux LED -3000K/4000K/6000K

Features

A gooseneck wall light ,bedside light IP20 , flexible arm 380mmL, convenient for life and save room space

- CRI 70-80
- Class II
- Dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : White/Black

DUFREE023
Dimming Switch



CREE LED wall light

Dimension

Length of gooseneck: 380mmL

LED light source

LED wattage: 3w Lumen: 180lm

Lamp: Bridgelux LED -3000K/4000K/6000K

Features

A gooseneck wall light ,bedside light IP20 , flexible arm 380mmL, convenient for life and save room space

- CRI 70-80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : White/Black

DUFREE024



CREE LED wall light

Dimension

Length of gooseneck: 380mmL

LED light source

LED wattage: 3w Lumen: 180lm

Lamp: Bridgelux LED -3000K/4000K/6000K

Features

A gooseneck wall light ,bedside light IP20 , flexible arm 380mmL, convenient for life and save room space

- CRI 70-80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : White/Black

DUFREE025



CREE LED wall light

Dimension

L/W: 50 x L1500MM Cut-Out : 105 x 40 x 50mm

LED light source

LED wattage: 3w Lumen: 210lm

Lamp: CREE COB LED -3000K/4000K/5700K

Features

A flush mounted style wall light ,bedside light IP20 , high-grade brush Aluminium finish , flexible swivel illuminair, convenient for life and save room space

- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Brush Aluminium

DUFREE020



CREE LED wall light

Dimension

Length of gooseneck: 380mmL

LED light source

LED wattage: 2w Lumen: 120lm


Lamp: Bridgelux LED -3000K/4000K/6000K

Features

A gooseneck wall light ,bedside light IP20 , flexible arm 380mmL, convenient for life and save room space

- CRI 70-80
- Class II
- Dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : White/Black

DUFREE021
Dimming Switch





PRODUCT 2020 CATALOGUE

Sonnleithnergasse 2/4/44Wien 1100
Österreich
Vienna - Austril

Contact us:
T: +43 676 449 0575
E: info@deluxlight.eu