


# DELLUX LIGHTING



**Manufactured in Austria  
and China with *TRIDONIC* Technology**



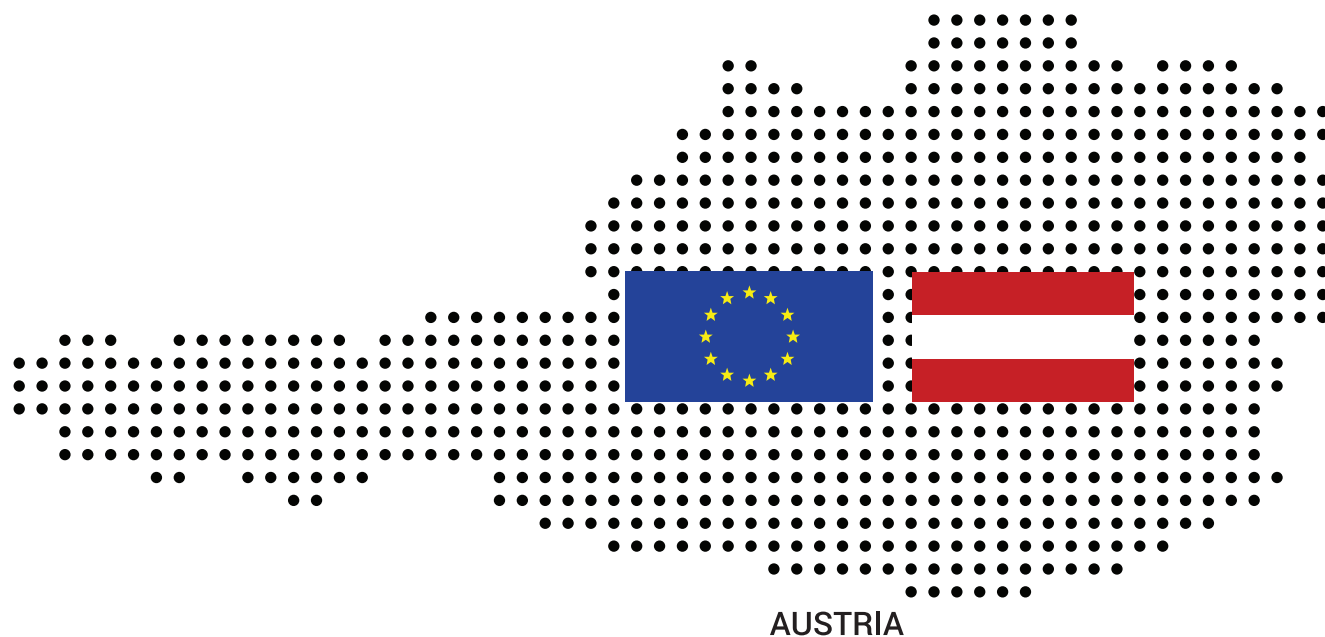

05-Suspended Lights  
34 Pages


# SUSPENDED LIGHTS 05









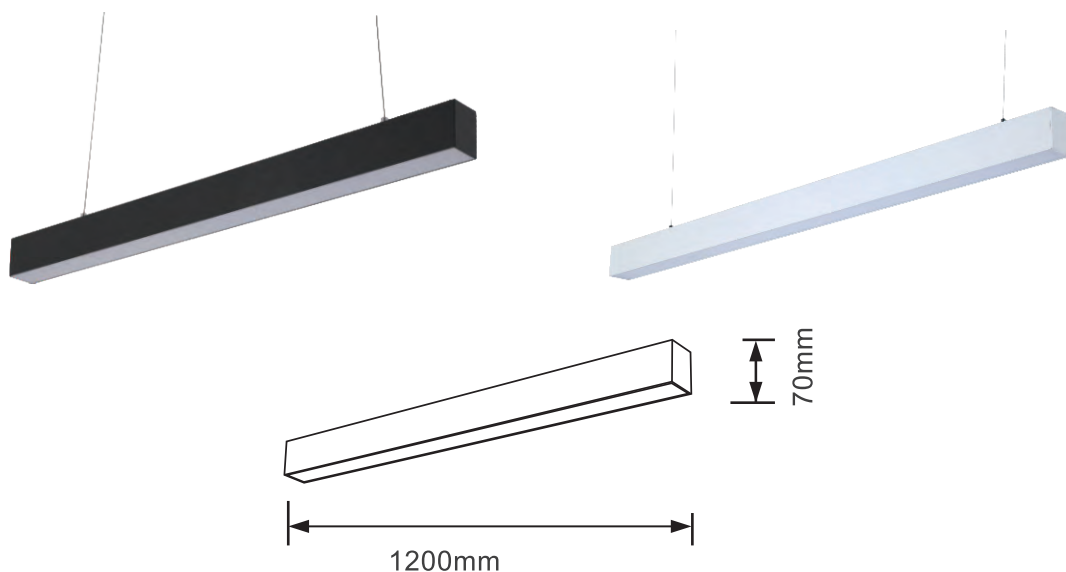

### describe





- ① **Material** : aluminum + PC
- ② **Optical lens**: PC frosted cover
- ④ **Light source (chip + package / brand + type)**: 2835 SMD
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: office building, high-end shopping mall, supermarket, school
- ⑦ **Surface treatment**: white / silver / black

**Input:** AC220-240V, 50/60Hz  
**Life time:** 30000H  
**Ra:** ≥90  
**Ta:** 45°C  
**LED Type:** SMD


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-SD35120L40W	40W	120°	3600Lm	1200x57x70mm
DU-SD35120L60W	60W	120°	5400Lm	1200x57x70mm

### design philosophy


Die-cast integrated aluminum lamp body, electroplated reflector; black light technology, no light when seen, deep anti-glare, UGR <16; Igor brand drive, five-year warranty

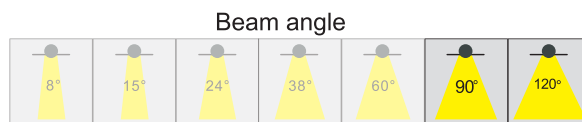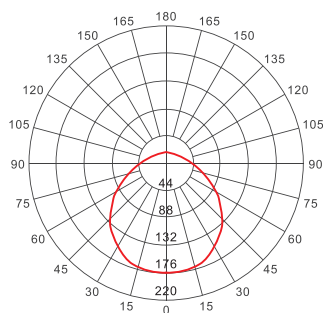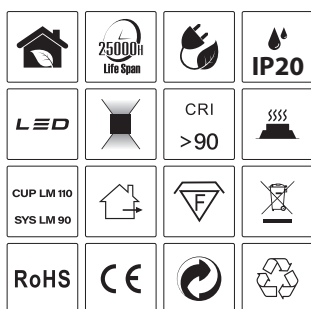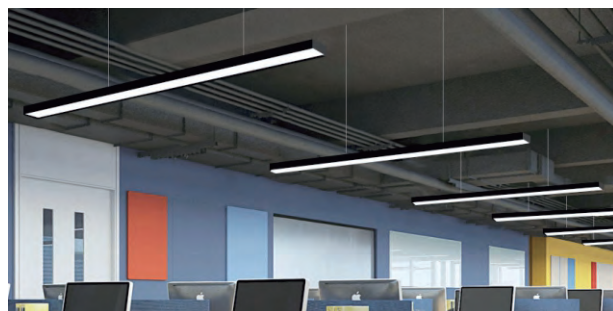

Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
 LED Drivers - **PHILIPS** **ETI**  
**MW** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**

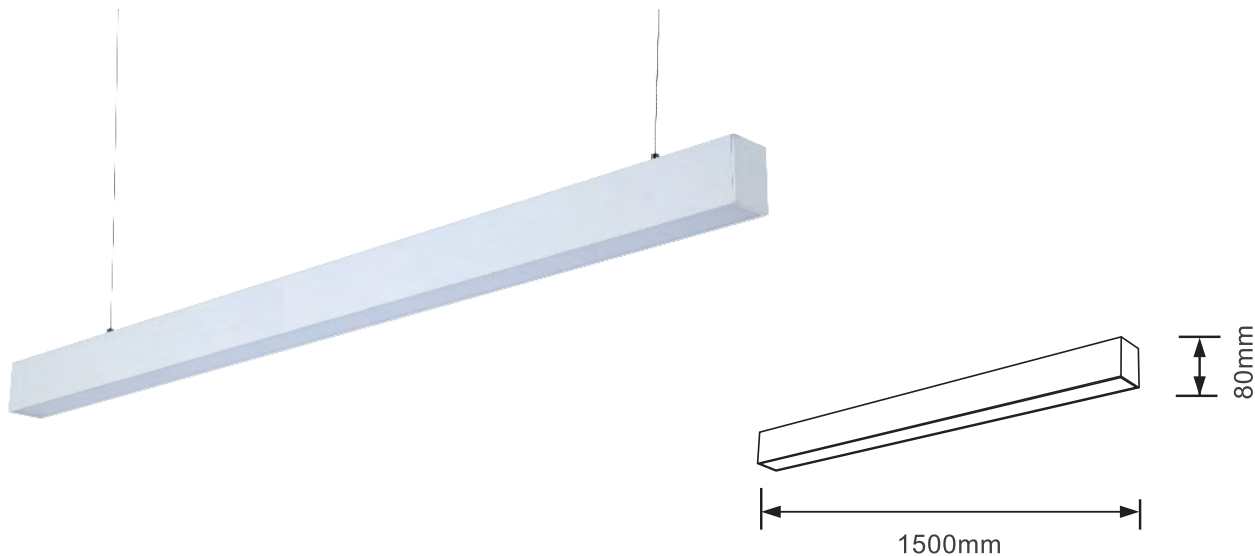

### describe




- ① **Material** : aluminum + PC
- ② **Optical lens**: PC frosted cover
- ④ **Light source (chip + package / brand + type)**: 2835 SMD
- ⑤ **Drive**: Isolated constant current
- ⑥ **Applicable working environment**: office building, high-end shopping mall, supermarket, school
- ⑦ **Surface treatment**: white

**Input:** AC220-240V, 50/60Hz  
**Life time:** 30000H  
**Ra:** ≥ 90  
**Ta:** 45°C  
**LED Type:** SMD


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-SD36120L	50W	120°	4500Lm	1500x62x80mm

### design philosophy


Die-cast integrated aluminum lamp body, electroplated reflector; black light technology, no light when seen, deep anti-glare, UGR <16; Igor brand drive, five-year warranty



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
 LED Drivers - **PHILIPS** **ETI**  
**MW** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**

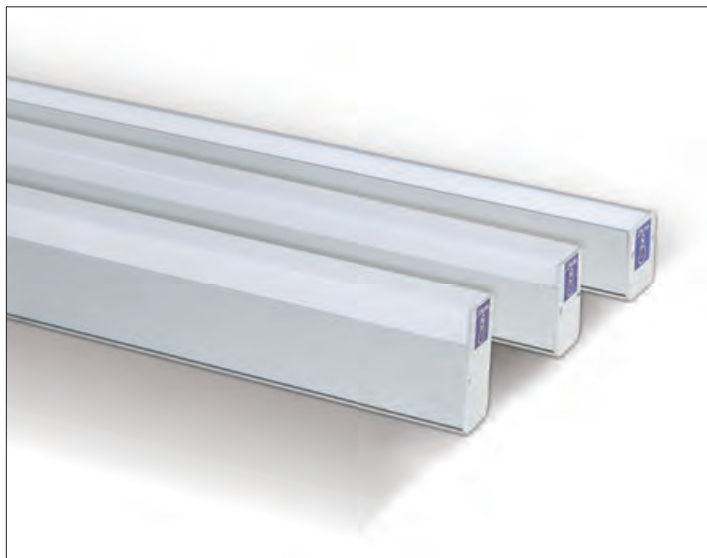

### Description



Linear light is contracted type LED lamps and lanterns, the integration of the aluminum lamp body, lamps and lanterns with strong "beautiful, appearance dimension scale scientific and reasonable, flexible installation. High light transmittance type diffusion PMMA cover astigmatism is developed according to the LED light wavelength, the light evenly without shadow, good effect of anti glare, accused of light mask perfect combination to make the lamps and lanterns and light body more beautiful. Installation is lifting, suction, embedded installation, embedded embedded endless can be realized.

Application places: office buildings, schools, hospitals, supermarkets, hotels, shopping malls, public buildings, etc.







Stand single fitting


Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DU601	40W	3000K / 4000K / 6000K	3800lm	SN	1100x43x64
DU601	60W	3000K / 4000K / 6000K	5700lm	SN	1650x43x64
DU601	80W	3000K / 4000K / 6000K	7600lm	SN	2200x43x64

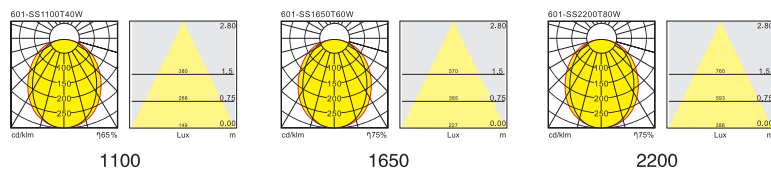

Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DU601-1	40W	3000K / 4000K / 6000K	3800lm	SN	1100x43x80
DU601-1	60W	3000K / 4000K / 6000K	5700lm	SN	1650x43x80
DU601-1	80W	3000K / 4000K / 6000K	7600lm	SN	2200x43x80

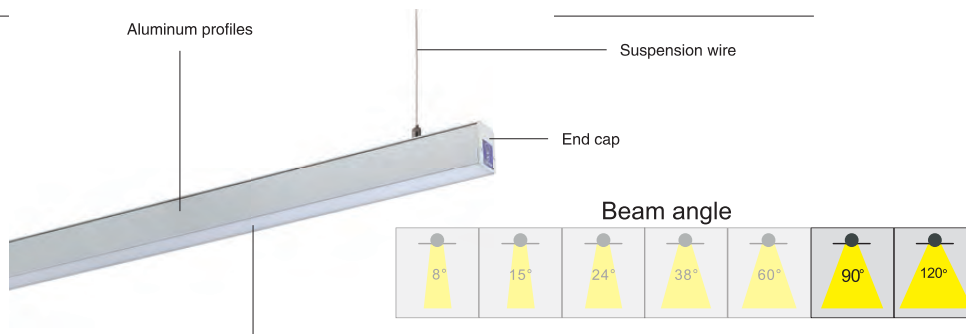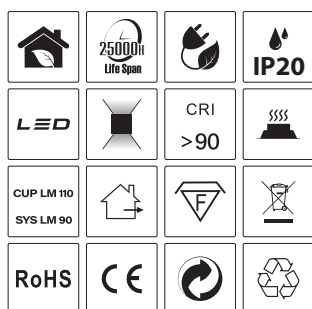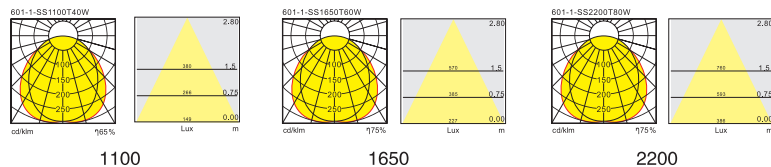

Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
LED Drivers - PHILIPS  
LED Drivers - GTI  
LED Drivers - TRIDONIC









LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE, SHARP, SAMSUNG












### Description

	Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)	
	DU602	50W	3000K / 4000K / 6000K	4750lm	SN	1100x69x80	
	DU602	80W	3000K / 4000K / 6000K	7600lm	SN	1650x69x80	
	DU602	100W	3000K / 4000K / 6000K	9500lm	SN	2200x69x80	
							

	Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)	
	DU602-1	50W	3000K / 4000K / 6000K	4750lm	SN	1100x69x100	
	DU602-1	80W	3000K / 4000K / 6000K	7600lm	SN	1650x69x100	
	DU602-1	100W	3000K / 4000K / 6000K	9500lm	SN	2200x69x100	
							


	Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)	
	DU603	65W	3000K / 4000K / 6000K	6175lm	SN	1100x94x100	
	DU603	100W	3000K / 4000K / 6000K	9500lm	SN	1650x94x100	
	DU603	130W	3000K / 4000K / 6000K	12300lm	SN	2200x94x100	
							



	Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)	
	DU603-1	65W	3000K / 4000K / 6000K	6175lm	SN	1100x94x120	
	DU603-1	100W	3000K / 4000K / 6000K	9500lm	SN	1650x94x120	
	DU603-1	130W	3000K / 4000K / 6000K	12300lm	SN	2200x94x120	
							


Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC

LED Drivers - PHILIPS GTI



LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE, SHARP, SAMSUNG

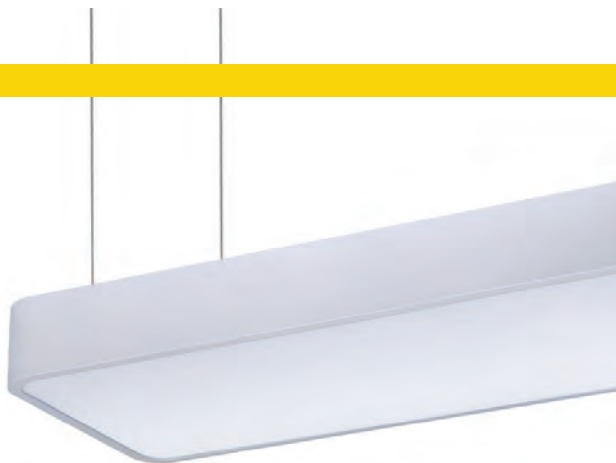

### Description



Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DUSQ450	40W	3000K / 4000K / 6000K	3800lm	WH	450x450
DUSQ600	50W	3000K / 4000K / 6000K	4750lm	WH	600x600





Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DUSQ750	80W	3000K / 4000K / 6000K	7200lm	WH	750x750
DUSQ900	100W	3000K / 4000K / 6000K	9500lm	WH	900x900




Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DUSQ1200	180W	3000K / 4000K / 6000K	17100lm	WH	1200x1200

Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DUSQ3060	30W	3000K / 4000K / 6000K	2850lm	WH	300x600
DUSQ3090	40W	3000K / 4000K / 6000K	3800lm	WH	300x900
DUSQ30120	50W	3000K / 4000K / 6000K	4750lm	WH	300x1200
DUSQ30150	60W	3000K / 4000K / 6000K	5700lm	WH	300x1500
DUSQ6090	80W	3000K / 4000K / 6000K	7600lm	WH	600x900
DUSQ60120	100W	3000K / 4000K / 6000K	9500lm	WH	600x1200
DUSQ60150	120W	3000K / 4000K / 6000K	11400lm	WH	600x1500



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **ATCI** **TRIDONIC**





LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**

## LED Linear Lamp




Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DUR450	40W	3000K / 4000K / 6000K	3800lm	WH	450x80
DUR600	50W	3000K / 4000K / 6000K	4750lm	WH	600x80
DUR750	60W	3000K / 4000K / 6000K	5700lm	WH	750x80
DUR900	80W	3000K / 4000K / 6000K	7600lm	WH	900x80
DUR1200	120W	3000K / 4000K / 6000K	11400lm	WH	1200x80

Item no	Power	Color Temperature	Flux	Color	Lamp Size(mm)
DURR450	40W	3000K / 4000K / 6000K	3800lm	WH	450x80
DURR600	50W	3000K / 4000K / 6000K	4750lm	WH	600x80
DURR750	60W	3000K / 4000K / 6000K	5700lm	WH	750x80
DURR900	80W	3000K / 4000K / 6000K	7600lm	WH	900x80
DURR1200	100W	3000K / 4000K / 6000K	9500lm	WH	1200x80



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



## LED SURFACE/ SUSPENSION LAMP SERIES

Simple and elegant designed LED pendant Light with high quality aluminum body, specially designed heatsink for good dissipation to minimize degradation of the lumens.

Application: household decorative lighting, shops, hotels bars, coffee shops.





### DU3040 SERIES



Selected reflector




Symmetrical



Asymmetric optics

Beam angle



Asymmetric optics



wallwasher



Ø93



Ø93



### DU3040-24

Max.24W

Operating Temp. : -30°C + 40°C

24W COB chip (DC600mA)

2700K/1750lm CRI90

3000K/1950lm CRI90

4000K/2200lm CRI80

5000K/2340lm CRI80

Internal Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali

Selected reflector



Asymmetric optics



wallwasher





Ø73



Ø73




Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC

LED Drivers - PHILIPS



LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE, SHARP, SAMSUNG

DU3040

SERIES



DU3040-10

Max. 10W

Operating Temp. : -30°C + 40°C

10W COB chip (DC250mA)

■ 2700K/700lm CRI90

■ 3000K/800lm CRI90

■ 4000K/930lm CRI80

■ 5000K/1020lm CRI80

Internal Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali

Selected reflector




Beam angle



Asymmetric optics




wallwasher




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC

LED Drivers - PHILIPS GTI



Beam angle



LED Chips - PHILIPS CITIZEN



### DU3040A SERIES



Reflector color option



#### DU3040A-35

Max. 35W

Operating Temp. : -30°C + 40°C

32W COB chip (DC850mA)

2700K/2450lm CRI90

3000K/2730lm CRI90

4000K/3080lm CRI80


5000K/3360lm CRI80

Internal Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali

#### Beam angle

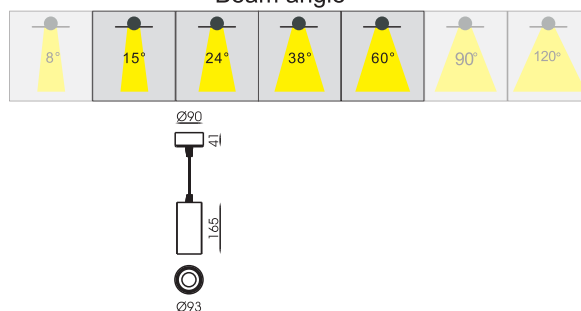

Reflector color option



#### DU3040A-24

Max. 24W

Operating Temp. : -30°C + 40°C

24W COB chip (DC600mA)

2700K/1750lm CRI90

3000K/1950lm CRI90

4000K/2200lm CRI80



5000K/2340lm CRI80

Internal Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: 0~10v/Triac/Dali

#### Beam angle

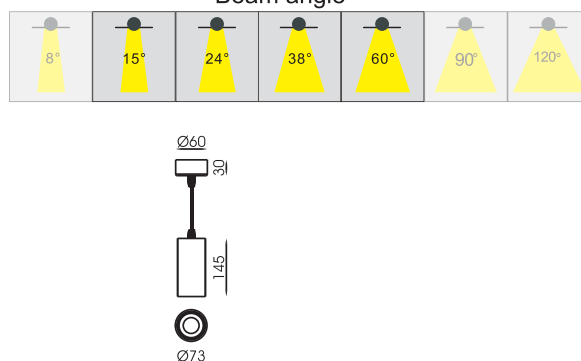

Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC

LED Drivers - PHILIPS GTI




LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE, SHARP, SAMSUNG



### DU3040A SERIES



Reflector color option



### DU3040A-10

Max. 10W

Operating Temp. : -30°C + 40°C

10W COB chip (DC250mA)

■ 2700K/700lm CRI90

■ 3000K/800lm CRI90


■ 4000K/930lm CRI80

■ 5000K/1020lm CRI80

Internal Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali




Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC

LED Drivers - PHILIPS **GTI**



Beam angle



LED Chips - PHILIPS CITIZEN



## DUX918 Family



DUX918



DUX918G/5T+LED DIY





DUX918G/1T+LED DIY



DUX918P DIY

### Installation

Recessed




### Beam angle



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC


LED Drivers - PHILIPS **GTI**



LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE, SHARP, SAMSUNG

### SPECIFICATION

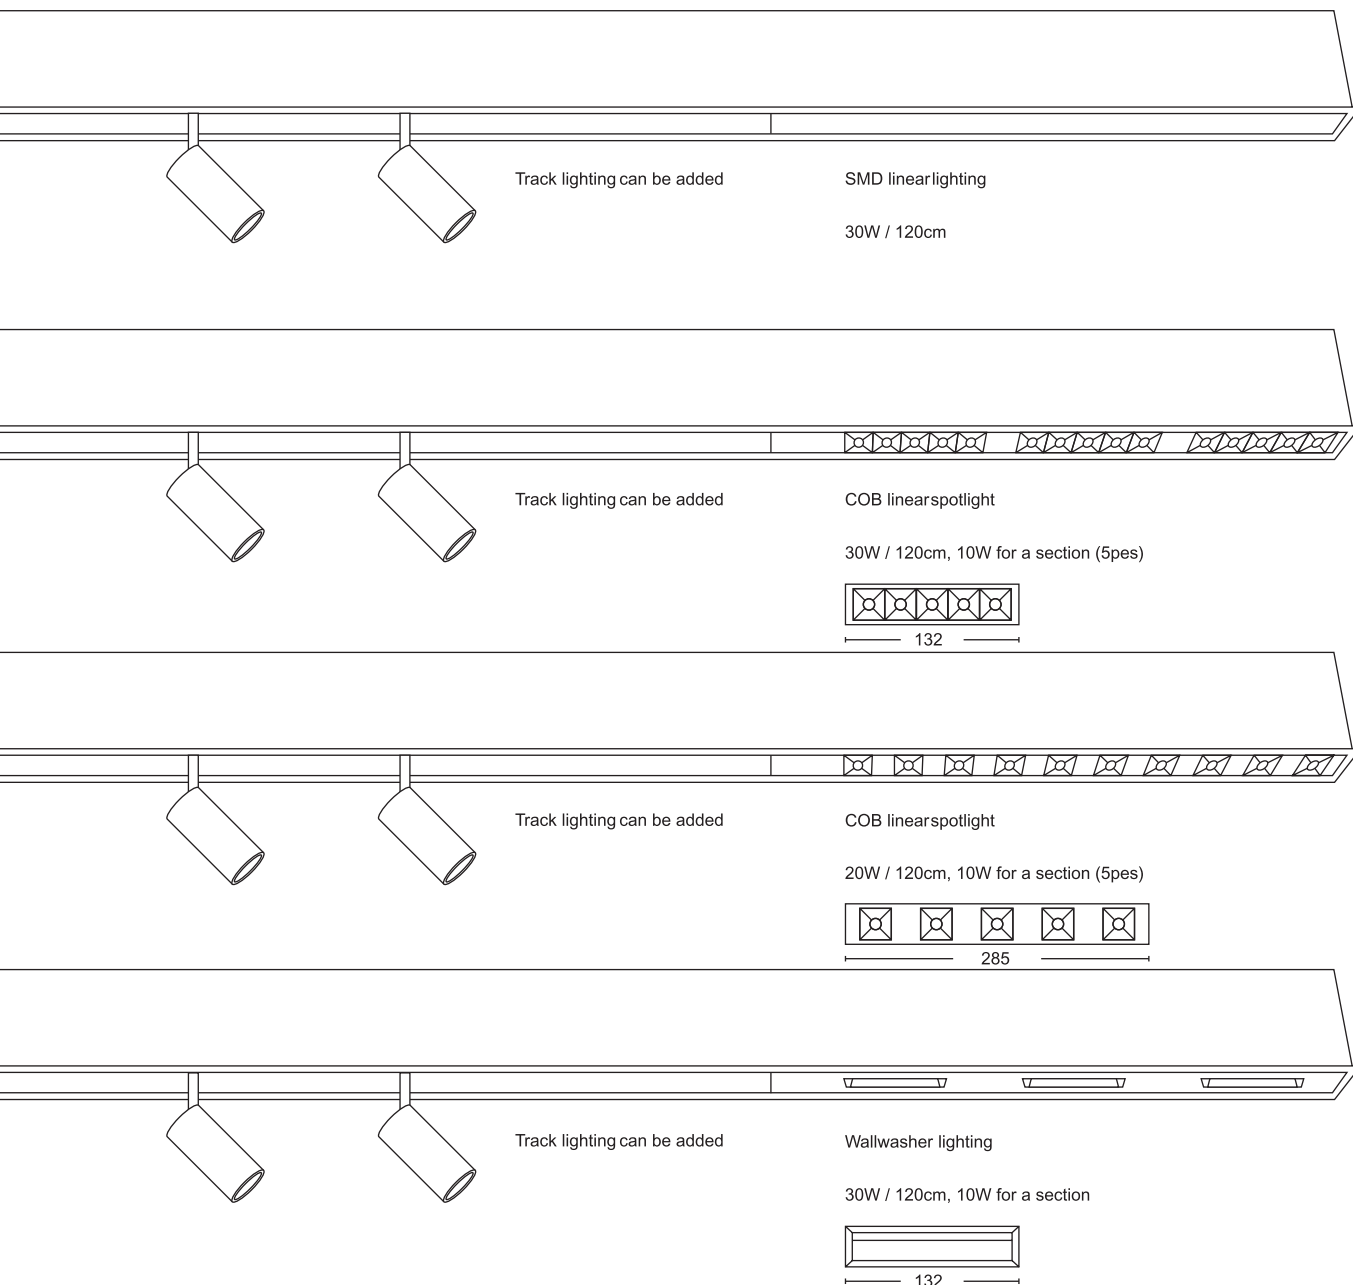


### FEATURE

The modular structure of the system makes it easy to expand and adapt to various needs.

Modularity helps designers adapt the system to the appropriate space, and it is easier to manufacture and install on site.


The multi angle connector ensures fast and convenient installation, and makes the shape to achieve ever-changing effect, more in line with the lighting requirements of modern office environment.

#### Beam angle







DUX917

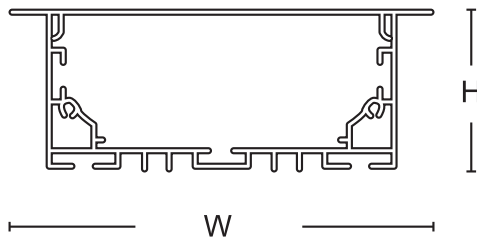


Power	Flux	Size(LxWxH)	Colour	Dimming	CCT	Body Material	Diffuser Material	End Cap Material
15W	1250 lm	600x91.4x35mm	● Sand black	Dail 1-10V Dim Switch	3000K	6063 Aluminum	PMMA	Die casting aluminum
20W	1650 lm	900x91.4 x35mm	● Matte black		4000K			
30W	2460 lm	1200x 91.4 x35mm	● Sand white		5000K			
45W	3750 lm	1500x 91.4 x35mm	● Matte white		6000K			
			● Wood grain					
			● Silver					

### Installation


Recessed



### Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
LED Drivers - **GTI**  
LED Drivers - **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**







### DUX117

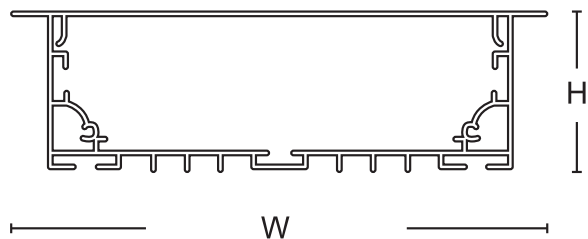


Power	Flux	Size(LxWxH)	Colour	Dimming	CCT	Body Material	Diffuser Material	End Cap Material
15W	1250 lm	600x117x35mm	● Sand black	Dail 1-10V Dim Switch	3000K	6063 Aluminum	PMMA	Die casting aluminum
20W	1650 lm	900x117x35 mm	● Matte black		4000K			
30W	2460 lm	1200x117x35 mm	● Sand white		5000K			
45W	3750 lm	1500x117x35 mm	● Matte white		6000K			
			● Wood grain					
			● Silver					

### Installation


#### Recessed



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
LED Drivers - GTI  
LED Drivers - TRIDONIC




### Beam angle



LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE, SHARP, SAMSUNG




DUD355

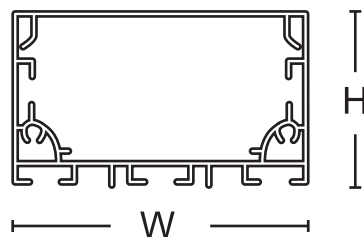



Power	Flux	Size(LxWxH)	Colour	Dimming	CCT	Body Material	Diffuser Material	End Cap Material
15W	1250 lm	590x55x32mm	● Sand black	Dail 1-10V Dim Switch	3000K 4000K 5000K 6000K	6063 Aluminum	PMMA	Die casting aluminum
20W	1650 lm	880x 55x32 mm	● Matte black					
30W	2460 lm	1170x 55x32 mm	● Sand white					
45W	3750 lm	1460x 55x32 mm	● Matte white					
			● Wood grain					
			● Silver					

### Installation


Pendant/Aluminum side pass



### Beam angle

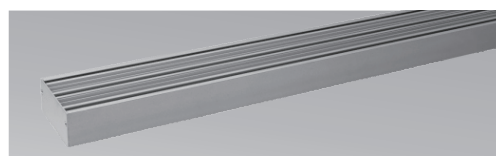


Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
LED Drivers - **GTI**  
LED Drivers - **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**





DUD376

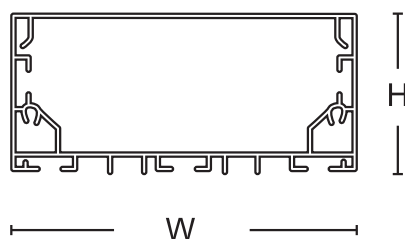



Power	Flux	Size(LxWxH)	Colour	Dimming	CCT	Body Material	Diffuser Material	End Cap Material
15W	1250 lm	590x76.2x35mm	● Sand black	Dail 1-10V Dim Switch	3000K	6063 Aluminum	PMMA	Die casting aluminum
20W	1650 lm	880x76.2x35 mm	● Matte black		4000K			
30W	2460 lm	1170x76.2x35 mm	○ Sand white		5000K			
45W	3750 lm	1460x76.2x35 mm	○ Matte white		6000K			
			● Wood grain					
			○ Silver					

### Installation


Pendant/Aluminum side pass

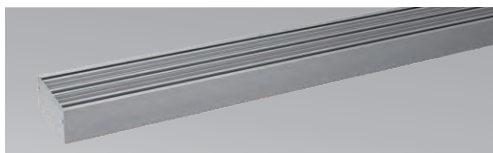

### Beam angle





Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
LED Drivers - **GTI**  
LED Drivers - **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**





DUS0001  
D55\*H18.5

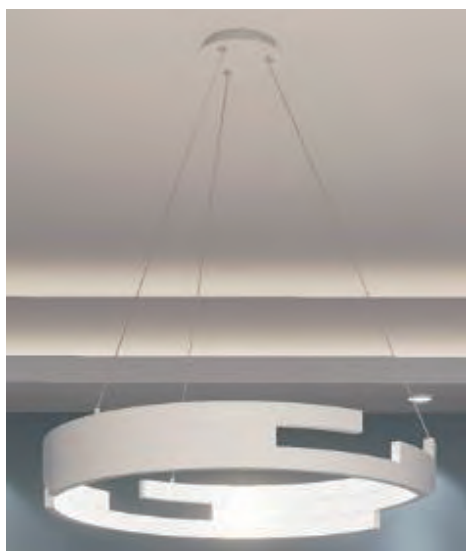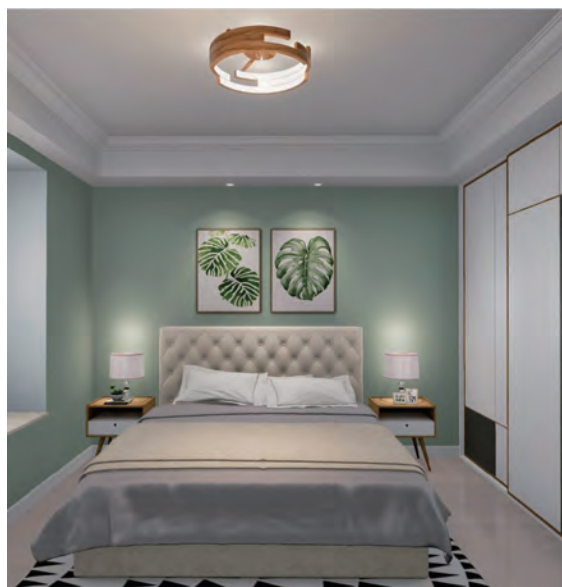

DUS0002  
D80\*H120

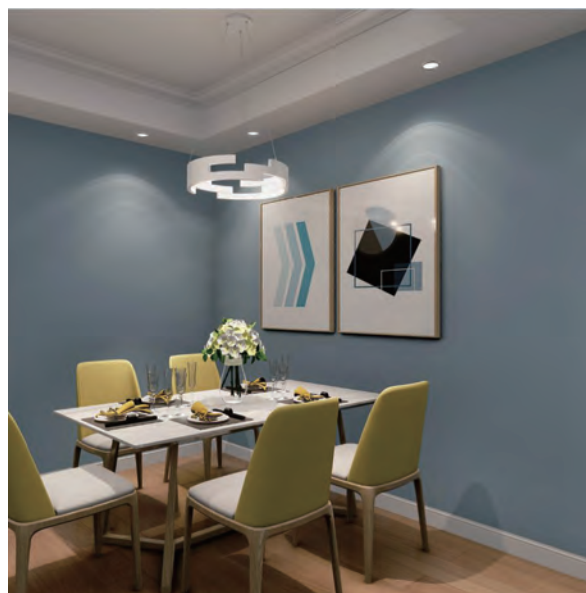


Beam angle






Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



Beam angle						
						
8°	15°	24°	38°	60°	90°	120°



Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC

LED Drivers - **PHILIPS** **ETI**

**MW** **TCI** **TRIDONIC**

MEAN WELL professional light applications  enlightening your ideas



LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE SHARP SAMSUNG






DUS0006  
D112.4\*H49




DUS0007  
L82\*W55\*H27



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX**, **CREE**, **SHARP**, **SAMSUNG**





DUS0008  
L52\*W16\*H61




DUS0009  
L55\*W30\*H120  
L84\*W68\*H120




DUS0010  
L55\*W30\*H120  
L76\*W30\*H120  
L97\*W67\*H120






Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **TCI TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**




DUS0014  
L111.5\*W40.5\*H150  
L132\*W71\*H150




DUS0015  
D81\*H120  
D114\*H120  
D151\*H120



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **TCI TRIDONIC**



LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE SHARP SAMSUNG



DUS0016  
L11\*W8\*H33




DUS0017  
D20\*H38



DUS0018  
D70\*H60

Beam angle



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **WTCI TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



DUS0019  
D66\*H160  
D96\*H160




DUS0020  
D64\*H17  
D84\*H23  
D104\*H29



Beam angle













Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **TCI TRIDONIC**  
Lighting your idea



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**





Beam angle						
						
8°	15°	24°	38°	60°	90°	120°



Color Temperature (K)	Color Name
1900K	Candle
2200K	High Pressure
2700-3000K	Warm White
4000-4500K	Natural White
4800K	Direct Sun
5000-6000K	Day White
7000-7500K	Cool White
10,000K	Blue Sky

LED Chips - PHILIPS CITIZEN  
BRIDGELUX CREE SHARP SAMSUNG



A modern, curved chandelier with a brushed metal finish and multiple tiers of crystal droplets. The fixture is composed of two main curved metal rings, one above the other, with a series of crystal droplets hanging from the lower ring. The background is black.

A large, ornate chandelier with multiple tiers of gold-colored cylindrical shades and cascading crystal strands, set against a black background. The chandelier features a central gold-colored ceiling plate with several thin wires hanging down. The main body consists of several horizontal tiers of gold-colored cylindrical shades, some of which are illuminated from within. Between and below these tiers are large, cascading clusters of clear and yellow crystals, creating a dramatic, multi-tiered effect. The overall design is modern yet classic, with a focus on light and crystal.



LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE SHARP SAMSUNG



DUS0026  
D55\*H120  
D80\*H120




DUS0027  
L155\*W54\*H120



Beam angle



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
LED Drivers - PHILIPS **GTI**  
BRIDGELUX, CREE, SHARP, SAMSUNG




LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE, SHARP, SAMSUNG



DUS0029  
D63\*H90  
D78\*H90



Beam angle



Beam angle
8°
15°
24°
38°
60°
90°
120°




Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC

LED Drivers - **PHILIPS** **ETI**

**MW** **TCI** **TRIDONIC**

MEAN WELL professional light applications  enlightening your ideas



LED Chips - **PHILIPS** **CITIZEN**  
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

DUS0030  
L10\*W19\*H34




DUS0031  
D60\*H34




DUS0032  
D60\*H34



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**WU** **TCI TRIDONIC**  
Powering your idea



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



A large, heart-shaped chandelier made of many small, clear, leaf-like or crystal-like pieces hanging from a ceiling. The chandelier is composed of numerous small, clear, leaf-like or crystal-like pieces that form a dense, heart-shaped cluster. It is suspended from a ceiling by a thin wire and a metal ring. The background is black.

A spherical chandelier composed of numerous small, clear, faceted crystals or glass pieces arranged in a dense, round cluster. It hangs from a simple metal chain against a black background.

Diagram illustrating beam angles (8°, 15°, 24°, 38°, 60°, 90°, 120°) and their corresponding beam spread.



Color Temperature	Color Name
1900K	Candle
2200K	High Pressure
2700-3000K	Warm White
4000-4500K	Natural White
4800K	Direct Sun
5000-6000K	Day White
7000-7500K	Cool White
10,000K	Blue Sky

LED Chips - **PHILIPS** **CITIZEN**  
BRIDGELUX **CREE** **SHARP** **SAMSUNG**





# PRODUCT 2020 CATALOGUE

Sonnleithnergasse 2/4/44Wien 1100  
Österreich  
Vienna - Austril

Contact us:  
T: +43 676 449 0575  
E: [info@deluxlight.eu](mailto:info@deluxlight.eu)