


DELLUX LIGHTING



**Manufactured in Austria
and China with *TRIDONIC Technology***



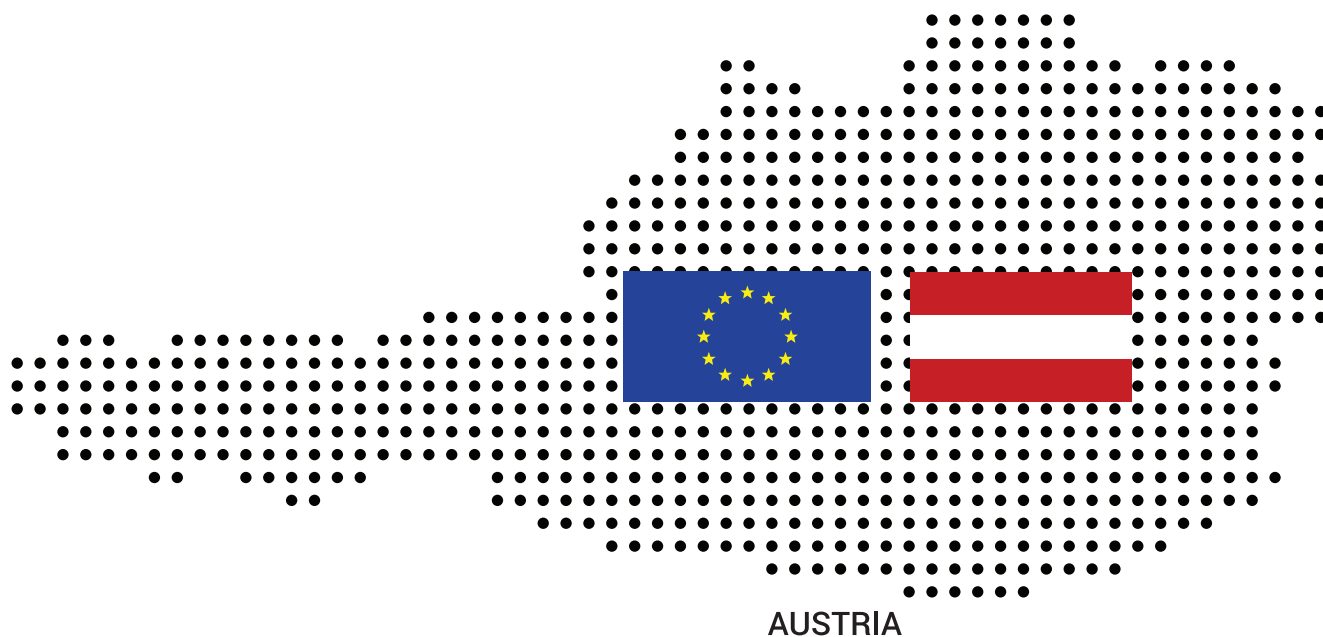


04-Track Lights 46 Pages



TRACK LIGHTS 04



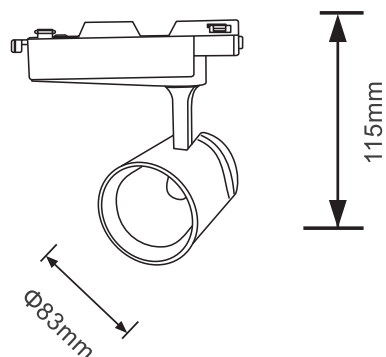

describe





- ① **Material** : die-cast aluminum
- ② **Optical lens**: Electroplated reflector
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Non-isolated constant current
- ⑥ **Applicable working environment**: clothing store, shop
- ⑦ **Surface treatment**: black

Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥90
Ta: 45°C
LED Type: COB

Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-TL5030	30W	24°	3000Lm	Φ83x145x115mm

design philosophy

Free zoom, multi-purpose light, rotating light head can adjust the light emitting angle, condensing and astigmatism can be applied to various environments according to the actual needs of customers

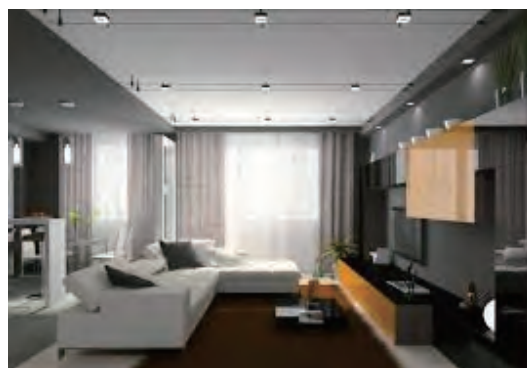

Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
 LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



describe





- ① **Material** : aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: Hongli COB
- ⑤ **Drive**: Non-isolated constant current
- ⑥ **Applicable working environment**: clothing store, art gallery, museum
- ⑦ **Surface treatment**: black

Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥ 90
Ta: 45°C
LED Type: COB


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-TL4430	30W	15~60°	2200Lm	Φ79x155x170mm

design philosophy


Free zoom, multi-purpose light, rotating light head can adjust the light emitting angle, condensing and astigmatism can be applied to various environments according to the actual needs of customers

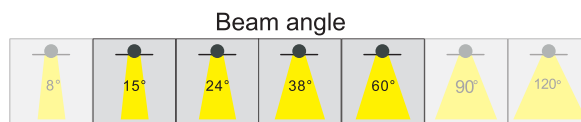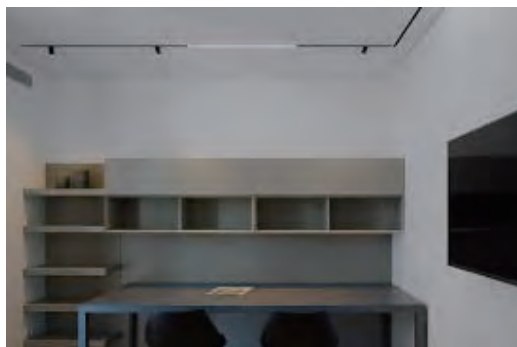

Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
 LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



describe




- ① **Material** : aluminum
- ② **Optical lens**: PC lens
- ④ **Light source (chip + package / brand + type)**: COB
- ⑤ **Drive**: Non-isolated constant current
- ⑥ **Applicable working environment**: special counter, clothing shop, convention Center and other special shop.
- ⑦ **Surface treatment**: black / white

Input: AC220-240V, 50/60Hz
Life time: 30000H
Ra: ≥ 90
Ta: 45°C
LED Type: COB


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size
DU-TL6907	7W	24°	500Lm	Φ51x98x136mm
DU-TL6912	12W	24°	1000Lm	Φ56x99x137mm
DU-TL6920	20W	24°	2000Lm	Φ76x131x175mm
DU-TL6930	30W	24°	2700Lm	Φ87x141x178mm
DU-TL6940	40W	24°	3000Lm	Φ87x161x181mm

design philosophy


Simple lamp body design, professional lens scientific light distribution, high light transmittance, uniform and soft spot without dark spots; deep tube anti-glare and not glare.

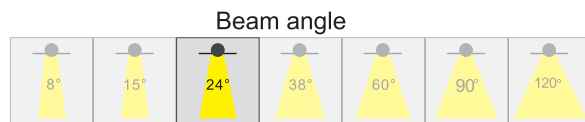

Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
 LED Drivers - **PHILIPS** **ETI**
MW **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



Product parameters

Model	Power	Beam angle	Lumen
DUT-101-1	8W	10°/15°/24°/38°/60°	>83lm/W
DUT-101-2	12W	10°/15°/24°/38°/60°	>83lm/W
DUT-101-3	12W	10°/15°/24°/38°/60°	>83lm/W

Light source	CRI	Track Adaptor	Input Voltage
CREE	>80/90	2wire/3wire/4wire	AC220-240V

Installation

DUT-101-1

DUT-101-2

DUT-101-3





Track mounting






Product details





Ceiling mounting




Recessed mounting



Beam angle





White




Black

Product parameters


Model	Power	Beam angle	Lumen
DUT-108-1	20W	10°/24°/38°	>83lm/W
DUT-108-2	30W	10°/24°/38°	>83lm/W
DUT-108-3	40W	10°/24°/38°	>83lm/W

Light source	CRI	Track Adaptor	Input Voltage
CREE	>80	2wire/3wire/4wire	AC220-240V


Product details






DUT108-1




DUT108-2




DUT108-3



Beam angle





White



Black

Product parameters


Model	Power	Beam angle	Lumen
DUT-113-1	20W	10°/24°/38°	>83lm/W
DUT-113-2	30W	10°/24°/38°	>83lm/W
DUT-113-3	40W	10°/24°/38°	>83lm/W

Light source	CRI	Track Adaptor	Input Voltage
CREE	>80	2wire/3wire/4wire	AC220-240V


Product details






DUT113-1




DUT113-2



DUT113-3




Beam angle





Recessed LED Retracted spot light with high purity molding, slide up-and-down positioning design and 360° horizontally 90° vertically provides flexible projection demand .
Application: fashion shop, jewelry display and other high end accent lighting areas.



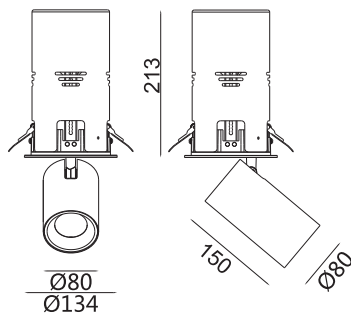

DU1064-30

Max. 30W

Operating Temp. : -30°C + 40°C

26W COB chip (DC700mA)

■ 2700K/2017lm CRI90

■ 3000K/2340lm CRI90

■ 4000K/2645lm CRI80


■ 5000K/2943lm CRI70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac


Beam angle



Color selection



LED	SMD	CRI >90	
CUP LM 110 SYS LM 90			
RoHS	CE		

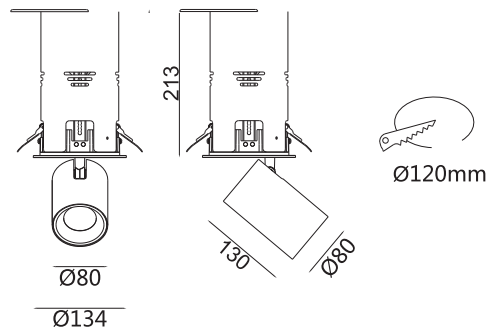

DU1064-20

Max.20W

Operating Temp. : -30°C + 40°C

17.5W COB chip (DC500mA)


- 2700K/1405lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

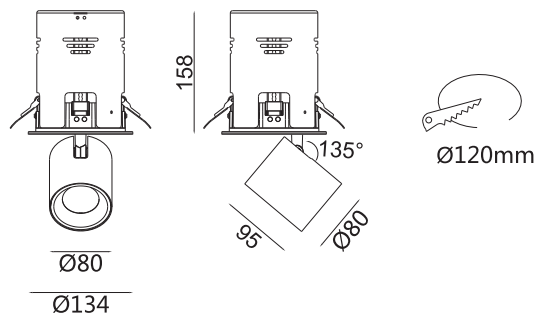

DU1064-15

Max.15W

Operating Temp. : -30°C + 40°C

13W COB chip (DC350mA)



- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1370lm CRI80
- 5000K/1550lm CRI70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

Beam angle



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC

LED Drivers - PHILIPS GTI




LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE SHARP SAMSUNG




Family design


Recessed



Surface mounted



Track



Pendant





Product parameters

Model	Power	Size (DxH)	Cut out	Lighting direction
DU-CR55 07	7W	Ø55*134mm	Ø75mm	Recessed
DU-CR55 12	12W	Ø55*178mm	Ø75mm	Recessed
DU-CR75 20	20W	Ø75*166mm	Ø75mm	Recessed


Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<10




Product parameters

Model	Power	Size (DxH)	Lighting direction
DU-SR55 07	7W	Ø55*134mm	Surface mounted
DU-SR55 12	12W	Ø55*178mm	Surface mounted
DU-SR75 20	20W	Ø75*166mm	Surface mounted

Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<10

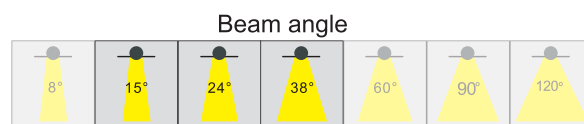


Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**






Product parameters

Model	Power	Size (DxH)	Lighting direction
DU-SR78 07	7W	Ø78*110mm	Surface mounted
DU-SR78 12	12W	Ø78*110mm	Surface mounted



Beam angle	Light source	CRI	UGR
12° 23° 38°	COB	>90	< 10



Product parameters

Model	Power	Size (DxH)	Lighting direction
DU-SS78 07	7W	78*78*110mm	Surface mounted
DU-SS78 12	12W	78*78*110mm	Surface mounted

Beam angle	Light source	CRI	UGR
12° 23° 38°	COB	>90	< 10

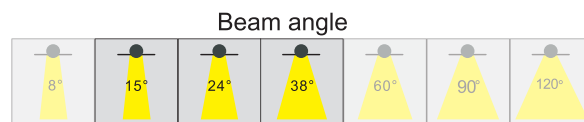

LED TRACK LIGHT SERIES

Simple and elegant designed led track light with high quality aluminum body, with multiple reflecting angles, specially designed heatsink with excellent dissipation to minimize degradation of the lumens.

Application: fashion stores, chain store, shopping mall, showrooms, art galleries.





90 degree Adjust up and down




355 degree Adjust Horizontal rotation



Glare cut angle of 20 degree



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



Selected reflector




+
Symmetric optics



General Lighting



+
Asymmetric optics





Wall washer




Reflector color option



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**
Engineering your idea



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

DU4045 SERIES



Reflector color option



DU4045-35

Max.35W

Operating Temp. : -30°C + 40°C

32W COB chip (DC850mA)



- 2700K/2450lm CRI90
- 3000K/2730lm CRI90
- 4000K/3080lm CRI80
- 5000K/3360lm CRI80

Internal Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali

Beam angle



Reflector color option



DU4045-24

Max.24W

Operating Temp. : -30°C + 40°C


24W COB chip (DC600mA)

- 2700K/1750lm CRI90
- 3000K/1950lm CRI90
- 4000K/2200lm CRI80
- 5000K/2340lm CRI80



Internal Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: 0~10v/Triac/Dali



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
ATCI TRIDONIC



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX, **CREE**, **SHARP**, **SAMSUNG**

DU4045 SERIES



DU4045-10

Max.10W

Operating Temp. : -30°C + 40°C

10W COB chip (DC250mA)




- 2700K/700lm CRI90
- 3000K/800lm CRI90
- 4000K/930lm CRI80
- 5000K/1020lm CRI80

Internal Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali

Reflector color option

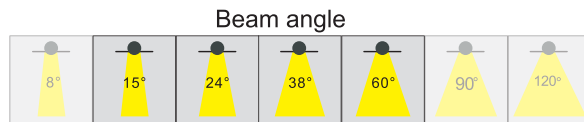

Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



90 degree Adjust up and down



355 degree Adjust Horizontal rotation



Glare cut angle of 20 degree



Anti-glare holder



LED TRACK LIGHT SERIES

Simple and elegant designed led track light with high quality aluminum body, with multiple reflecting angles, specially designed heatsink with excellent dissipation to minimize degradation of the lumens.

Application: fashion stores, chain store, shopping mall, showrooms, art galleries.

Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC

DU4046 SERIES



DU4046-40

Max. 40W

Operating Temp. : -30°C + 40°C


40W COB chip (DC1000mA)

- 2700K/3000lm CRI90
- 3000K/3200lm CRI90
- 4000K/3280lm CRI80
- 5000K/3400lm CRI80


Internal Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali



Beam angle



DU4046-20

Max. 20W

Operating Temp. : -30°C + 40°C


20W COB chip (DC500mA)

- 2700K/1500lm CRI90
- 3000K/1600lm CRI90
- 4000K/1640lm CRI80
- 5000K/1700lm CRI80



Internal Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac/Dali




Beam angle




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC

LED Drivers - PHILIPS **GTI**



LED Chips - PHILIPS CITIZEN

BRIDGELUX, CREE, SHARP, SAMSUNG

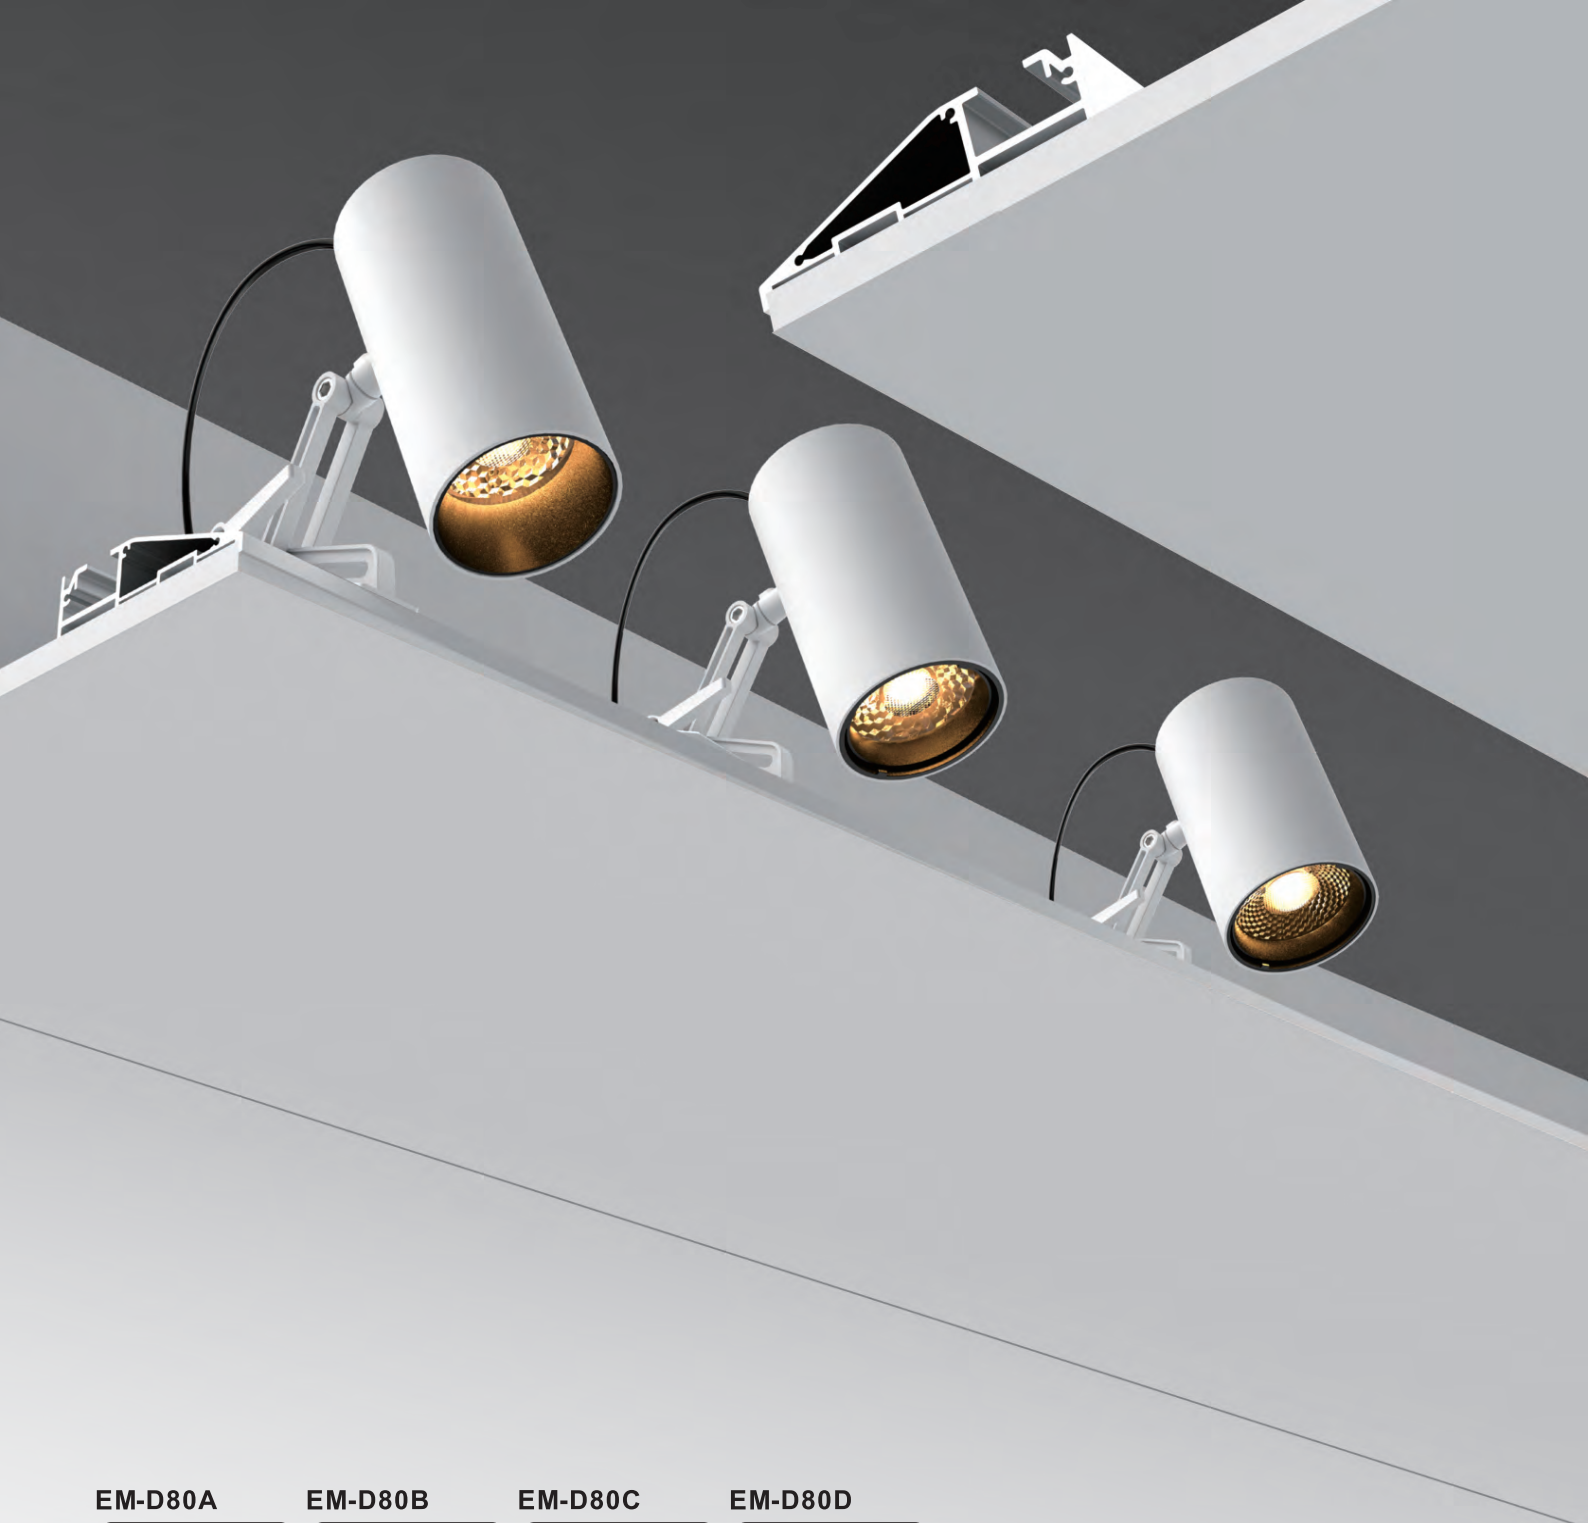

EM-D80A



EM-D80B



EM-D80C



EM-D80D



Side Mounted Spot Tracklight :


High-end series of Spot lamps --specially designed for high-end locations, side mounted channel installed to make decoration simple and more stylish & extravagant, brands and luxury store designers' first choice of products




Side mounted ceiling installed details



Space Size for installing
Take FS4037-30W for example as below

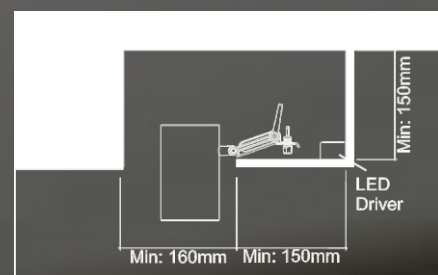

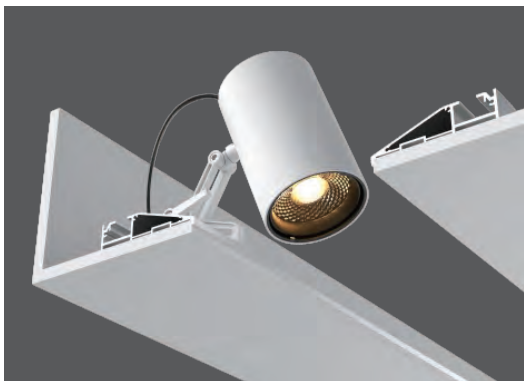

DU4037-30

Max.30W

Operating Temp. : -30°C + 40°C



26W COB chip (DC700mA)

- 2700K/2100lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI80
- 5000K/2943lm CRI70


Remote Driver: AC220-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac



Beam angle



Color selection



DU4037-20

Max.20W

Operating Temp. : -30°C + 40°C



18.5W COB chip (DC500mA)

- 2700K/1400lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70


Remote Driver: AC220-240V 50/60Hz

Driver performance: Non-dimmable/dimmable



Dimmer: DALI/0~10v/Triac




Beam angle




Color selection



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
ATCI TRIDONIC



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

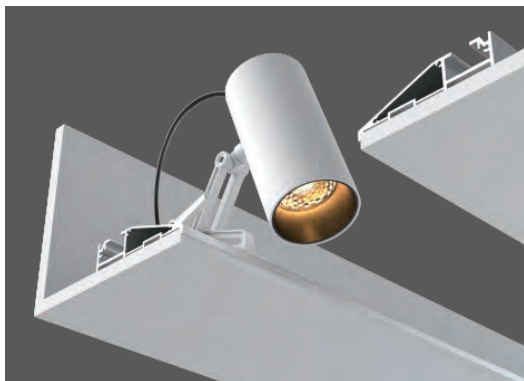

DU4037-15

Max. 15W

Operating Temp. : -30°C + 40°C


13.5W COB chip (DC350mA)

- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1390lm CRI80
- 5000K/1580lm CRI70


Remote Driver: AC220-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

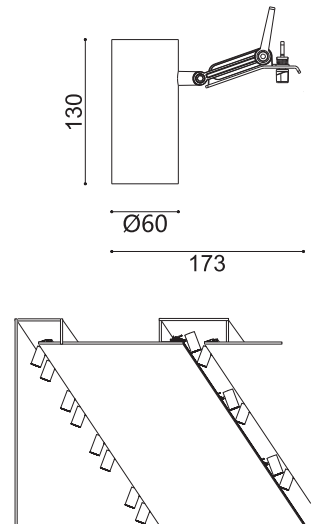


Beam angle




Color selection



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - **PHILIPS** **GTI**
MTI **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**

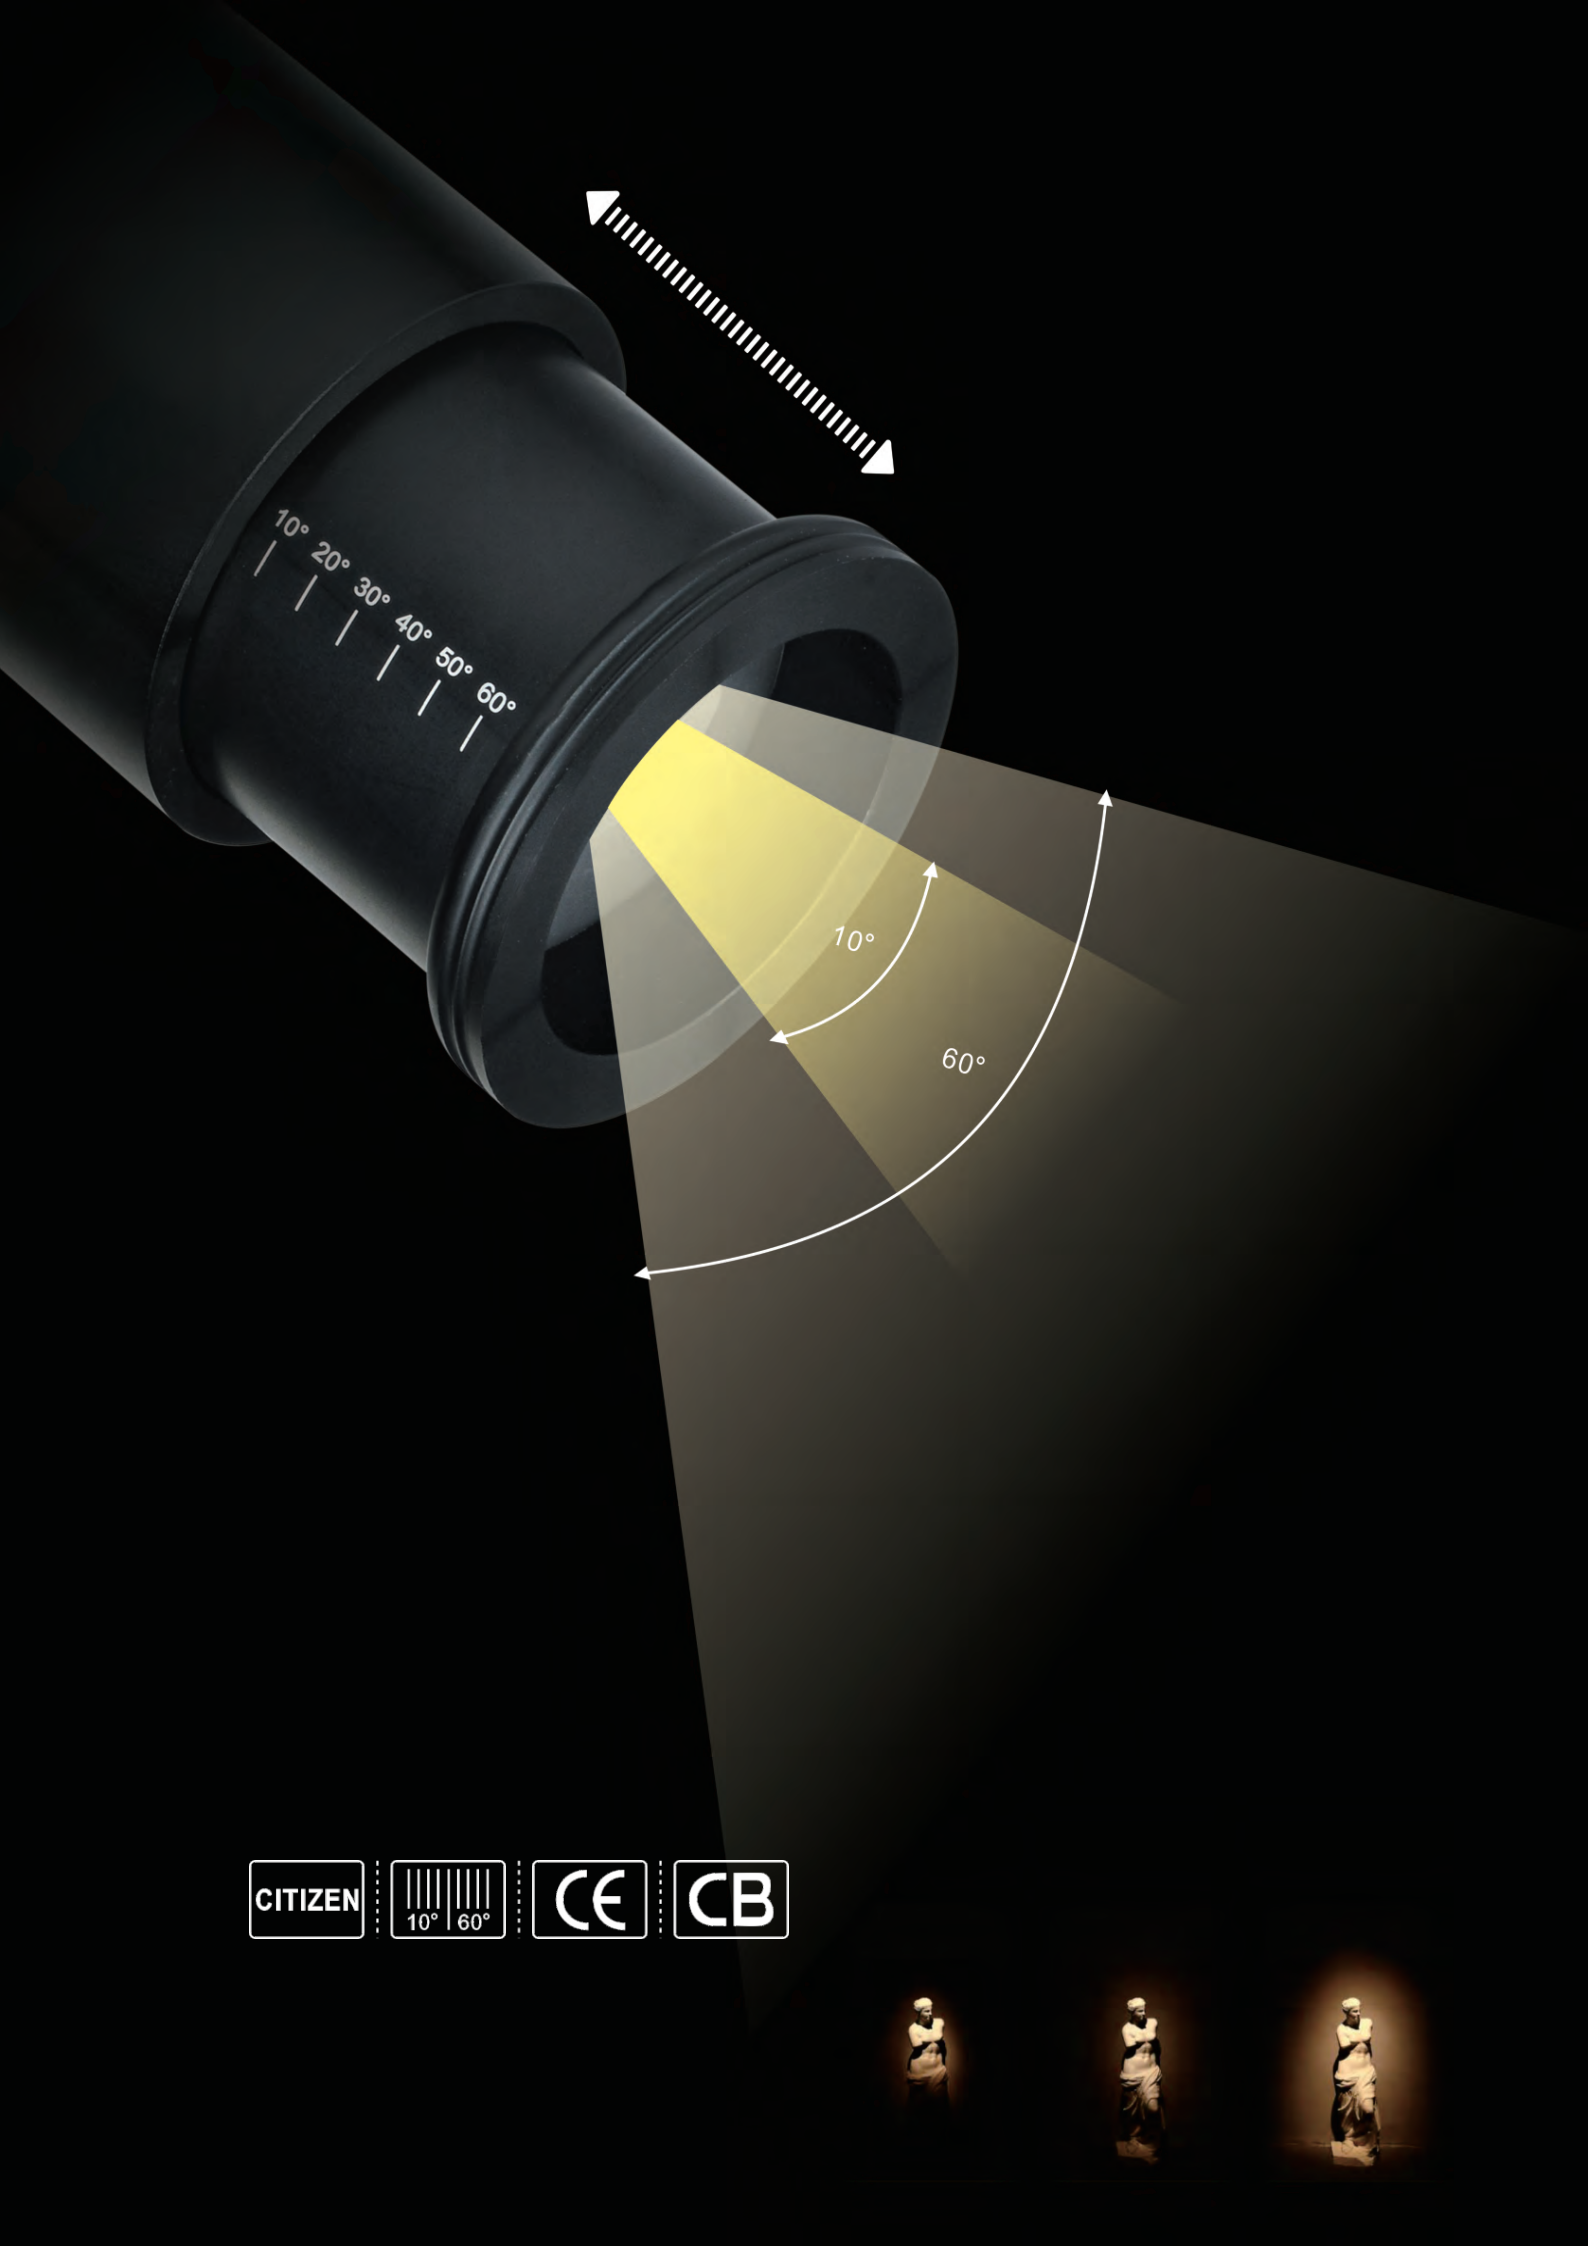

CITIZEN



DU4020-20

Max.20W

Operating Temp. : -30°C + 40°C

18W COB chip (DC500mA)

■ 2700K/1300lm CRI90


■ 3000K/1400lm CRI90

■ 4000K/1850lm CRI90


Inbuilt Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer:Dali/ 0-10V/Traic




Color selection

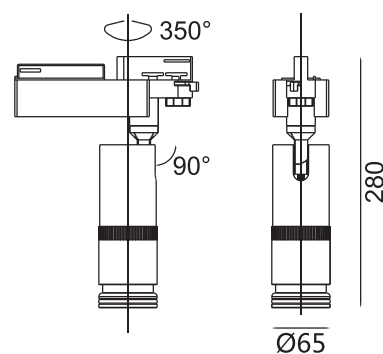



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
BRIDGELUX, CREE, SHARP, SAMSUNG




LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE, SHARP, SAMSUNG

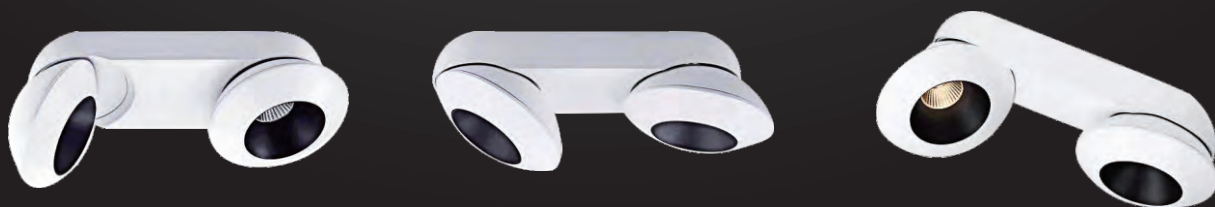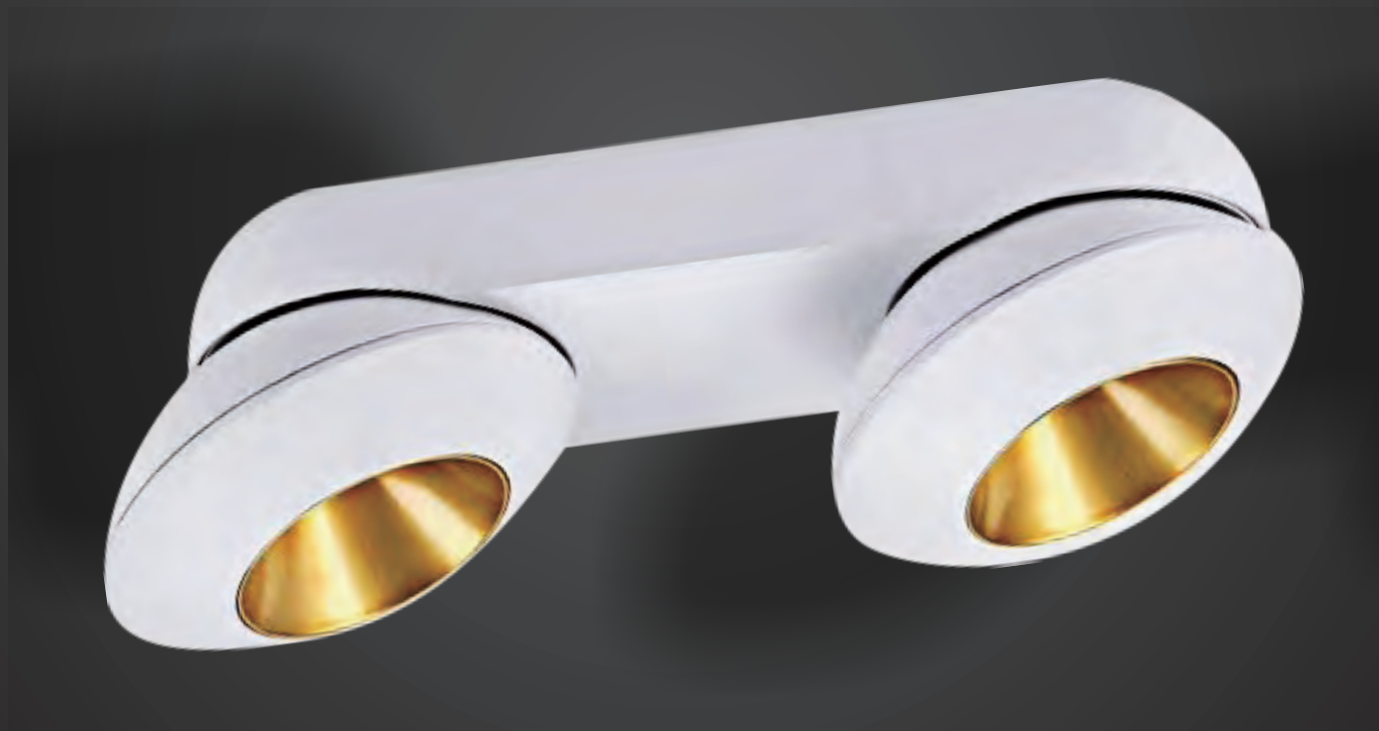

DU-0701BR




LAMP	LED POWER	FLUX	CCT	CRI	SYSTEM POWER	DRIVER
BXRA-30E0800-B	15W	1553 lm	3000K	90	18W	HEP-LMC15W700-Z




MATERIAL COLOUR



Beam angle




ACCESSORIES

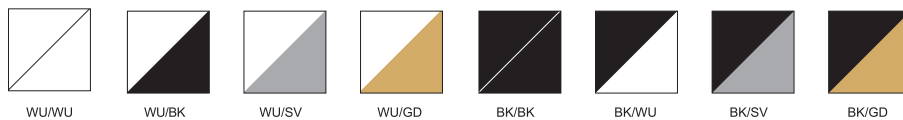


DU-0711BR



LAMP	LED POWER	FLUX	CCT	CRI	SYSTEM POWER	DRIVER
BXRA-30E0800-B	2X15W	3106 lm	3000K	90	34W	HEP-LCC30W700




Beam angle





MATERIAL COLOUR



Beam angle





ACCESSORIES







Sydney

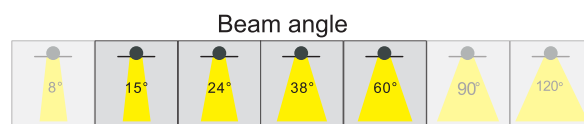


Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**




LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE SHARP SAMSUNG




The exquisite electroplating surface treatment art, using the unique nano dust - proof technology, the reflector surface has long been like new, it is also wear-resistant and anti-hard scratches.



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**


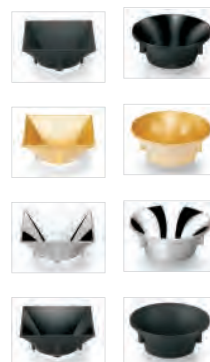


Product parameters


Model	Power	Beam angle
DU08610W-R	10W	17°/25°/36°/60°
DU08610W-S	10W	17°/25°/36°/60°
DU08715W-R	15W	17°/25°/36°/60°
DU08715W-S	15W	17°/25°/36°/60°

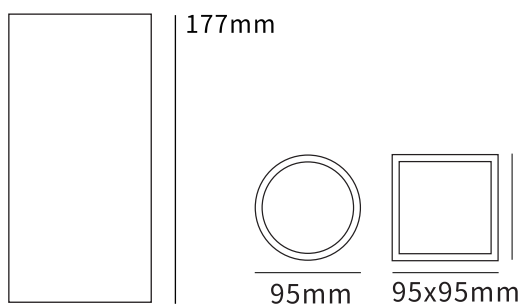



Light source	CRI	IP Grade	Input Voltage	Dimmable
CITIZEN	90	20	AC220-240V	0-10V/DALI/Triac

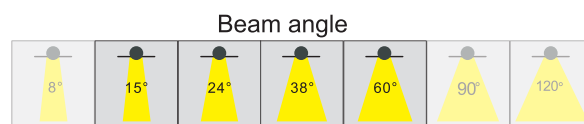

Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
BRIDGELUX, **ATCI** TRIDONIC




LED Chips - PHILIPS CITIZEN
BRIDGELUX, CREE SHARP SAMSUNG




Product parameters


Model	Power	Beam angle
DU08815W-R	15W	17°/25°/36°/60°
DU08815W-S	15W	17°/25°/36°/60°
DU08920W-R	20W	17°/25°/36°/60°
DU08920W-S	20W	17°/25°/36°/60°
DU09025W-R	25W	17°/25°/36°/60°
DU09025W-S	25W	17°/25°/36°/60°



188mm





135mm




135x135mm


Light source	CRI	IP Grade	Input Voltage	Dimmable
CITIZEN	90	20	AC220-240V	0-10V/DALI/Triac

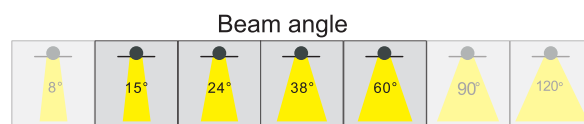

Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC
LED Drivers - PHILIPS **GTI**
WU **GTI** **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**


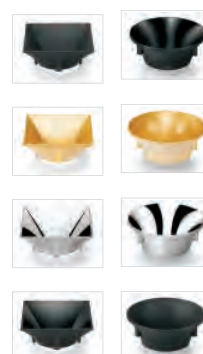


Product parameters

Model	Power	Beam angle
DU09125W-R	25W	17°/25°/36°/60°
DU09125W-S	25W	17°/25°/36°/60°
DU09230W-R	30W	17°/25°/36°/60°
DU09230W-S	30W	17°/25°/36°/60°
DU09335W-R	35W	17°/25°/36°/60°
DU09335W-S	35W	17°/25°/36°/60°

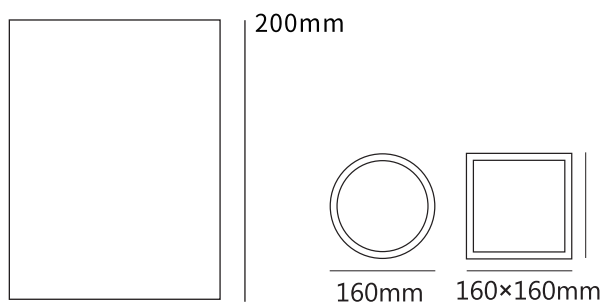

Light source	CRI	IP Grade	Input Voltage	Dimmable
CITIZEN	90	20	AC220-240V	0-10V/DALI/Triac

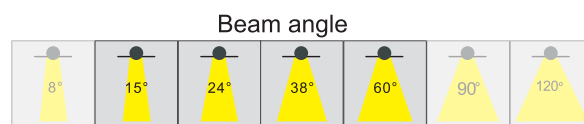

Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC
LED Drivers - PHILIPS **GTI**
WU **ATCI** **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**
BRIDGELUX **CREE** **SHARP** **SAMSUNG**



BOSS
HUGO BOSS






Product parameters

Model	Power	Size (DxH)	Cut out	Lighting direction
DUF-S83 07	7W	83*83*105mm	/	Fixed
DUF-WS8312	12W	83*83*105mm	/	Fixed


Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<10



Product parameters

Model	Power	Size (DxH)	Cut out	Lighting direction
DUW-S83 07	7W	83*83*105mm	/	Wall washer
DUW-WS83 12	12W	83*83*105mm	/	Wall washer


Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<10




Product parameters

Model	Power	Size (DxH)	Cut out	Lighting direction
DUS-L159 14	2*7W	159*83*105mm	/	Fixed
DUS-L159 24	2*12W	159*83*105mm	/	Fixed

Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<10

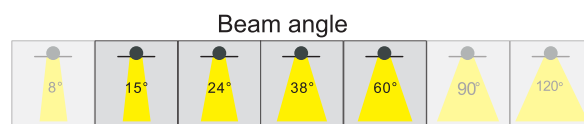






Product parameters

Model	Power	Size (DxH)	Cut out	Lighting direction
DUF-R79 07	7W	Ø79*155mm	/	Fixed
DUF-R79 12	12W	Ø79*155mm	/	Fixed



Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<10



Product parameters

Model	Power	Size (DxH)	Cut out	Lighting direction
DUW-WR79 07	7W	Ø79*155mm	/	Wall washer
DUW-WR79 12	12W	Ø79*155mm	/	Wall washer

Beam angle	Light source	CRI	UGR
15° 24° 36°	COB	>90	<10

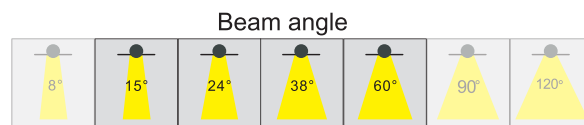

LED Ceiling

Cree LED ceiling light

Dimension

Diameter: 75mm Depth: 100mm

LED light source

LED wattage: 12w Lumen: 800lm

Lamp: CREE COB LED -3000K/4000K/5700K

Features

A fashion style ceiling downlight IP20 ,clean and attractive appearance can be decorative for the ceiling , come up with harmony atmosphere

- Built-in driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black w/ chrome finish



DUCREE001

Cree LED ceiling light

Dimension

Diameter: 75mm Depth: 92mm

LED light source

LED wattage: 12w Lumen: 800lm

Lamp: CREE COB LED -3000K/4000K/5700K

Features

A fashion style ceiling downlight IP20 ,integrated cylinder feature can beautify the ceiling , also create harmony atmosphere

- Built-in driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black w/ chrome finish



DUCREE002

Cree LED ceiling light

Dimension

Diameter: 85mm Depth: 85mm

LED light source

LED wattage: 12w Lumen: 1020lm

Lamp: CREE COB LED -3000K/4000K/5700K

Features

A decent style ceiling downlight,simple but delicate structure , decorative for the ceiling , come up with harmony atmosphere

- Built-in driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black



DUCREE003

Cree LED ceiling light

Dimension

Diameter: 75mm Depth: 94.5mm

LED light source

LED wattage: 12w Lumen: 800 lm

Lamp: CREE COB LED -3000K/4000K/5700K

Features

A decoration & functional ceiling downlight, rotatable design can reach the lighting solution easily, the colorful appearance can beautify ceiling

- Built-in driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black with chrome



DUCREE004

Cree LED ceiling light

Dimension

Diameter: 75mm Depth: 99.5mm

LED light source

LED wattage: 12w Lumen: 800lm

Lamp: CREE COB LED -3000K/4000K/5700K

Features

A decoration & functional ceiling downlight, rotatable design can reach the lighting solution easily, the colorful appearance can beautify ceiling

- Built-in driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black with chrome



DUCREE005

Cree LED ceiling light

Dimension

Diameter: 85mm Depth: 93mm
Diameter: 100mm Depth: 100mm

LED light source

LED wattage: 12w Lumen: 1020lm

LED wattage: 18w Lumen: 1620lm

Lamp: CREE COB LED -3000K/4000K/5700K


Features

A contemporary style ceiling downlight dynamic and rotatable design can help you reach the lighting solution easily,IP20

- Built-in driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black



DUCREE006

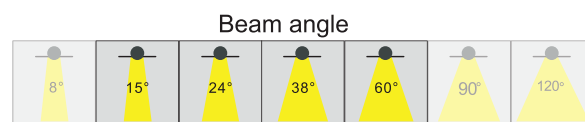

Cree LED track light

Dimension

Diameter: 85mm Depth: 120mm

Diameter: 100mm Depth: 130mm

LED light source

LED wattage: 12w Lumen: 1020lm

LED wattage: 18w Lumen: 1620lm

Lamp: CREE COB LED -3000K/4000K/5700K



Features

A functional style track light IP20 , full direction
movable,emitting accurate focusing light

- Built-in driver
- CRI > Ra 80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Sand white /Sand black




DUCREE007

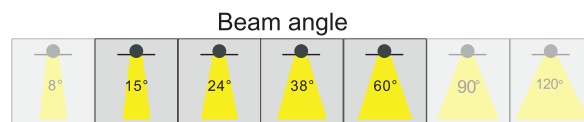






Model No: DU-TL5030	Surface Treatment: BK
Power: COB 30W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 3000Lm	Working Temperature: -10~45° C
CRI: ≥80	IP: 20
Beam Angle: 24°	Body Size: Φ83*115*145mm
Color Temperature: 6500/4000/3000K	Hole Size: /






DU-TL5030

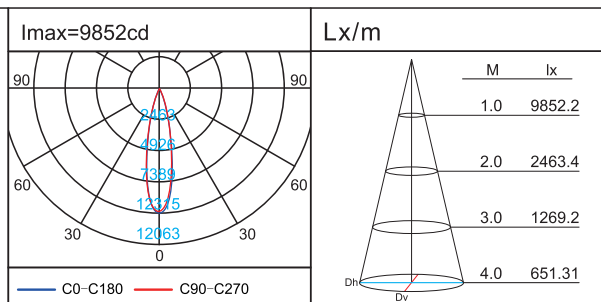

Model No: DU-TL4430	Surface Treatment: BK
Power: COB 30W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 2200Lm	Working Temperature: -10~45° C
CRI: ≥85	IP: 20
Beam Angle: 15-60°	Body Size: Φ79*155*170mm
Color Temperature: 6500/4000/3000K	Hole Size: /




DU-TL4430

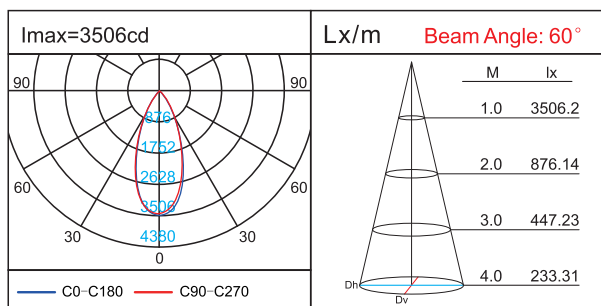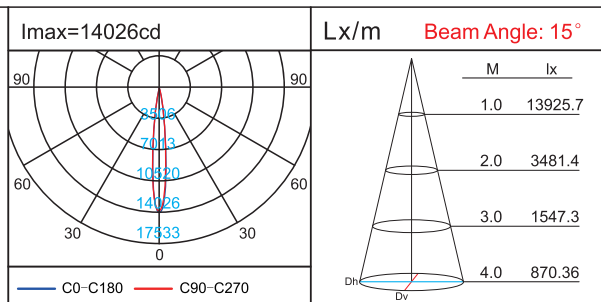





Model No: DU-TL6530	Surface Treatment: WH/BK
Power: COB 30W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 3100Lm	Working Temperature: -10~45° C
CRt: ≥80	IP: 20
Beam Angle: 24°	Body Size: Φ81*129*173mm
Color Temperature: 6500/4000/3000K	Hole Size: /




DU-TL6530



Imax=10052cd




Lx/m




— C0-C180 — C90-C270



Model No: DU-TL4530	Surface Treatment: WH/BK
Power: COB 30W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 2800Lm	Working Temperature: -10~45° C
CRt: ≥85	IP: 20
Beam Angle: 24°	Body Size: Φ86*122*172mm
Color Temperature: 6500/4000/3000K	Hole Size: /




Model No: DU-P5520S-A/B	Surface Treatment: WH
Power: SMD 20W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1800Lm	Working Temperature: -10~50° C
CRt: ≥80	IP: 20
Beam Angle: 110°	Body Size: 415*148*59mm
Color Temperature: 6500/4000/3000K	Hole Size: /







Model No: DU-TL3850	Surface Treatment: WH/BK
Power: COB 50W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass+PC
Luminous Flux: 5000Lm	Working Temperature: -10~45° C
CRt: ≥80	IP: 20
Beam Angle: 28°	Body Size: $\phi 105 \times 147 \times 235$ mm
Color Temperature: 6500/4000/3000K	Hole Size: /




DU-TL3850




Imax=9278cd




Lx/m




Model No: DU-TL4930	Surface Treatment: WH/BK
Power: COB 30W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 2700Lm	Working Temperature: -10~45° C
CRt: ≥80	IP: 20
Beam Angle: 18°	Body Size: $\phi 90 \times 140 \times 170$ mm
Color Temperature: 6500/4000/3000K	Hole Size: /




DU-TL4930



Imax=14146cd



Lx/m







PRODUCT 2020 CATALOGUE

Sonnleithnergasse 2/4/44Wien 1100
Österreich
Vienna - Austril

Contact us:
T: +43 676 449 0575
E: info@deluxlight.eu