


# DELLUX LIGHTING



**Manufactured in Austria  
and China with *TRIDONIC* Technology**



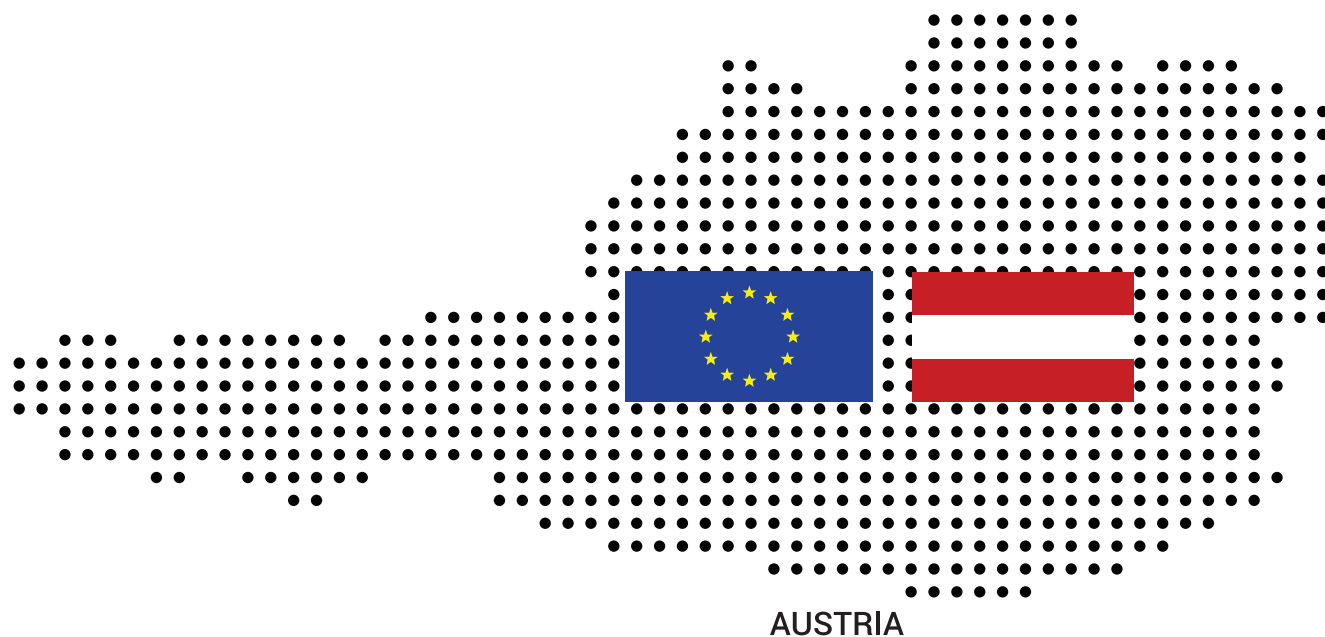

08-Wall & Step Lights  
42 Page

# WALL AND STEP LIGHTS


08







DU-WLT20808R

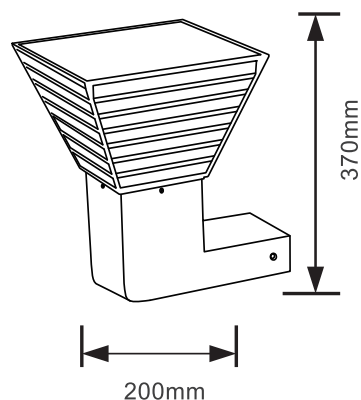

### describe


<b>Solar panel</b>	5W/5V
<b>Li-ion Battery</b>	3.2V 5AH
<b>CCT</b>	3000/6500K
<b>CRI</b>	≥ 90
<b>LED Type</b>	2835
<b>Material</b>	Aluminum+PC
<b>O.B MES</b>	540*460*320mm
<b>Warranty</b>	2year
<b>Life Span</b>	25000H
<b>Working mode</b>	Optical control

### design philosophy

- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection




Model NO.	CharingTime	Working Time	Body Size
DU-WLT20808R	4-6Hrs	>12Hrs	200**200*H370mm





DU2502





Straight lines integrated in a classic design. Vintage style combining traditional design elements and modern LED technology.




CLASS I  $\text{CE}$   
IP44  
LED 11W   
Die Cast Aluminum

A<sup>+</sup>




h(m)	Eavg(lx)	Emax(lx)	D(m)
1	500.6	721.5	0.58
2	125.2	180.4	1.15
3	55.62	80.16	1.73
4	31.29	45.09	2.30
5	20.02	28.86	2.88

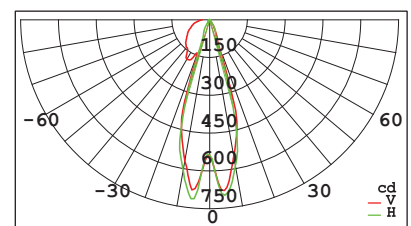

Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC


LED Drivers - PHILIPS



LED Chips - PHILIPS



DU-WLT20908R

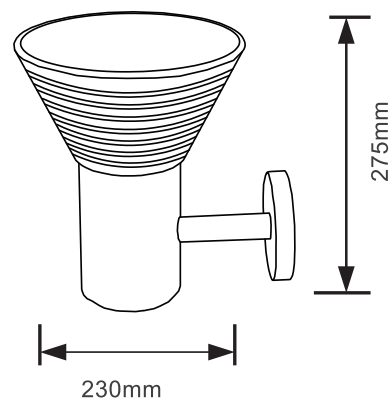


### describe


<b>Solar panel</b>	5W/5V
<b>Li-ion Battery</b>	3.2V 5AH
<b>CCT</b>	3000/6500K
<b>CRI</b>	≥ 90
<b>LED Type</b>	2835
<b>Material</b>	Aluminum+PC
<b>O.B MES</b>	620*520*320mm
<b>Warranty</b>	2year
<b>Life Span</b>	25000H
<b>Working mode</b>	Optical control

### design philosophy

- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection

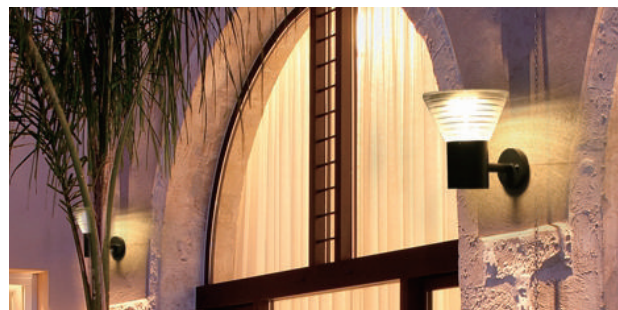


Model NO.	CharingTime	Working Time	Body Size
DU-WLT20908R	4-6Hrs	>12Hrs	Φ230*H275mm





DU-WLT20708R

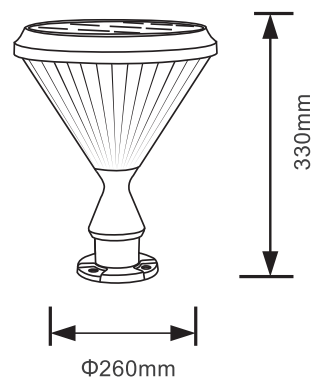

### describe


<b>Solar panel</b>	4.2W/5V
<b>Li-ion Battery</b>	3.2V 8AH
<b>CCT</b>	3000/6500K
<b>CRI</b>	≥ 90
<b>LED Type</b>	2835
<b>Material</b>	Aluminum+PC
<b>O.B MES</b>	570*570*400mm
<b>Warranty</b>	2year
<b>Life Span</b>	25000H
<b>Working mode</b>	Optical control

### design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Model NO.	CharingTime	Working Time	Body Size
DU-WLT20708R	4-6Hrs	>12Hrs	Φ260*H330mm




Optional Integrated Dimmable Driver / 1-10 / DMX / DALI / TRIAC  
LED Drivers - **PHILIPS** **GTI**  
**MW** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**






### describe

<b>Solar panel</b>	4.2W/5V
<b>Li-ion Battery</b>	3.2V 8AH
<b>CCT</b>	3000/6500K
<b>CRI</b>	≥70
<b>LED Type</b>	2835
<b>Material</b>	Aluminum+PC
<b>O.B MES</b>	760*620*370mm
<b>P/C</b>	4 PCS
<b>Warranty</b>	2year
<b>Life Span</b>	25000H
<b>Working mode</b>	Optical control

### design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection

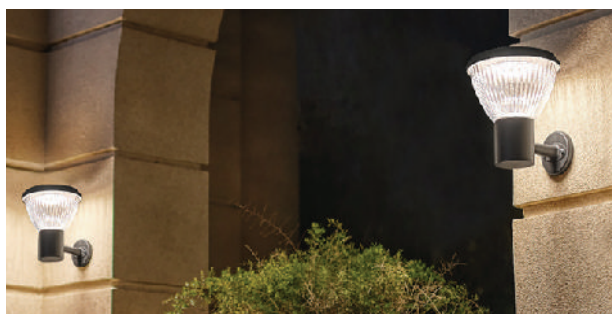


Model NO.	CharingTime	Working Time	Body Size
DU-WLT21008R	4-6Hrs	>12Hrs	Φ260*H310mm




Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
LED Drivers - **PHILIPS** **ETI**  
**MW** **ATCI** **TRIDONIC**



### Beam angle



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**

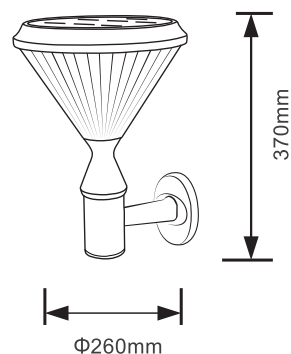

DU-WLT20608R



**describe**

<b>Solar panel</b>	4. 2W/5V
<b>Li-ion Battery</b>	3.2V 8AH
<b>CCT</b>	3000/6500K
<b>CRI</b>	≥ 90
<b>LED Type</b>	2835
<b>Material</b>	Aluminum+PC
<b>O.B MES</b>	620*560*450mm
<b>Warranty</b>	2year
<b>Life Span</b>	25000H

Model NO.	CharingTime	Working Time	Body Size
DU-WLT20608R	4-6Hrs	>12Hrs	Φ260*H370mm

## design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE SHARP SAMSUNG



DU-WLT0108S

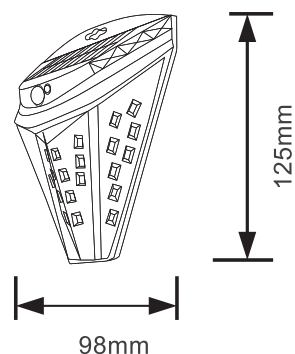

### describe

CharingTime	6-8Hrs
Working Time	12Hrs
CCT	3000/6500K
CRI	≥ 90
LED Type	SMD
Material	ABS+PC
O.B MES	610*340*530 mm
Warranty	2year
Life Span	25000H
Working mode	PIR sensor+ CDS Night sensor

### design philosophy



- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection



Model NO.	Solar panel	Li-ion Battery	Body Size
DU-WLT0108S	0.8W/5.5V	3.2V 2000mAH	98*125*50mm





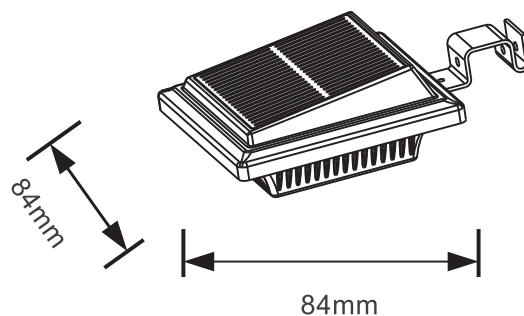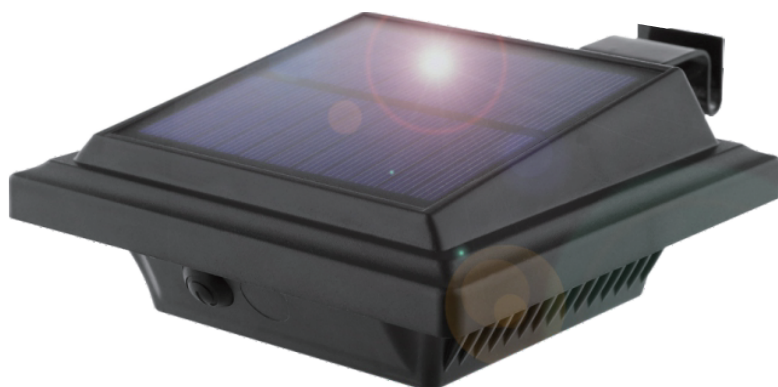

DU-WLT0605S

### describe



CharingTime	6-8Hrs
Working Time	12Hrs
CCT	3000/6500K
CRI	≥ 90
LED Type	SMD
Material	ABS
O.B MES	695*425*250mm
Warranty	2year
Life Span	25000H
Working mode	Optical Control

### design philosophy


- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection




Model NO.	Solar panel	Li-ion Battery	Body Size
DU-WLT0605S	0.8W/5.5V	3.2V 1200mAH	84*84mm

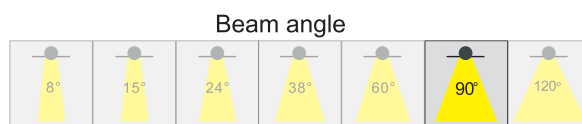


Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC  
LED Drivers - PHILIPS  
CREE  
BRIDGELUX  
SAMSUNG



LED Chips - PHILIPS CITIZEN  
BRIDGELUX CREE SHARP SAMSUNG

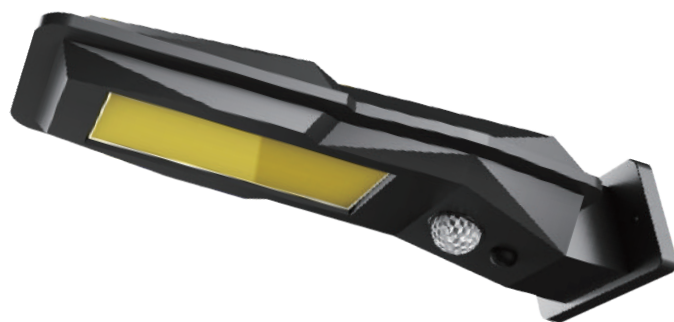

DU-WLT0520S

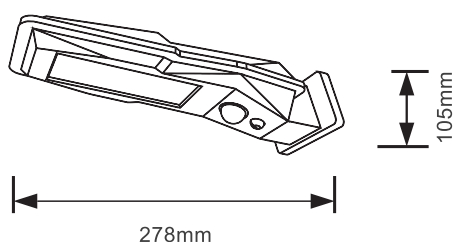


### describe


CharingTime	6-8Hrs
Working Time	12Hrs
CCT	3000/6500K
CRI	≥ 90
LED Type	SMD
Material	ABS
O.B MES	710*440*300mm
Warranty	2year
Life Span	25000H
Working mode	PIR sensor+ CDS Night sensor

### design philosophy

- Ultra-bright LED light source, intelligent charge and discharge control system.
- No need wiring, PWM AC power supply, no electricity charges.
- Good stability, long life and high luminous efficiency
- Easy installation and maintenance, high safety performance,
- energy saving and environmental protection

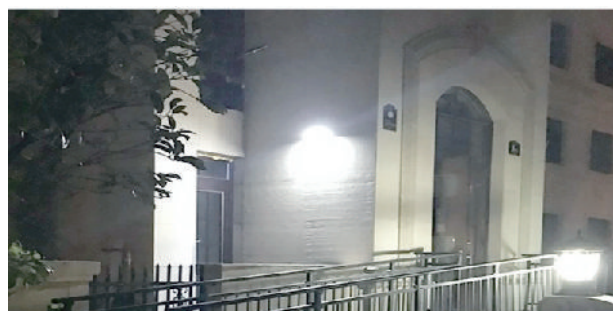


Model NO.	Solar panel	Li-ion Battery	Body Size
DU-WLT0520S	0.8W/5.5V	3.2V 2400mAH	278*68*105mm




Beam angle



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**MW** **ATCI** **TRIDONIC**





LED Chips - PHILIPS CITIZEN  
BRIDGELUX. CREE SHARP SAMSUNG




DU1895

CLASS I CE  
IP44  
LED 30W  
Die Cast Aluminum

The almost invisible "Stealth" form of this amazing wall light, houses a super powerful LED light-engine radiating a diffuse light. Best used at a certain height to light larger surfaces.



h(m)	Eavg(lx)	Emax(lx)	D(m)
1	155.1	651.5	3.56
2	38.77	162.9	7.11
3	17.23	72.39	10.7
4	9.692	40.72	14.2
5	6.203	26.06	17.8

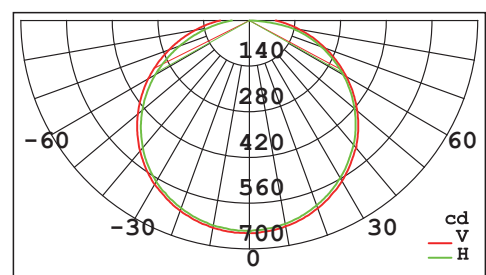

Optional Integrated Dimmable Driver / 1-10V/DIM/DALI/TRIAC

LED Drivers - PHILIPS **GTI**  
BRIDGELUX, CREE, TRIDONIC



LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE, SHARP, SAMSUNG



DU-WL18420R-D

### Describe



LED wall lamp, round PP shell lamp body; Plastic masks; The outgoing line of the lamp body adopts waterproof apron and waterproof plastic kaise joint to fix waterproof and anti-pull; Iron plated nickel mounting panel; Built-in constant current non-isolated drive (the bottom is fixed with adhesive)

- ① **Applicable working environment:** Parking lot/walkway/ceiling/ stairwell wall/hospital wall/workshop wall
- ② **Surface treatment:** Black / White


Model NO.	Power	Voltage	Luminous	Body Size
DU-WL18420R-D	24W	AC220-240V	≥2000lm	Φ225*66mm

### Design philosophy


LED circular wall lamp, suitable for a variety of occasions, widely used in parking lot/walkway/ ceiling/stairwell wall/hospital wall/workshop wall and so on, energy-saving and durable.

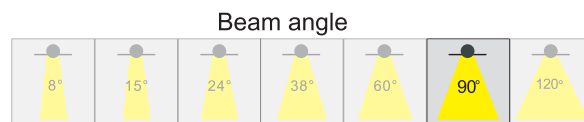


Optional Integrated Dimmable Driver / 1-10V DMX/DALI/TRIAC  
LED Drivers - **PHILIPS** **ETI**  
**MW** **ATCI** **TRIDONIC**




LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**




DU3491L




DU3491S




DU3481L




DU3481S




DU3501L





DU3501S



Compact & elegant fixture producing a perfect uniform and homogenous warm white LED light without any shadow. Easy access to the connection part by removing click-on front plate.




CLASS I   
IP54  
LED 11W   
Die Cast Aluminum  
**A+**





CLASS I   
IP54  
LED 6.3W   
Die Cast Aluminum  
**A+**

h(m)	Eavg(lx)	Emax(lx)	D(m)
1	52.30	182.2	3.07
2	13.08	45.56	6.13
3	5.812	20.25	9.20
4	3.269	11.39	12.3
5	2.092	7.289	15.3




h(m)	Eavg(lx)	Emax(lx)	D(m)
1	25.58	89.70	3.01
2	6.395	22.43	6.02
3	2.842	9.967	9.02
4	1.599	5.606	12.0
5	1.023	3.588	15.0




Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC

LED Drivers - PHILIPS




LED Chips - PHILIPS   
BRIDGELUX, CREE




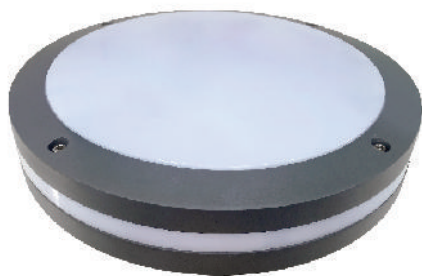


DU-WL9824R-A

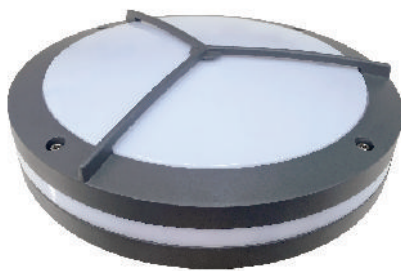

DU-WL9824R-B

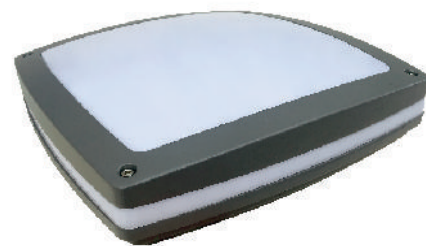

DU-WL9824S-A

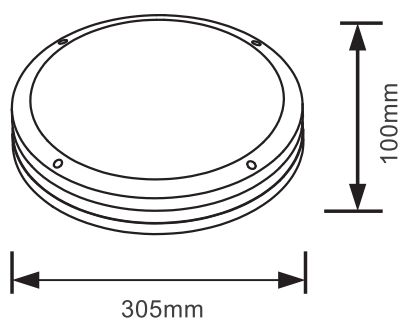

### Describe

Die-cast aluminum bottom shell and face ring; A round opal plastic light distributor is used between the bottom shell and the face ring. The surface ring and the bottom shell surface are sprayed with powder and the dark gray outlet line is fixed with black plastic press wire buckle to prevent tension. I C constant current isolated driver:


- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Grey

### Design philosophy


LED small bread series, often versatile, suitable for a variety of occasions, energy-saving and durable.



Model NO.	Power	Voltage	Luminous	Body Size
DU-WL9824R-A	24W	AC100-240V	500lm	Φ305*100mm
DU-WL9824R-B	24W	AC100-240V	500lm	Φ305*100mm
DU-WL9824S-A	24W	AC100-240V	500lm	300*300*90mm



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
CUP LM 110  
SYS LM 90  
RoHS  
CE  
TRIDONIC



LED Chips - PHILIPS CITIZEN  
BRIDGELUX. CREE SHARP SAMSUNG



### Describe

Die-casting aluminum lamp body powder spraying technology, plastic transparent sheet, built-in glue constant current isolation waterproof drive;


- ① **Material:** Aluminum+Acrylic
- ② **Optical lens:** PC lens
- ③ **Applicable working environment:** suitable for more scenarios and occasions.
- ④ **Surface treatment:** Black

### Design philosophy


LED outdoor three wall lamp, using die - casting aluminum lamp body powder spraying process, plastic pervious to light, more simple cross mesh.



Model NO.	Power	Voltage	Luminous	Body Size
DU-WL16710R	10W	AC220-240V	≥420lm	274*183*88mm
DU-WL16710S	10W	AC220-240V	≥420lm	274*183*88mm




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
CREE TRIDONIC




LED Chips - PHILIPS CITIZEN  
BRIDGELUX. CREE SHARP SAMSUNG




DU3381  
DU3381 gr



DU3382  
DU3382 gr



DU3383 gr



Robust heavy duty die-cast aluminium fixture. This large model with two traditional E27 fittings, is suitable for energy saving bulbs of up to 20W offering a very powerful light output. The soft glowing light effect to the back creates a "floating" impression. Ideal for creating a safe atmosphere around your home at night.




CLASS I CE

IP54

E27 2\*20W CFL

Die Cast Aluminum




CLASS I CE

IP54

E27 2\*20W CFL

Die Cast Aluminum





CLASS I CE


IP54

E27 2\*20W CFL


Die Cast Aluminum




h(m)	Eavg(lx)	Emax(lx)	D(m)
1	42.46	130.5	2.73
2	10.62	32.63	5.46
3	4.718	14.5	8.2
4	2.654	8.158	10.9
5	1.698	5.221	13.7



h(m)	Eavg(lx)	Emax(lx)	D(m)
1	44.58	156	3.02
2	11.14	39.01	6.04
3	4.953	17.34	9.06
4	2.786	9.752	12.1
5	1.783	1	15.1



h(m)	Eavg(lx)	Emax(lx)	D(m)
1	39.75	130.5	29.5
2	9.939	32.62	5.9
3	4.417	14.5	8.85
4	2.485	8.155	11.8
5	1.59	5.219	14.8




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC

LED Drivers - PHILIPS

LED Drivers - CREE

LED Drivers - SAMSUNG



LED Chips - PHILIPS

LED Chips - CREE

LED Chips - SAMSUNG

LED Chips - SHARP

LED Chips - BRIDGELUX






DU-WL16603R-2



DU-WL16603R-4



### Describe



Round die-cast aluminum lamp body with powder sprayed on the surface; Light distribution device clear light transparent glass convex lens, white plastic round reflective cup; Round aluminum driving bottom cover, with a layer of insulating paper and three screws to lock and fix the lamp body. Built-in constant current isolation drive.

- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Black / White

Model NO.	Power	Voltage	Luminous	Body Size
DU-WL16603R-2	2*3W	AC220-240V	≥420lm	Φ111*92mm
DU-WL16603R-4	4*3W	AC220-240V	≥950lm	Φ111*92mm



### Design philosophy

Circular creative background wall decorative wall lamp, using glass convex optical lens, good light effect, can be luminous at both ends can be four hair light, suitable for indoor and outdoor.

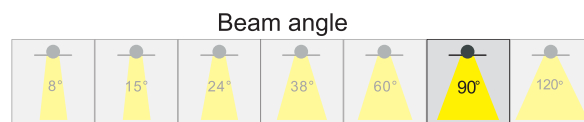





DU1891M

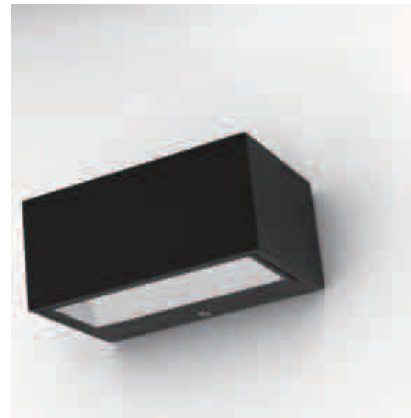

DU1891S




Minimalistic design but great in light output. This elegant “brick” light in anthracite aluminum radiates a perfect bi-directional beam. The medium version is very convenient for an installation on a certain height. Thanks to the light output of more than 1200 lumen, the light beam will cover the full surface in the two directions.

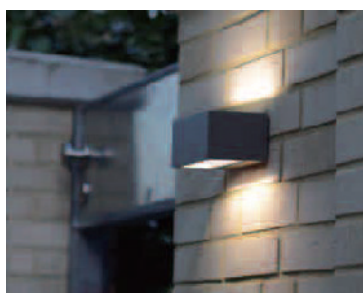


CLASS I  $\text{CE}$   
IP54  
LED 20W   
Die Cast Aluminum

A<sup>+</sup>






CLASS I  $\text{CE}$   
IP54  
LED 9W   
Die Cast Aluminum

A<sup>+</sup>




h(m)	Eavg(lx)	Emax(lx)	D(m)
1	3.919	13.64	4.28
2	0.9797	3.411	8.55
3	0.4354	1.516	12.8
4	0.2449	0.8527	17.1
5	0.1567	0.5458	21.4

h(m)	Eavg(lx)	Emax(lx)	D(m)
1	1.676	4.894	3.99
2	0.4189	1.224	7.99
3	0.1862	0.5438	12
4	0.1047	0.3059	16
5	0.067	0.1958	20

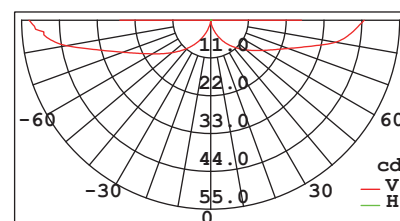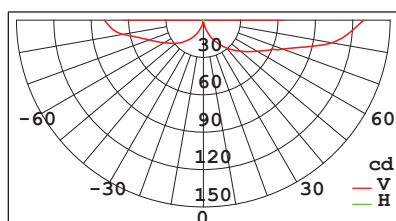


Optional Integrated Dimmable Driver / 1-10V/DIM/DALI/TRIAC

LED Drivers - PHILIPS



LED Chips - PHILIPS

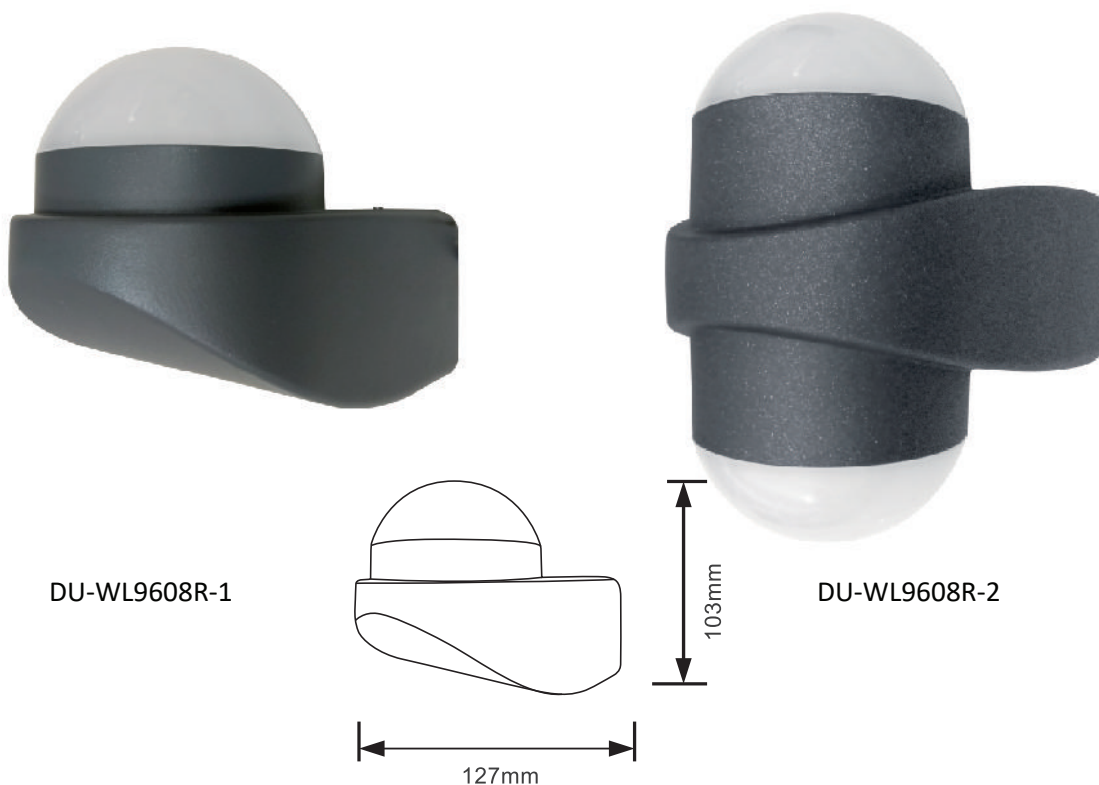

### Describe

Gray aluminum lamp body, PC milky white semicircle lampshade lamp glue fixed; Built-in plug - out glue isolated constant current drive.

### Design philosophy

PC milky white semicircle LED wall lamp, dynamic appearance, even light.


① **Applicable working environment:** suitable for more scenarios and occasions.

② **Surface treatment:** Grey

Model NO.	Power	Voltage	Luminous	Body Size
DU-WL9608R-1	8W	AC220-240V	650lm	141*127*103mm
DU-WL9608R-2	8*2W	AC220-240V	975lm	140*125*170mm





Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - **PHILIPS** **ETI**  
**MW** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



DU-WL9006S-1

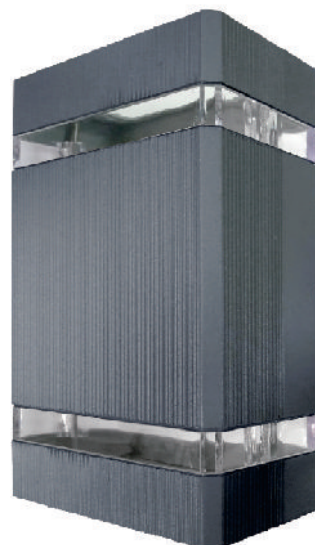

DU-WL9006S-2

### Describe

Die-cast aluminum shell and powder gray surface;  
Clear glass lamp shade;  
Isolated constant current drive.



- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Grey

### Design philosophy


Die - casting aluminum and light glass combined design, beautiful appearance, better light effect.



Model NO.	Power	Voltage	Luminous	Body Size
DU-WL9006S-1	6W	AC220-240V	280lm	110*90*117mm
DU-WL9006S-2	2*6W	AC220-240V	575lm	110*90*197mm



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **GTI**  
**MW** **GTI** **TRIDONIC**




LED Chips - PHILIPS CITIZEN  
BRIDGELUX. CREE SHARP SAMSUNG






DU-WL3803L

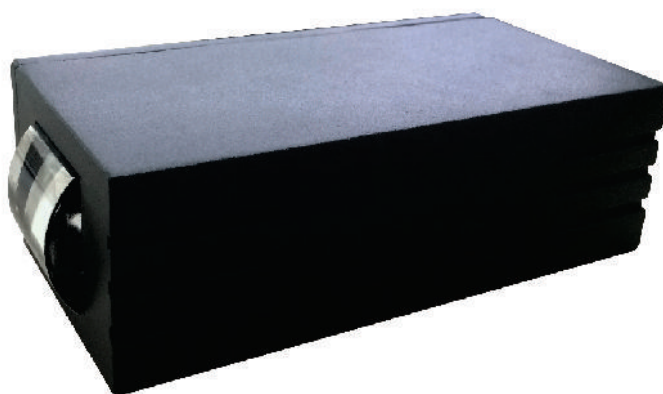

DU-WL3803L-2



### Describe



Long square box die-casting aluminum shell, dark gray powder sprayed on the surface or according to customer requirements, between the top cover and the bottom cover pad apron seal waterproof, installed at both ends of the bottom cover with hexagon screws fixed; One 3W high-power LED lamp bead at each end is fixed on the aluminum plate with screws, one end adopts a square plane glass lamp shade, the other end USES a square glass convex lens lamp shade;

- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Grey

Model NO.	Power	Voltage	Luminous	Body Size
DU-WL3803L	3W	AC220-240V	80lm	90*65*90mm
DU-WL3803L-2	2* 3W	AC220-240V	110lm	90*65*160mm

### Design philosophy


Adopt the box design technique, glass convex optical lens, good light effect, can single hair light/two ends of light, suitable for indoor and outdoor.

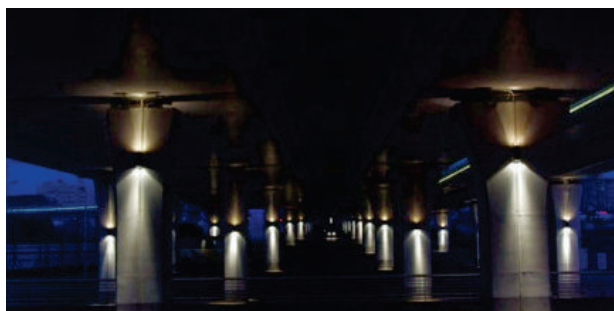



Beam angle



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - **PHILIPS** **ETI**  
**MW** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**

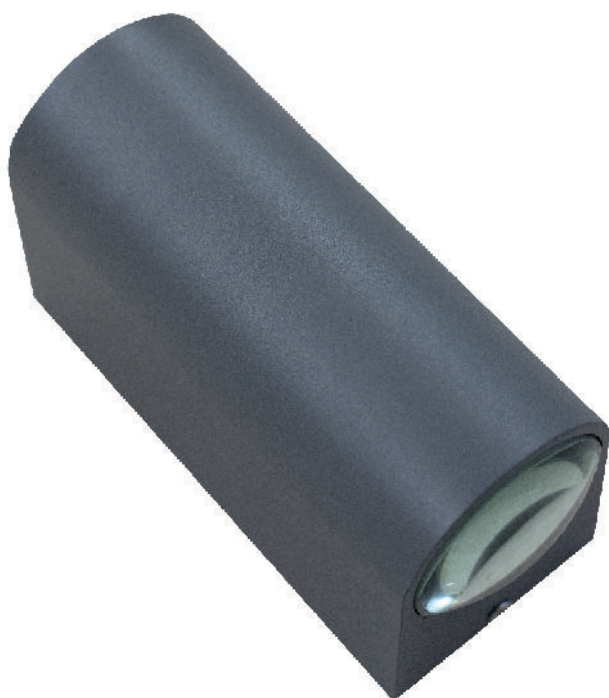

DU-WL3406C

### Describe



Die-cast aluminum Die-cast aluminum shell with black paint on the surface; Clear transparent glass mask, surrounded by black oil; Isolated constant current drive,

- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Grey


### Design philosophy

Nordic modern simple led wall lamp is suitable for bedside creative/courtyard/aisle lamp/balcony/ outdoor wall lamp.

Model NO.	Power	Voltage	Luminous	Body Size
DU-WL3406C	2* 3W	AC220-240V	≥700lm	175*68*92mm



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC  
LED Drivers - PHILIPS  
CUP LM 110  
SYS LM 90  
RoHS  
CE  
TRIDONIC



LED Chips - PHILIPS CITIZEN  
BRIDGELUX. CREE SHARP SAMSUNG




DU-WL9112S-1



DU-WL9112S-2



DU-WL9115C-2



### Describe

Die-cast aluminum shell with black paint on the surface;  
Clear transparent glass mask, surrounded by black oil;  
Isolated constant current drive,

### Design philosophy



Nordic modern simple led wall lamp is suitable for  
bedside creative/courtyard/aisle lamp/balcony/  
outdoor wall lamp.

① **Applicable working environment:** suitable for more scenarios and occasions.


② **Surface treatment:** Grey



Model NO.	Power	Voltage	Luminous	Body Size
DU-WL9112S-1	12W	AC220-240V	695lm	118*148*160mm
DU-WL9112S-2	2*12W	AC220-240V	1425lm	118*148*220mm
DU-WL9115C-2	2*15W	AC220-240V	2400lm	185*Φ145*300mm



Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
CUP LM 110  
SYS LM 90  
RoHS  
CE  
TRIDONIC




LED Chips - PHILIPS CITIZEN  
BRIDGELUX. CREE SHARP SAMSUNG



DU-WL15503C-2A



DU-WL15505C-2A




### Describe

Die-cast aluminum lamp case with black surface; Two ends of the light, round glass mask around black oil, gold aluminum reflective cup; Built-in constant current isolation drive.



- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Black / White

### Design philosophy


Creative simple small waist, personality appearance, aesthetic light and shadow.

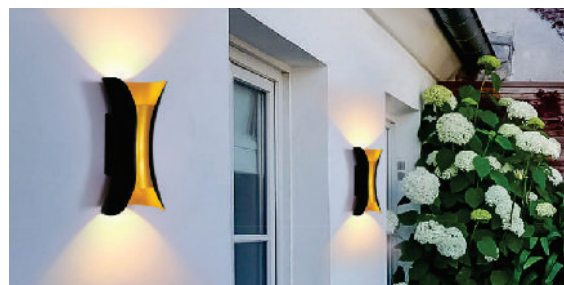

Model NO.	Power	Voltage	Luminous	Body Size
DU-WL15503C-2A	2*3W	AC100-240V	≥350lm	Φ68*130mm
DU-WL15505C-2A	2*5W	AC100-240V	≥600lm	Φ100*190mm

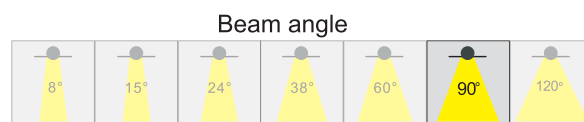

Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC  
LED Drivers - PHILIPS CUI  
MWM TCI TRIDONIC



LED Chips - PHILIPS CITIZEN  
BRIDGELUX. CREE SHARP SAMSUNG





DU-WL18902L-4




DU-WL18902L-6



DU-WL18902L-8



DU-WL18902L-12

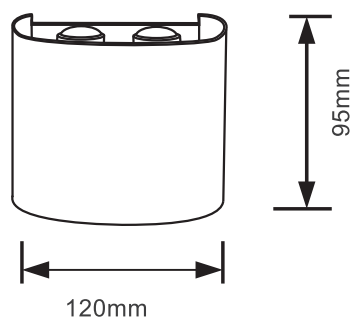

### Describe

Die-cast aluminum lamp body powder white, glass lens, built-in glue constant current isolation waterproof drive;

- ① **Material:** Aluminum+Acrylic
- ② **Optical lens:** PC lens
- ③ **Applicable working environment:** suitable for more scenarios and occasions.
- ④ **Surface treatment:** Black / White

### Design philosophy

The use of integrated die-casting aluminum technology and optical lens, so that the aesthetic and lighting, suitable for more scenarios and occasions.




Model NO.	Power	Voltage	Luminous	Body Size
DU-WL18902L-4	4*2W	AC220-240V	≥770lm	120*38*95mm
DU-WL18902L-6	6*2W	AC220-240V	≥1100lm	185*38*95mm
DU-WL18902L-8	8*2W	AC220-240V	≥1500lm	220*50*96mm
DU-WL18902L-12	12*2W	AC220-240V	≥2200lm	320*60*96mm



Beam angle




Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
CUP LM 110  
CREE  
CITIZEN  
BRIDGELUX  
SAMSUNG



LED Chips - PHILIPS CITIZEN  
BRIDGELUX CREE SHARP SAMSUNG



DU-WL15708R-B



DU-WL15708R-2B

### Describe

LED wall lamp: die-cast aluminum lamp body + bracket; Cup-shaped clear glass lens; Built-in isolated constant current driver,



- ① **Material:** Aluminum+Glass
- ② **Optical lens:** Cup-shaped clear glass lens
- ③ **Applicable working environment:** suitable for more scenarios and occasions.
- ④ **Surface treatment:** Black

### Design philosophy


Adopt clear light glass and optical design, style is simple and atmospheric.



Model NO.	Power	Voltage	Luminous	Body Size
DU-WL15708R-B	8W	AC220-240V	550lm	150*90*140mm
DU-WL15708R-2B	8*2W	AC220-240V	1100lm	150*90*200mm

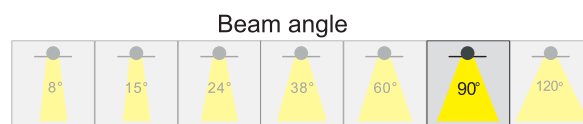


Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS **ETI**  
**MW** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



DU-WL16304S



DU-WL16303L-2


### Describe

Die-cast aluminum housing and drive bottom cover; Milky white silicone sealing ring; Square smooth surface, transparent glass mask around black oil; Square plastic chrome reflecting cup; Flip COB 2x3 strings; The outgoing line of the lamp body is fixed with waterproof apron to prevent tension. Built-in constant current isolation drive



- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Black / White

### Design philosophy


Indoor and outdoor general LED wall lamp, using hidden shape design, light using optical reflective cup, good light effect.

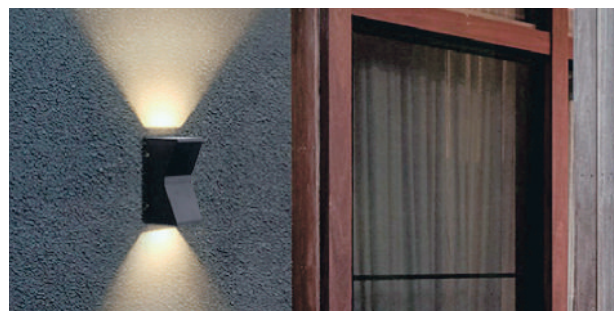

Model NO.	Power	Voltage	Luminous	Body Size
DU-WL16304S	4W	AC220-240V	170lm	79*83*69mm
DU-WL16303L-2	2*3W	AC220-240V	300lm	143*83*69mm



Optional Integrated Dimmable Driver / 1-10V/DIMX/DALI/TRIAC  
LED Drivers - **PHILIPS** **ETI**  
**MW** **ATCI** **TRIDONIC**



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



DU6040








DU6041




DU6041 gr

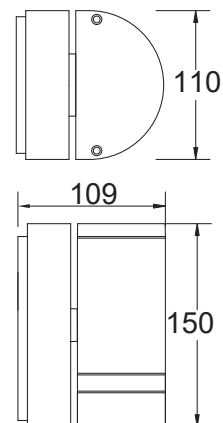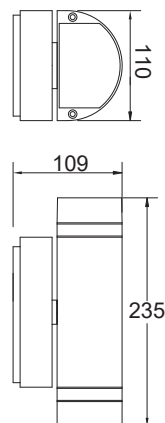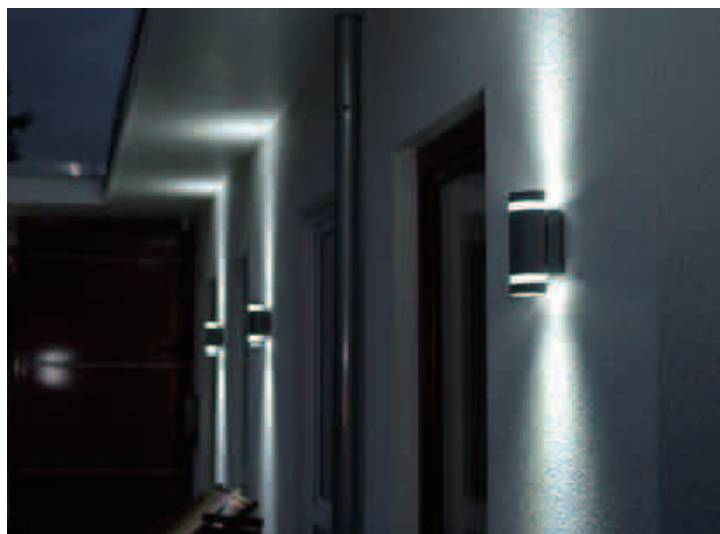
Heavy duty die-cast aluminum versions available in anthracite & silver-grey color in combination with clear glass diffusers, giving a robust construction and a perfect light radiation both functional as decorative.



CLASS I   
IP44  
GU10 2\*7W   
Die Cast Aluminum




Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
LED Drivers - PHILIPS   
  




LED Chips - PHILIPS   
BRIDGELUX, CREE  



DU6050



DU6051



Square execution in die-cast aluminum, with an integrated LED engine comes in a downlight version and in an up & down light version.








CLASS I	CE	h(m)	Eavg(lx)	Emax(lx)	D(m)
IP44		1	159.5	207.2	0.77
LED 7.6W		2	39.87	51.81	1.53
Die Cast Aluminum		3	17.72	23.03	2.30
		4	9.968	12.95	3.07
		5	6.379	8.289	3.83


CLASS I	CE	h(m)	Eavg(lx)	Emax(lx)	D(m)
IP44		1	159.5	207.2	0.77
LED 3.8W		2	39.87	51.81	1.53
Die Cast Aluminum		3	17.72	23.03	2.30
		4	9.968	12.95	3.07
		5	6.379	8.289	3.83

A+

A+

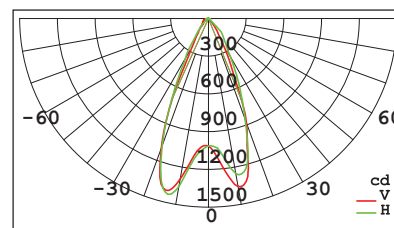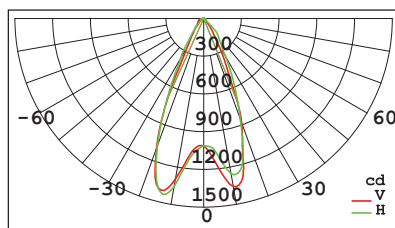

Optional Integrated Dimmable Driver / 1-10V/DMX/DALI/TRIAC  
LED Drivers - PHILIPS  
GTI TRIDONIC




LED Chips - PHILIPS CITIZEN  
BRIDGELUX, CREE SHARP SAMSUNG







DU3304 gr





DU3304 ST




This elegant anthracite or stainless steel wall light fits in perfectly with your contemporary outdoor surrounding. It creates a perfect bi-directional light effect on your walls. The small vertical window in the front adds to the character. The traditional E27 fitting is suitable for energy saving bulbs but also for the latest LED retro-fit bulbs.

CLASS I   
IP44  
E27 11W LED  
Die Cast Aluminum


CLASS II   
IP44  
E27 11W LED  
Stainless steel



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
LED Drivers - PHILIPS   
  



LED Chips - PHILIPS   
BRIDGELUX, CREE  SAMSUNG




DU-WL19206R



DU-WL19206S



DU-WL19206L




### Describe

White frosted aluminum lamp body + bottom cover. The glass lamp cover is fixed with silica gel for sealing protection. Black oil spraying on the four sides of the glass cover corresponds to transparent and clear light at the luminous surface of the light source.



- ① **Applicable working environment:** suitable for more scenarios and occasions.
- ② **Surface treatment:** Grey

### Design philosophy

Modern simple LED wall lamp series are round/square/rectangular, using subtraction design, more concise, see the light but not the light, the light effect is good.

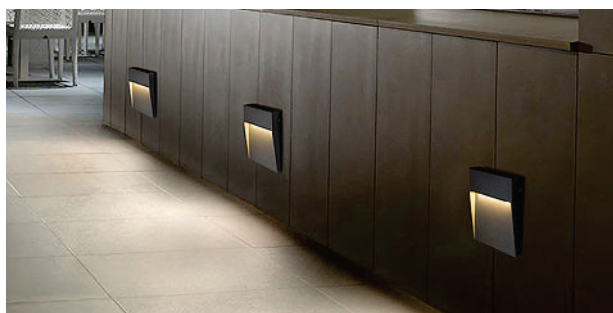


Model NO.	Power	Voltage	Ra	Body Size
DU-WL19206R	6W	AC220-240V	≥70	115*36mm
DU-WL19206S	6W	AC220-240V	≥70	115*115*36mm
DU-WL19206L	6W	AC220-240V	≥70	225*80*32mm

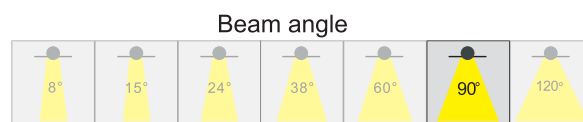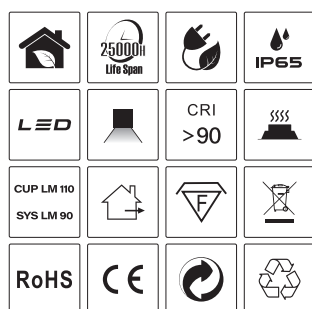




DU-WL20603S



86mm



86mm




### describe

- ① **Material and technology:** PC + 304 stainless steel
- ② **Optical lens:** PC milk white
- ③ **Reflector:** trapezoidal angle step reflection
- ④ **Light source (chip + package / brand + type):** SMD Sanan Tongyifang
- ⑤ **Drive:** Isolated drive、full voltage
- ⑥ **Applicable working environment:** -10 °C--+ 50 °C
- ⑦ **Surface treatment:** black, white, gold, silver


**Input:** AC100-240V, 50/60Hz  
**Life time:** 30000H  
**Ra:** ≥ 90  
**Ta:** 45°C

### design philosophy


86 corner light. IP65, using the photoelectric module solution, the entire light kit can be easily replaced, suitable for the side of the stairs, bathrooms, corridors, passages, outdoor corners. Solved the universal problem of plastic cover and metal cover. Price advantage, metal cover, IP65 waterproof, module can be replaced. Easy installation

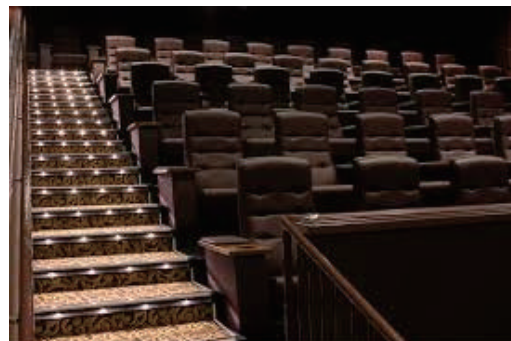


Model NO.	Rated Power	Beam Angle	Luminous Flux	Body Size	Hole Size
DU-WL20603S	3W	45°	150Lm	86x86mm	55x55mm



Optional Integrated Dimmable Driver / 1-10V / DMX / DALI / TRIAC  
 LED Drivers - **PHILIPS** **ETI**  
**MTW** **ATCI** **TRIDONIC**



Beam angle



LED Chips - **PHILIPS** **CITIZEN**  
**BRIDGELUX** **CREE** **SHARP** **SAMSUNG**



## LED Mirror Light

### CREE LED mirror light

#### Dimension

L/W/H: 500 x 90 x 50mm


#### LED light source

LED wattage: 3w x 3 lights

Option: 3w x 1 light / 3w x 2 lights

Lamp: San an SMD 2835 LED

3 HEADS ROUND  
WARM LIGHT

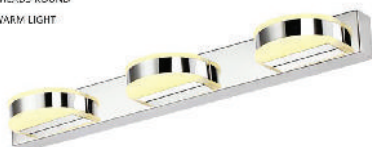

DUCREE027

#### Features

A decent style mirror light IP20, high quality stainless steel combine with frosted Acrylic, good choice for decoration and gentle light at night

- CRI 70-80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Stainless Steel Chrome

### CREE LED mirror light

#### Dimension

L/W/H: 580 x 70 x 45mm

#### LED light source

LED wattage: 10w

Option: 7w-420 x 70 x 45mm

Lamp: San an SMD 2835 LED



DUCREE029

#### Features

A decent style mirror light IP20, high quality stainless steel combine with frosted Acrylic, good choice for decoration and gentle light at night

- CRI 70-80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Stainless Steel Chrome

### CREE LED mirror light

#### Dimension

L/W/H: 500 x 90 x 50mm

#### LED light source

LED wattage: 3w x 3 lights

Option: 3w x 1 light / 3w x 2 lights

Lamp: San an SMD 2835 LED

暖白效果  
RESULTS 3-40W  
三头方形



DUCREE027

#### Features

A decent style mirror light IP20, high quality stainless steel combine with frosted Acrylic, good choice for decoration and gentle light at night

- CRI 70-80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Stainless Steel Chrome

### CREE LED mirror light

#### Dimension

L/W/H: 370 x 100 x 38mm

#### LED light source

LED wattage: 3w x 4 lights

Option: 3w x 6 lights

Lamp: San an SMD 2835 LED



DUCREE030

#### Features

A decent style mirror light IP20, high quality stainless steel combine with frosted Acrylic, good choice for decoration and gentle light at night

- CRI 70-80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Stainless Steel w lacquer

### CREE LED mirror light

#### Dimension

L/W/H: 400 x 40 x 80mm

#### LED light source

LED wattage: 10w

Option: 600 x 40 x 80mm 900 x 40 x 80mm

Lamp: San an SMD 2835 LED





DUCREE026

#### Features

A decent style mirror light IP20, high quality stainless steel combine with frosted Acrylic, good choice for decoration and gentle light at night

- CRI 70-80
- Class II
- Suitable for dimming
- Lamp life: 50,000 hours
- 2 year product warranty
- Finish : Aluminium

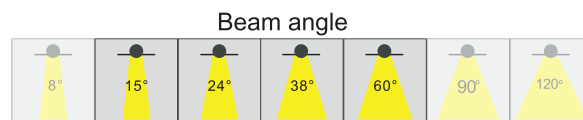

## LED Emergency Sign Light



Model No: <b>DU-ELM2103L</b>	Surface Treatment: SL
Power: 3W	Life Span: 30000H
Charging Time: >24 Hours	Material: Alum+Acrylic
Working Time: >2Hours	Working Temperature: -10~45° C
Batteries: 12V AA 800mAh	IP: 20
Ni-Cd battery	Body Size: 370*200*25mm




Model No: <b>DU-ELM2203L</b>	Surface Treatment: SL+Green
Power: 3W	Life Span: 30000H
Charging Time: >24 Hours	Material: Alum+Glass
Working Time: >2Hours	Working Temperature: -10~45° C
Batteries: 12V AAA 600mAh	IP: 20
Ni-Cd battery	Body Size: 345*140*20mm




### Sign Light Pattern

 V-ELM2103L	 EXIT خروج	 EXIT خروج	 EXIT خروج	 EXIT خروج	 TOILET حمام
 V-ELM2203L	 EXIT خروج	 EXIT خروج	 EXIT خروج	 EXIT خروج	 TOILET حمام

## LED Emergency Light

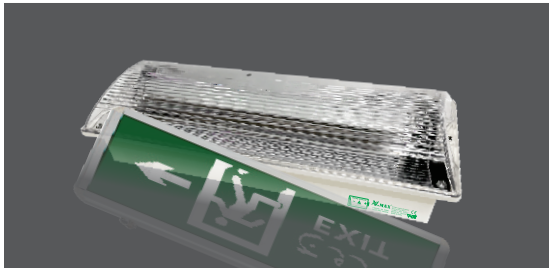

Model No: <b>DU-KN108L Super</b>	Color Temperature: 6500K
Power: SMD 3W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: PC
Charging Time: 20~24 Hours	Working Temperature: -10~45° C
Working Time: 8-Hours	IP: 20
Batteries: 6V 2Ah Sealed	Body Size: 360*137*87mm
Lead-acid battery	

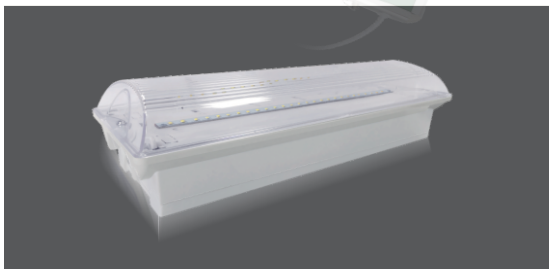

Model No: <b>DU-KN108L</b>	Color Temperature: 6500K
Power: SMD 4W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: PC
Charging Time: 20~24 Hours	Working Temperature: -10~45° C
Working Time: 2-Hours	IP: 20
Batteries: 3.6V 600mAh	Body Size: 360*137*87mm
Ni-Cd battery	




Model No: <b>DUMODIKN-118L</b>	Color Temperature: 6500K
Power: 15W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: PC
Charging Time: 20~24Hours	Working Temperature: -10~45° C
Working Time: 3-Hours	IP: 20
Batteries: 2*4V 900mAh	Body Size: 325*77*51mm
Lead-acid batteries	



# DELUX

LIGHTING

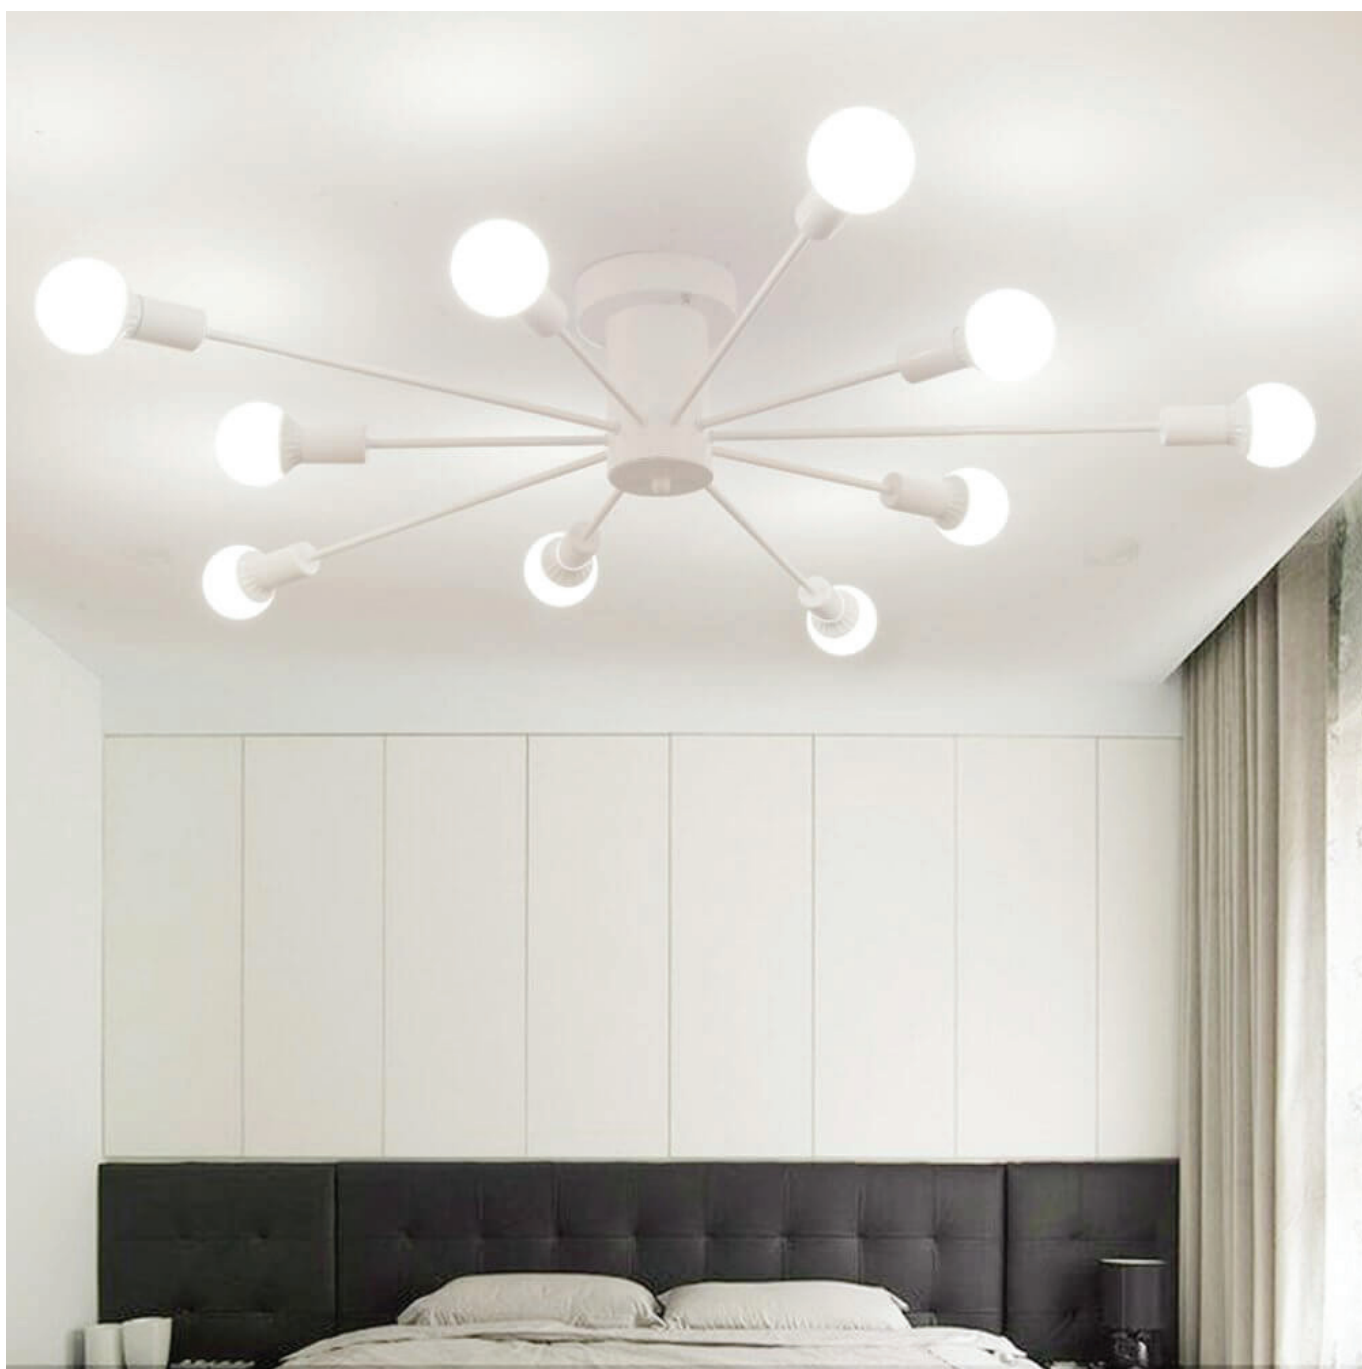



# PRODUCT 2020 CATALOGUE

Sonnleithnergasse 2/4/44Wien 1100  
Österreich  
Vienna - Austril

Contact us:  
T: +43 676 449 0575  
E: [info@deluxlight.eu](mailto:info@deluxlight.eu)